



INSTRUCTION SHEET




End Feeds - EFR | EFL | EF2

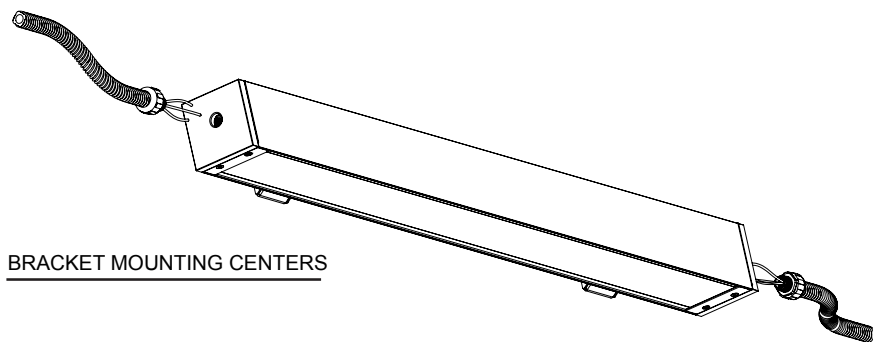

BRACKET MOUNTING CENTERS

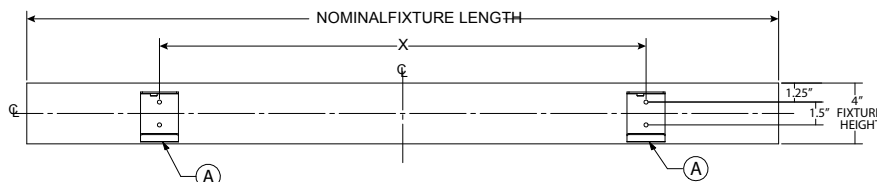

| NOMINAL FIXTURE LENGTH | X |
|------------------------|-----|
| 2' | 16" |
| 3' | 24" |
| 4' | 32" |

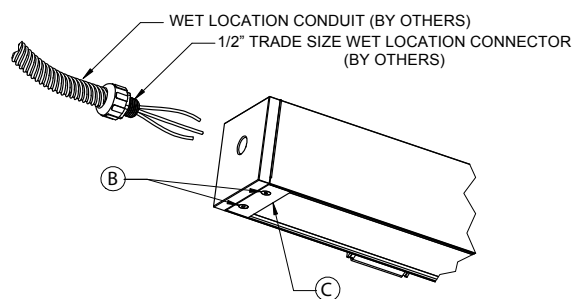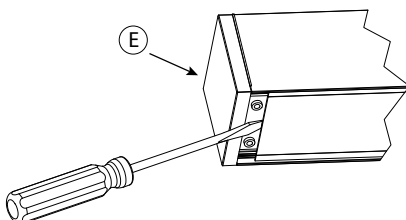

Mounting

1. Install wall brackets (A) as shown using 1/4" bolts (by others) suitable for intended surface.

2. Loosen captive screws (B) and remove endplates (C) from both ends.

3. Remove lens by lifting from end. Use a flat blade screw driver (E) to pry loose. *Note:* take care not to damage lens or gasket.

4. Remove reflector/liner.

5. Hang fixture on wall brackets (A) and install supplied screws (D).

6. Connect 1/2" flex conduit to fixture. **Note:* for wet locations flex conduit must be liquid tight and pipe thread sealant or teflon tape must be used on threads.

7. Make wire connections inside fixture.

8. Reinstall reflector/ liner

9. Reinstall lens. *Note:* firmly press along entire length of lens to ensure a good seal.

10. Reinstall both endplates (C).

note: Continuous run, provide for 1/8" between fixtures.

FEED TYPES



Note: To be installed by a qualified electrician per N.E.C. and all local codes.

820-00029
V-0615