

BKSSL
SOLID STATE LIGHTING

the power of

MICRO NITE™ TWIN STAFF STAR™ STYLE B

PROJECT:	
TYPE:	
CATALOG NUMBER:	
SOURCE:	
NOTES:	

CATALOG NUMBER LOGIC

Example: **TF** - **48** - **B** - **MN** - **LED** - **e21** - **FL** - **BZP** - **12** - **11** - **A** - **PP18B**

Series **TF** - Twin Staff Star™ Pathlight

Stem Length **48** - 24", 30", 36", 42", 48", *54", *60", *66", or *72" (Specify in inches) *For use with Standard Anchor Base Only

Style **B** - 180° Radius

Fixture **MN** - Micro Nite Star™

Source **LED** - 'e' Technology with Integral Driver
Designed for use with remote 12VAC BKSSL® transformers.

LED Type
e37 - 8WLED/2.7K **e17** - 8WLED/4K
e16 - 8WLED/3K **e21** - 8WLED/Amber

Optics*
SP - Spot (Green Indicator) **NFL** - Narrow Flood (Yellow Indicator) **FL** - Flood (Blue Indicator)

Finish
Aluminum Finish **Premium Finish**

Powder Coat Color	Satin	Wrinkle
Bronze	BZP	BZW
Black	BLP	BLW
White (Gloss)	WHP	WHW
Aluminum	SAP	—
Verde	—	VER

ABP	CMG	RMG
Antique Brass Powder	Cascade Mountain Granite	Rocky Mountain Granite
AMG	CRI	SDS
Aleutian Mountain Granite	Cracked Ice	Sonoran Desert Sandstone
AQW	CRM	SMG
Antique White	Cream	Sierra Mountain Granite
BCM	HUG	TXF
Black Chrome	Hunter Green	Textured Forest
BGE	MDS	WCP
Beige	Mojave Desert Sandstone	Weathered Copper
BPP	NBP	WIR
Brown Patina Powder	Natural Brass Powder	Weathered Iron
CAP	OCP	Also available in RAL Finishes See submittal SUB-1439-00
Clear Anodized Powder	Old Copper	

Lens Type
12 - Soft Focus Lens **13** - Rectilinear Lens

Shielding
11 - Honeycomb Baffle

Cap Style
A - 45° **B** - 90° **C** - Flush **D** - 45° less Weep Hole (Interior Use Only) **E** - 90° less Weep Hole (Interior Use Only)

Options
Blank - Anchor Base (Standard, for use with remote transformer)
PP18B - 18" Power Pipe™ stake with 'B' Cap (for use with remote transformer)
PP-TRe20 - Power Pipe™ "T" option with 18" stake and TRe20 Electronic Transformer** (105-300 VAC, 50/60 Hz, Non-Dimming)
SF - Stability Flange

DRIVER DATA

Input Volts	InRush Current	Dimmable	Operation Ambient Temperature
12VAC/DC 50/60Hz	<250mA MAX (non-dimmed)	Magnetic Low Voltage Dimmer	-10°F-130°F

LM79 DATA

BK No.	CCT (Typ.)	Input Watts (Typ.)	CRI (Typ.)
e37	2700K	8.3	90
e16	3100K	8.3	90
e17	4100K	8.3	75
e21	Amber (590nm)	7.8	~

L70 DATA

Minimum Rated Life (hrs.) 70% of initial lumens (L70)
50,000
50,000
50,000
50,000

*OPTICAL DATA

Beam Type	Angle	CBCP	Visual Indicator
Spot	20°	2934	Green Dot
Narrow Flood	25°	1252	Yellow Dot
Flood	30°	945	Blue Dot


B-K LIGHTING

40429 Brickyard Drive • Madera, CA 93636 • USA
 559.438.5800 • FAX 559.438.5900
 www.bklighting.com • info@bklighting.com

SUBMITTAL DATE
01-16-15

DRAWING NUMBER
SUB-2349-00

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.



BKSSL
SOLID STATE LIGHTING


the power of 

MICRO NITE™ TWIN STAFF STAR™ STYLE B


PROJECT:

TYPE:


ANCHOR BASE

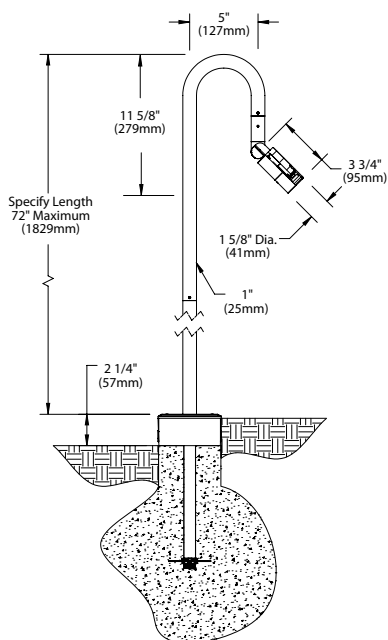


POWER PIPE 'T' (Mounting Option)

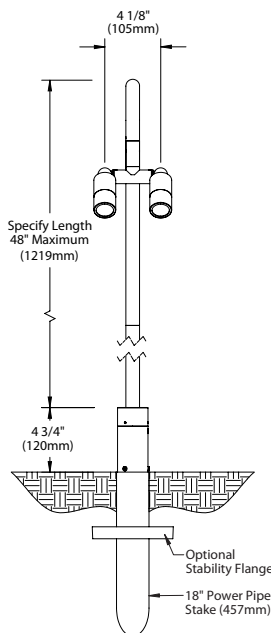


POWER PIPE™ (Mounting Option)

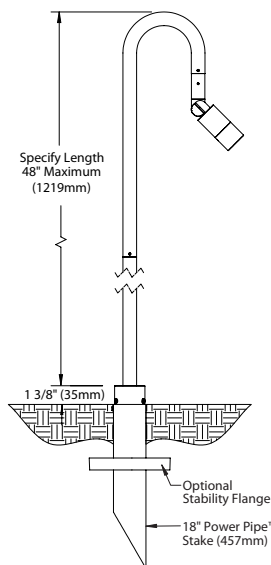


"A/D" CAP




"B/E" CAP



"C" CAP



STABILITY FLANGE (optional)



† dimensions indicated on this submittal are nominal.
Contact Technical Sales if you require more stringent specifications.

SPECIFICATIONS

GreenSource Initiative™

Metal and packaging components are made from recycled materials. Manufactured using renewable solar energy, produced on site. Returnable to manufacturer at end of life to ensure cradle-to-cradle handling. Packaging contains no chlorofluorocarbons (CFC's). Use of this product may qualify for GreenSource efficacy and recycling rebate(s). Consult www.bklighting.com/greensource for program requirements.

Materials

Furnished in Copper-Free Aluminum (Type 6061-T6).

Style

'B' Style provides single bend 180° radius from fixture to stem. Machined 'T' adapter enables independent fixture adjustment from a single mounting position.

Body

Fully machined from solid billet. Unibody design provides enclosed, water-proof wireway and integral heat sink for maximum component life. Integral knuckle for maximum mechanical strength. High temperature, silicone 'O' Ring provides water-tight seal.

Knuckle

The LOCK™ (Locking 'O' Ring Compression Knuckle) is comprised of two components. The first is integral to the body and features an interior, machined taper. The second is machined from solid billet and features a second, reverse angle taper. The resultant mechanical taper-lock allows a full 180° vertical adjustment without the use of serrated teeth, which inherently limit aiming. High temperature, silicone 'O' Ring provides water-tight seal and compressive resistance to maintain fixture position. Design withstands 73 lb. static load prior to movement to ensure decades of optical alignment. Biaxial source control with 360° horizontal rotation in addition to vertical adjustment.

Cap

Fully machined. Accommodates [1] lens or louvre media. Choose from 45° cutoff ('A' or 'D'), 3/4° deep bezel with 90° cutoff ('B' or 'E'), or flush lens ('C') cap styles. Accommodates up to (2) lens or louvre media. 'A' and 'B' caps include weep-hole for water and debris drainage. 'D' and 'E' caps exclude weep-hole and are for interior use only.

Stem

Fully machined, 1" dia. with internal threads for maximum visual appeal. Available in configurable lengths to 48" maximum overall.

Lens

Shock resistant, tempered, glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment. Specify soft focus (#12) or rectilinear (#13) lens.

BKSSL®

Integrated solid state system with 'e' technology is scalable for field upgrade. Modular design with electrical quick disconnects permit field maintenance. High power, forward throw source complies with ANSI C78.377 binning requirements. Exceeds ENERGY STAR® lumen maintenance requirements.

Integral, constant current driver. 12VAC/VDC input. 50/60Hz. Proprietary input control scheme achieves power factor correction and eliminates inrush current. Output, over-voltage, open-circuit, and short circuit protected. Inrush current limited to <250mA. Conforms to Safety Std. C22.2 No. 250.13-12.

Optics

Interchangeable OPTIKIT™ modules permit field changes to optical distribution. Color-coded for easy reference: Spot (SP) = Green. Narrow Flood (NFL) = Yellow. Flood (FL) = Blue.

Installation

Available for installation in three distinct mounting conditions:

Anchor Base (Standard)

Cast aluminum junction box with pass-through cover. 10" galvanized anchor stem for installation into soil or concrete. For use with 12VAC BKSSL remote transformer.

Power Pipe™ (Optional)

Provides a clean transition from wiring system to fixture. Schedule 80, 18" PVC housing for direct burial into soil or concrete. Machined 2-1/4" dia. cap for fixture mounting. Stainless steel hardware. Optional 6" diameter, molded stability flange, which simplifies installation and projects into substrate to reinforce housing stability. For use with 12VAC BKSSL remote transformer.

Power Pipe™ with Transformer Housing (Optional)

Additionally features integral transformer housing fully machined from copper-free aluminum. High temperature, silicone 'O' Ring provides water-tight seal. Integral, TRe20 electronic transformer. 105-300VAC primary voltage. 50/60Hz. Non Dimming. 20VA maximum load.

Remote Transformer

For use with 12VAC BKSSL remote transformer or magnetic transformers only. B-K Lighting cannot guarantee performance with third party manufacturers' transformers.

Wiring

PVC coated, 18AWG, 150V, 60°C rated and certified to UL 1838 standard.

Hardware

Tamper-resistant, stainless steel hardware. LOCK™ aiming screw and canopy mounting screws are additionally black oxide treated for additional corrosion resistance.

Finish

StarGuard®, our exclusive RoHs compliant, 15 stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating.

Warranty

5 year limited warranty.

Certification and Listing

ITL tested to IESNA LM-79. Lighting Facts Registration per USDOE (www.lightingfacts.com). ETL Listed to ANSI/UL Standard 1838 and UL Subject 8750 and Certified to CAN/CSA Standard C22.2 No. 9. RoHs compliant. Suitable for indoor or outdoor use. Suitable for use in wet locations. IP 66 Rated. Made in USA.



*Energy Star is a registered trademark of the United States Environmental Protection Agency.

B-K LIGHTING

40429 Brickyard Drive • Madera, CA 93638 • USA
559.438.5800 • FAX 559.438.5900
www.bklighting.com • info@bklighting.com

SUBMITTAL DATE
01-16-15

DRAWING NUMBER
SUB-2349-00