


COMMERCIAL GRADE LIGHT STRING


COMMERCIAL GRADE LIGHT STRING

adds festive lighting to interiors and exteriors including building outlines, patio lighting, gazebos and other decorative uses. Heavy-duty factory molded sockets on 14-gauge or 16-gauge wire are durable and well suited for a variety of commercial application's where UL Listing is not required. Available in several wire colors, socket sizes and socket spacings. 330 foot bulk reels are great for custom situations and kits are ready to use, just add lamps and plug in!

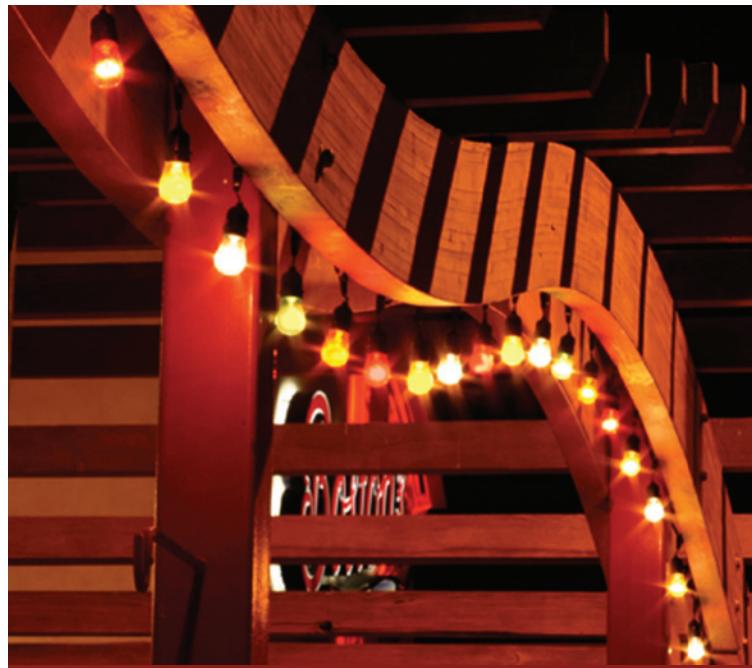


DECORATIVE LIGHTING BUILDING OUTLINES
PATIO LIGHTING TENTS FESTIVE INTERIOR
EVENTS PAVILIONS

Suspended Medium Base

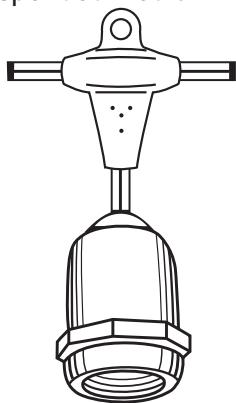


Max Load/socket 25 watts

Medium Base




Max Load/socket 25 watts

Intermediate Base



Max Load/socket 10 watts

Candelabra Base



Max Load/socket 10 watts

FEATURES

- Factory-molded sockets on 14-gauge wire is suitable for commercial applications (16-gauge for kits)
- Formulated PVC sockets form a tight weatherproof seal around the bulb
- Long life, low maintenance linear lighting (for use with Long Life Lamps on facing page)
- Available in bulk reels in candelabra, intermediate and medium base sockets
- Use with LED lamps to run full reel length and save up to 98% in energy costs over incandescent

REELS

LS

M-24 = Medium base , 24" spacing
MS-24 = Medium base suspended, 24" spacing
I-15 = Intermediate base, 15" spacing
C-12 = Candelabra base, 12" spacing

NOTE: LS-M-24 is not available in White

BK = Black wire
GR = Green wire
WH = White wire

KITS

LS

48 foot,
24" spacing
Medium
base kits

M* = Medium base
MS = Medium base suspended

24 - 48

BK = Black wire
GR = Green wire
WH = White wire

LS-M-24-100

100 foot,
24" spacing
Medium base
suspended kits

BK = Black wire
GR = Green wire

LS-M-24-100-BK

100 foot,
24" spacing
Medium base
Black wire

ACCESSORIES



S14-LED-(COLOR)-PREM
Medium base, 120V, 1 watt each,
20,000 hour rated life;
Colors: **AMber**, **BLue**, **GReen**, **REd**,
Warm White, **YEllow**

B7.5C-(COLOR*)

Candelabra base, 7.5 watts each,
8,000 hour rated life;
2-1/8" M.O.L., 1-3/8" dia.
Sold in boxes of 25 only



035-S14-LED-(COLOR)
Medium base, 2.25 watts each,
50,000 hour rated life;
Colors: **AMber**, **BLue**, **GReen**, **Pure
White**, **REd**, **Warm White**, **YEllow**



B7.5S11-(COLOR*)

Intermediate base, 10 watts each,
8,000 hour rated life;
2-1/2" M.O.L., 1-9/16" dia.
Sold in boxes of 25 only



B11S14-(COLOR*)
Medium base, 11 watts each,
8,000 hour rated life;
3-1/2" M.O.L., 1-3/4" dia.
Sold in boxes of 25 only



LS-M/MS-END

Black end cap for medium base
light string (LS-M and LS-MS)

X-END

White end cap for LS-C and LS-I

* Incandescent colors: **AMber**, **BLue**, **CLear**, **FRosted**, **GReen**, **REd**, **YEllow** and **WHite**

TECHNICAL SPECIFICATIONS

Voltage

120V, 60Hz AC operation (LED retrofits have built-in drivers to convert AC power to DC)

Construction

Pre-assembled sockets with set spacing on 14AWG, SPT-2 wire (for LMS and LS-MS); 16 AWG for LS-I and LS-C

Mounting

Do not mount with sockets facing upward! When span distances greater than 19 feet, supplemental support cable is required

Bulk reel

330 feet

Wattage

Maximum wattage per socket is as follows: MS = 25 watts, M = 25 watts, I = 10 watts, C = 10 watts

Maximum run

1800 watts for bulk reels, 1200 watts for 100 foot kits (50 sockets x 25 watts), 600 watts for 48 foot kits (24 sockets x 25 watts)

Power cord

Bulk reels have 24" lead wire and no attached plug; kits have six foot fused power cord molded onto 24" lead

Packaging

Bulk reel or poly bag kits

Dimmers

S14-LED-PREM and incandescent bulbs are dimmable with standard incandescent dimmer – be sure to use high capacity type for loads over 600 watts. 035-S14-LEDs are not dimmable.

Lamp specs

See ACCESSORIES above