

# QUATRO

**ZOOM**  
an Atlantic Lighting brand

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Catalog number: \_\_\_\_\_

## LED 42 series direct/indirect wall mount

GET A QUOTE >

### specifications | 120-277 Volt

- The Quatro has a heavy wall alloy 6063-T5 extruded aluminum housing. This fixture is offered in two nominal lumen levels, from 550 lumens/foot to 1100 lumens/foot. In 4-foot fixture lengths, the 1100 L/ft. is designed to replace a standard single T5HO. Contact factory for other lumen levels.
- Wall mount uses a 2 7/8" x 3 1/4" two piece mounting bracket. Designed to attach to a 3 1/2" junction box.

#### OSRAM PrevaLED - Linear LED Board

- CRI >80
- Even and diffuse light
- Color variation within 3-step MacAdam Ellipse




#### OSRAM Optotronic LED Driver


- 120V through 277V universal driver is standard. Contact factory for 347V.
- Dimmable, instant 100% light (1%-100%) via: 0-10V protocol. 5-year warranty.

Listed to UL 1598 and Canadian standards. Suitable for damp locations. Available photometrics at atlantic-lighting.com.

Specifications and dimensions subject to change without notice.

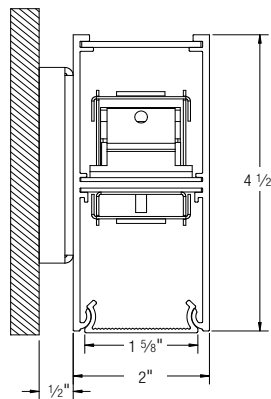

**(W) Wall mount** shown with snap-in-lens in the direct position & flexible white in the indirect position

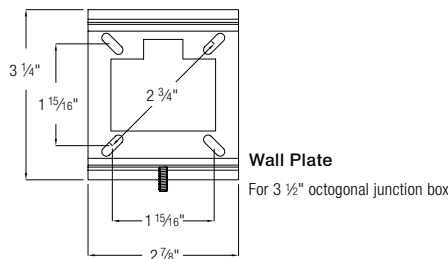

<b>Low Output (LO)</b>	550 Lumens/ft.	5W/ft.
<b>Medium Output (MO)</b>	1100 Lumens/ft.	9W/ft.

\*Wattages based on a 4-foot fixture with a single driver. Listed lumens and wattages are component measurements. See photometrics for fixture values.

### ordering data

**MODEL** ..... **QWM-42**  
QWM-42 4x2 Quatro wall mount

**DIRECTION** ..... **DI**  
DI Direct/Indirect

**DIRECT SHIELDING** ..... **SNW**  
SNW Snap-in white lens

**INDIRECT SHIELDING** .....  
FW Flexible white acrylic lens  
DC Dust cover

**DIRECT - NOMINAL LUMENS/FT\*** .....  
LEDLO 550 lumen/ft. 5W/ft.  
LEDMO 1100 lumen/ft. 9W/ft.

**INDIRECT - NOMINAL LUMENS/FT\*** .....  
LEDLO 550 lumen/ft. 5W/ft.  
LEDMO 1100 lumen/ft. 9W/ft.

**COLOR TEMPERATURE** .....  
3K 3000K  
35K 3500K  
4K 4000K

**LENGTH** .....  
2 2 ft.  
3 3 ft.  
4 4 ft.  
6 6 ft.  
8 8 ft.  
X Replace X with run length. (specify run length in feet)

**MOUNTING** ..... **W**  
W Wall mount

**FINISH** .....  
TW Textured white  
TS Textured silver  
TB Textured black  
CC Custom color

**DIMMING** .....  
0-10V DC standard, leave box blank  
2WR 2-wire. TRIAC forward-phase or ELV reverse-phase (100%-5%) (TRIAC is 120V only)  
DAL DALI (100%-1%)

**OPTIONS** .....  
DMX DMX analog interface, remote (120V only)

\*Listed lumens and wattages are component measurements. See photometrics for fixture values.

**P/N Example:** QWM-42-DI-SNW-FW-LEDMO-LEDLO-3K-4-W-TW

**QWM-42-DI-SNW-FW-LEDMO-LEDLO-3K-4-W-TW**  
model direction indirect shielding lumens temp finish mounting length options  
direct shielding



**ATLANTIC LIGHTING**

T: 508 678-5411 | F: 508 678-5408 [www.atlantic-lighting.com](http://www.atlantic-lighting.com)

082218 ZL18-041