




Project _____

Type _____

Notes _____

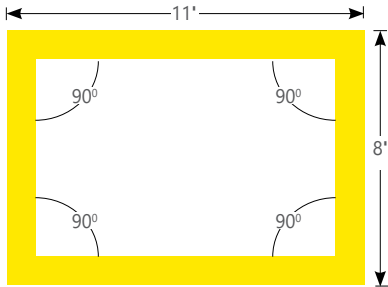

TB2WDLEDPAT	REC	90+90+90+90	38'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

TB2WDLEDPAT	ASO	120+60+50+130	30'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

TB2WDLEDPAT	OPR	90+90	31'
PRODUCT ID	PATTERNS	CORNER DEGREES	LENGTH/FT

TOP VIEW - Rectangle Corner Pattern

TOP VIEW - Corner Pattern

TOP VIEW - Open Shape Corner Pattern

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

Ordering Guide

PRODUCT ID	PATTERNS	CORNER DEGREES	LUMENS/FT INDIRECT	LUMENS/FT DIRECT	CRI
TB2WDLEDPAT Beam 2 Wall Direct/Indirect	SQ square regular lit corners	90 90 degrees	300 300 lm/ft	400 400 lm/ft - Min.	80 80 CRI
TB2WDLEDPAT Beam 2 Wall Direct	REC rectangle regular lit corners	# other degree	650 650 lm/ft	1000 1000 lm/ft - Max.	90 90 CRI
TB2WILEDPAT Beam 2 Wall Indirect	ASO other shape regular lit corners		N/A not applicable*	N/A not applicable*	
B2SQWDLEDPAT Beam 2 Square Wall Direct	OPR open shape regular lit corners				
B2SQWILEDPAT Beam 2 Square Wall Indirect					
TB3WDLEDPAT Beam 3 Wall Direct/Indirect					
TB3WDLEDPAT Beam 3 Wall Direct					
TB3WILEDPAT Beam 3 Wall Indirect					
TB4WDLEDPAT Beam 4 Wall Direct/Indirect					
TB4WDLEDPAT Beam 4 Wall Direct					
TB4WILEDPAT Beam 4 Wall Indirect					
B6WDLEDPAT Beam 6 Wall Direct					

Outputs between listed min and max are available. Consult factory for outputs outside of the listed range. *For direct only.

Outputs between listed min and max are available. Consult factory for outputs outside of the listed range. *For indirect only.

COLOUR TEMP.	SHIELDING INDIRECT (OPT.)	SHIELDING DIRECT (OPT.)	LENGTH/FT	SPECIFY LENGTH	FINISH	VOLTAGE	DRIVER
27 2700 K	SO spotless lens	SO spotless lens	# total pattern length	NL nominal	AP aluminum paint	120 120V	DP dimming (0-10V) 1%
35 3500 K	SL surroundlite*	L louver *		EX exact	W white	277 277V	LT Lutron ⁽¹⁾
30 3000 K	SLA surroundlite asymmetric*	0.25G 0.25" Glo lens			BLK black	347 347V	BI bi-level dimming
40 4000 K	0.25G 0.25" Glo lens*	1.25M 1.25" Step lens, lum. end cap**			C custom	UNV universal	O other ⁽²⁾
	* For SurroundLite products only.	**Only available with Beam 2 SL Wall ***Only available with Beam 4 SL Wall					(1) Specify system (2) Please consult factory; see page 2

CIRCUITS	BATTERY	OTHER	IC CONTROLS (OPTIONAL)	CUSTOM (OPTIONAL)
1 1 circuit 2 2 circuits +E(#) emergency circuit ⁽³⁾ +NL(#) night light circuit ⁽³⁾ +GTD(#) generator transfer device ⁽³⁾	B# battery pack 4' sections	F fuse ⁽⁴⁾ D dust cover	DS# daylight sensor OS# occupancy sensor DOS# daylight & occupancy sensor EN# Enlighted integral ⁽⁵⁾ ENR# Enlighted remote ⁽⁵⁾ WC# wireless control dimming	C custom
(3) Specify quantity	Requires 120V or 277V Please consult factory	(4) Requires 120V or 277V	(5) Please consult factory See integrated controls guide for more details.	Please specify

● LIT CORNER FEATURES


The Lit Corner system allows continuous illumination all the way through the corner section

To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

Regular Illuminated Corner - A fully illuminated corner that lies on the same plane. There are two corner options available for Regular Lit Corners: **Open Shape Corner** and **Closed Shape Corner**

TIP: Provide sketches illustrating corner types and locations required.

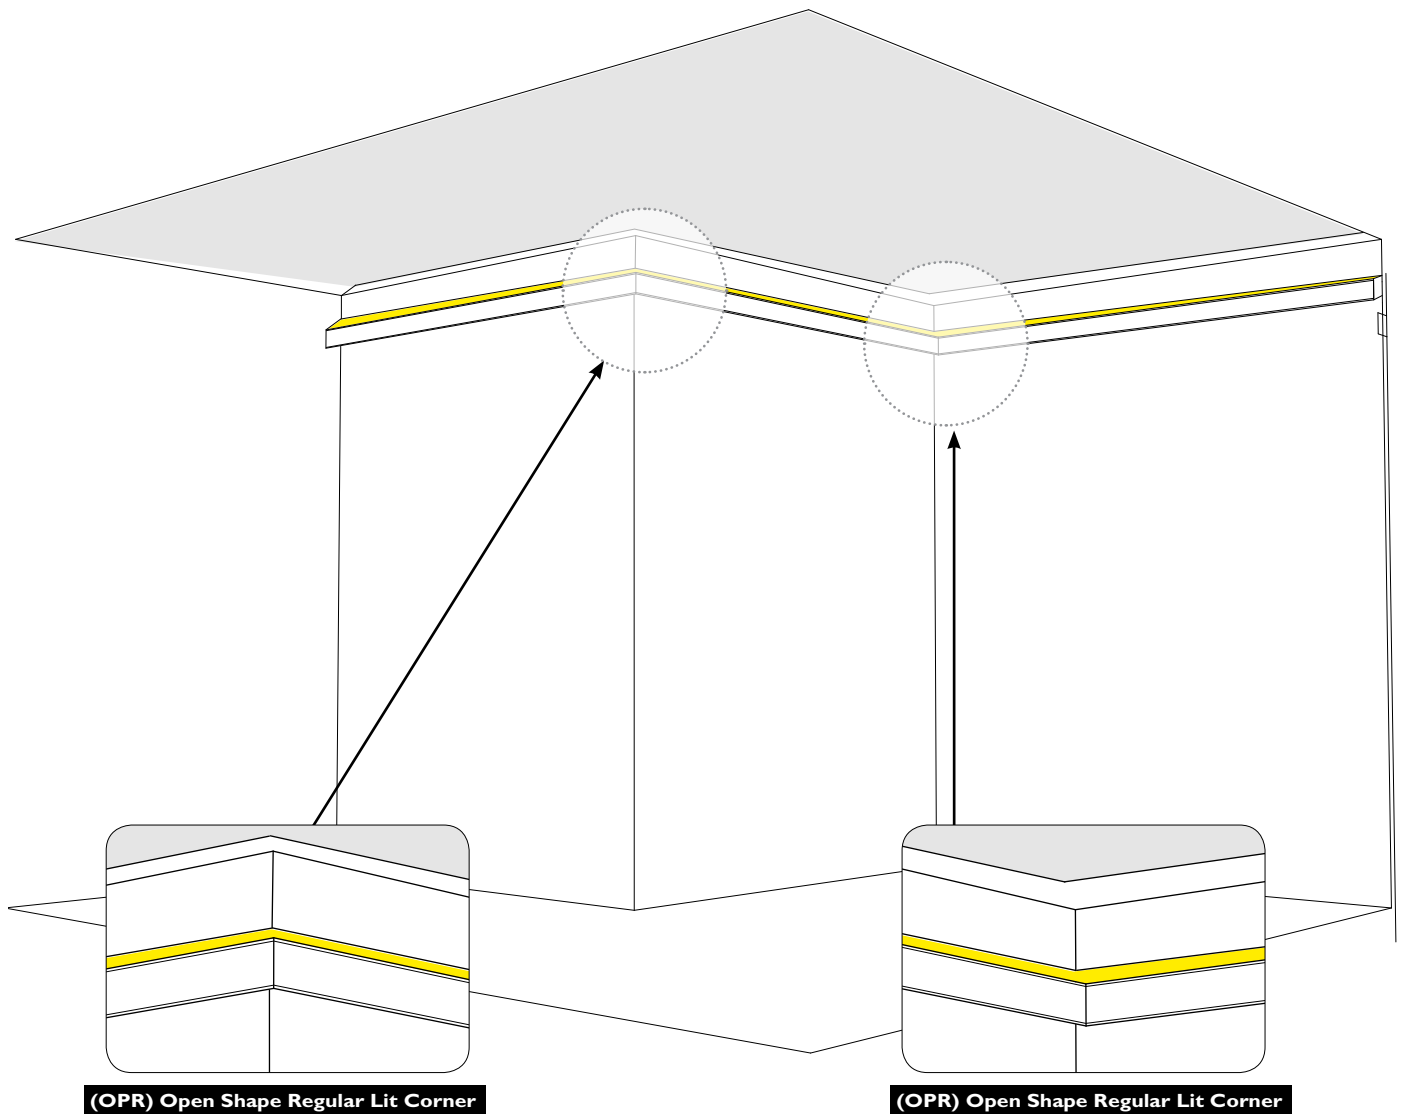

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

