


For Remote Transformers  
See Sheets TRSS Series, TR Series,  
Power Pipe, Power Pipe II or Power  
Canopy in Accessory Section.

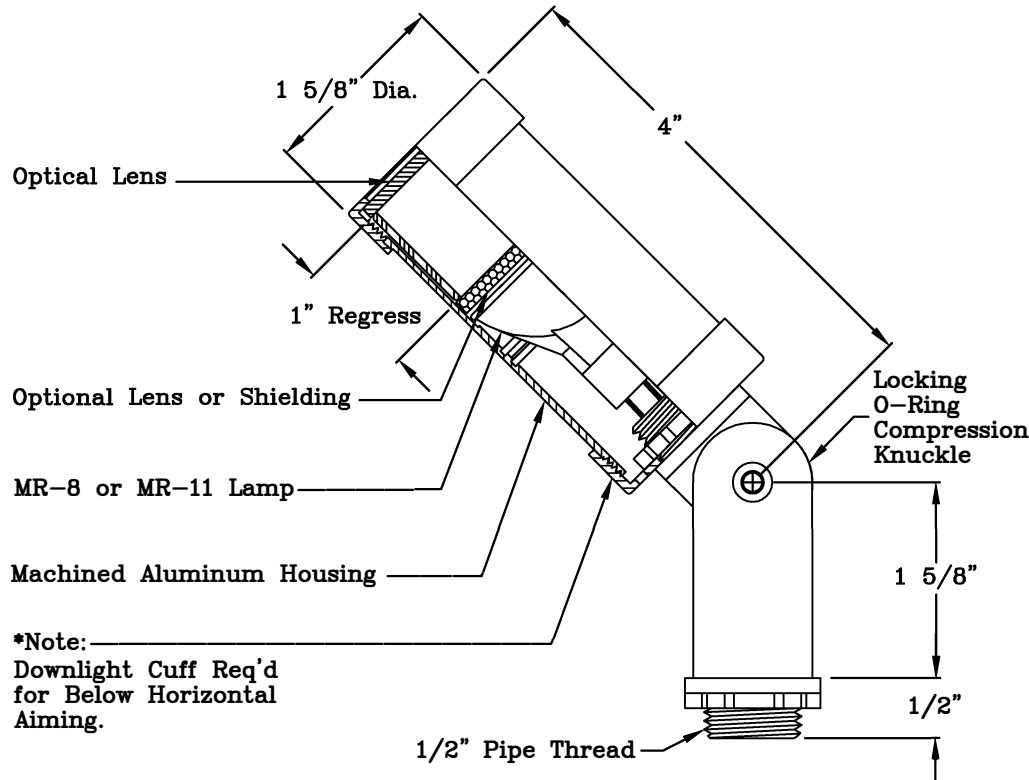

**CATALOG NUMBER LOGIC**

EXAMPLE: MSII - 13 - BLP - 7 - 9 - 11

Series: \_\_\_\_\_

Lamp Type: \_\_\_\_\_

- 0 - By Others
- 10 - FTA(12W), 8° N. Spot (MR-11)
- 11 - FTB(20W), 8° N. Spot (MR-11)
- 12 - FTC(20W), 19° Spot (MR-11)
- 13 - FTD(20W), 28° Flood (MR-11)
- 88 - ---(20W), 10° Spot (MR-8)
- 89 - ---(20W), 23° N. Flood (MR-8)
- 90 - ---(20W), 42° Flood (MR-8)

Finish: \_\_\_\_\_

Powdercoat	Satin	Wrinkle
Bronze	BZP	BZW
Black	BLP	BLW
White (Gloss)	WHP	WHW
Aluminum	SAP	---
Verde	---	VER

Mounting: \_\_\_\_\_

- 7 - Uplight (Standard)
- 8 - Downlight\*

Lens Type: \_\_\_\_\_

- 9 - Clear (Standard)
- 10 - Spread
- 13 - Rectilinear

Shielding: \_\_\_\_\_

- 11 - Honeycomb Baffle

**Features:**

All Precision Machined Aluminum Construction.

Locking O-Ring Compression Knuckle (THE L.O.C.K.™) Allows Vertical to Horizontal Aiming and Provides Integral, Sealed Wireway.

Lamp Holder With 250°C, 18 Ga. Wire Leads (Leads Extend 6" Beyond Mounting Knuckle).

Utilizes any MR-8 or MR-11 Lamp Up To 20 Watts.

Gasketed Lens Cap, Forms Raintight Optical Compartment With Clear, Tempered, Glass Lens, Factory Sealed.

Bottom of Fixture Provides Ventilation and Contains Spray Shield.

Polyester Powdercoat Finishes Standard, (Specify).



<b>MICRO STAR II™</b>		
8/03	<b>B-K LIGHTING, INC.</b>	DRAWING NUMBER SUB-101A-04