



"Accessory Options"




Cutoff Snoot

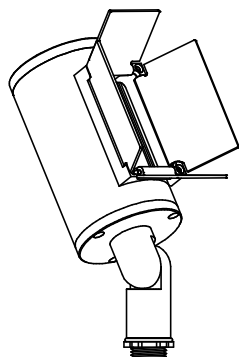


Adj. Barn Doors

Features:

- All Precision Machined Aluminum Construction.
- Locking O-Ring Compression Knuckle (THE L.O.C.K.™) Allows Vertical to Horizontal Aiming and Provides Integral, Sealed Wireway.
- T4 Lamp Holder With 250°C, 18 Ga. Wire Leads (Leads Extend 6" Beyond Mounting Knuckle).
- Utilizes any T4 Lamp Up To 50 Watts.
- Gasketed End Caps, Forms Raintight Optical Compartment With Clear, Tempered, Glass Lens, Factory Sealed.
- Polyester Powdercoat Finishes Standard, (Specify).

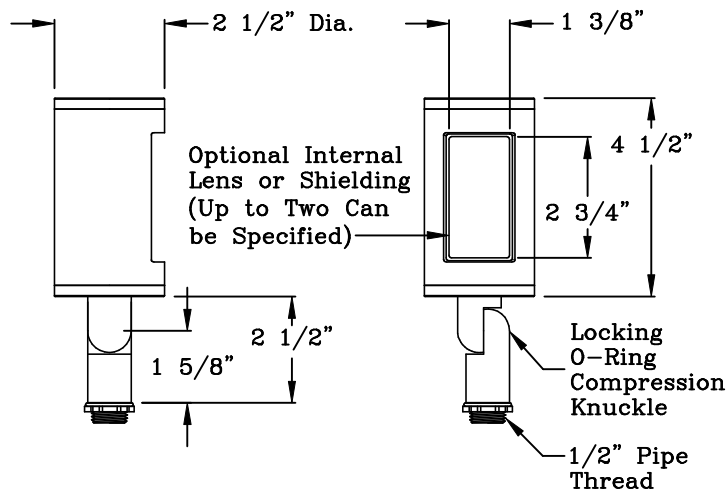

Spot

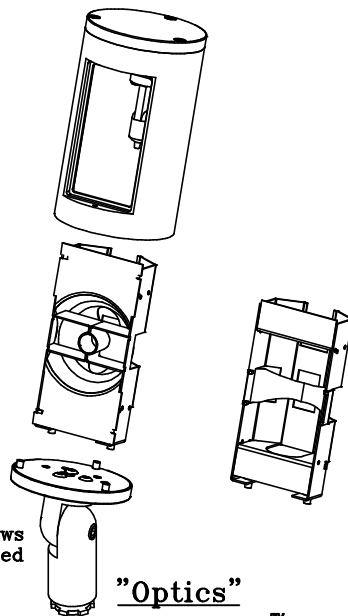

Flood

"Optics"

See OPTIKIT™ Submittal Sheet for Field Interchangeable Optics Ordering Information.



ETL LISTED
CONFORMS TO ANSI/UL
STANDARD 1838 AND UL SUBJECT 8750
CERTIFIED TO CAN/CSA
STANDARD C22.2 NO. 9

CATALOG NUMBER LOGIC

EXAMPLE: RU - FL - 64 - BLP - 9 - 11 - CS

Series: _____

Optics: _____

SP - Spot

FL - Flood

Lamp Type: _____

0 - By Others

20 - Q20T4/CL-12V(20W)

64 - Q35T4/CL-12V(35W)

65 - Q50T4/CL-12V(50W)

Finish: _____

Powdercoat	Satin	Wrinkle
Bronze	BZP	BZW
Black	BLP	BLW
White (Gloss)	WHP	WHW
Aluminum	SAP	—
Verde	—	VER

Lens Type: _____

9 - Clear (Standard)

10 - Spread

13 - Rectilinear

Shielding: _____

11 - Honeycomb Baffle

Accessories: _____

CS - Cutoff Snoot

BD - Adjustable Barn Doors

For Remote Transformers
See Sheets TRSS Series, TR Series,
Power Pipe, Power Pipe II or Power
Canopy in Accessory Section.

RUSHMORE SERIES™

8/03

B-K LIGHTING, INC.

DRAWING NUMBER
SUB-1200-02