

PRELIMINARY

BSS260 | GENERAL INFORMATION



Rectilinear LED up/down light fixture

Project: _____ Type: _____



FEATURES

The BSS260 is a cable suspended linear LED luminaire for general lighting applications. The 3-1/4" wide by 5-1/2" high extruded aluminum housing provides up and down light elements. The two LED light sources are fitted with frosted acrylic lenses and 1/4" thick machined aluminum end caps finish off the fixture ends.

SPECIFICATIONS

Fixture constructed of extruded aluminum, frosted extruded acrylic lenses and machined aluminum end caps

Standard finishes include satin anodize, or Fluoroscope White (semi-matte), white (semi-gloss), black (semi-matte), matte black, silver, platinum, bronze and primer powder coat, applied post production (consult factory for custom finishes)

Available in nominal lengths of 24"-89" single fixtures and continuous runs

Continuous runs fitted with quick connects for simple, efficient wiring

Available with single or dual circuit wiring of up light and down light elements and independent Wattage/foot options

Standard driver offered with 0-10V dimming or non-dim

Other dimming driver options available (refer to supplemental driver details sheet for availability)

Remote mounted emergency battery backup available (ordered separately, consult factory for details)

LEDs available in 3000K, 3500K, 4000K, 5000K, all with a typical 84-85 CRI and color consistency within a 3 step MacAdam ellipse

Lamp life rated at 50,000 hours


Limited five year warranty

UL and C-UL listed for dry and damp locations

IBEW manufactured and assembled

Made in U.S.A.

SECTION

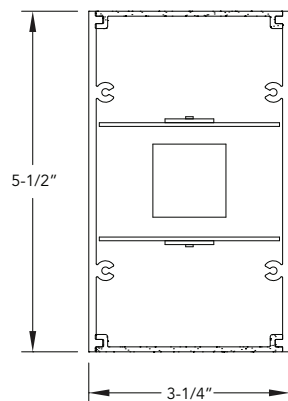

PERFORMANCE

NOMINAL LENGTH	WATTS/ft.	TOTAL WATTS	LUMINAIRE LUMENS	EFFICACY
45"	16.5 (2 X 8.25)	61.8	6082	98

*Note: All data reflects fixtures with 3000K LEDs

GET A QUOTE >

BSS260 +


NOMINAL FIXTURE LENGTH 24: 24" 34: 34" 45: 45" 56: 56" 67: 67" 78: 78" 89: 89"	COLOR TEMPERATURE 30: 3000K - 84 CRI 35: 3500K - 85 CRI 40: 4000K - 85 CRI 50: 5000K - 85 CRI	DRIVER [Non-Dimming] leave blank for non-dimming [Dimming] DIM: Advance 0-10V EHD: Lutron EcoSystem H-series HLM: Lutron Hi-lume A-Series	CIRCUIT 1: single circuit 2: dual circuit	UP LIGHT WATTS/FOOT 5: 5 W/ft. 8: 8.5 W/ft. CF: consult factory for custom output	DOWN LIGHT WATTS/FOOT 5: 5 W/ft. 8: 8.5 W/ft. CF: consult factory for custom output	MOUNT CM48: cable mount 48" cable length CM96: cable mount 96" cable length CF: consult factory for custom mounting	RUN CONFIGURATION SIN: single STA: starter ADD: adder TER: terminator	FINISH SA: satin anodize FW: Fluoroscope white (semi-matte) WH: white (semi-gloss) BL: black (semi-matte) MB: matte black SL: silver PT: platinum* BZ: bronze PR: primer CF: consult factory for custom color
--	--	--	--	---	---	---	--	--

Note: Remote driver ordered separately, refer to supplemental driver details sheet for availability.
 * A standard finish requiring a two step coating process, premium will apply.

MOUNTING

ORDERING CODE

DESCRIPTION

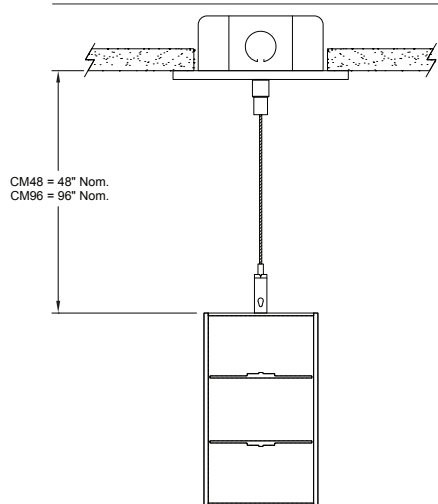

CM48 and CM96

CABLE MOUNT

Mounting option includes:

- \varnothing 1/16" x 48" (CM48) or 96" (CM96) aircraft cables
- 18 gauge x 60" (CM48) or 102" (CM96) SJT power cable (in coordinating finish)
- Bracket bars
- \varnothing 5" white canopies
- Ceiling couplers
- Side exit cable grippers