

3" square corner mount LED fixture for outdoor locations and remote driver operation

Project: \_\_\_\_\_ Type: \_\_\_\_\_



### FEATURES

The BSW750 is a corner mount, linear LED luminaire for outdoor locations. The 3" x 3" extruded aluminum surface mount housing tucks into architectural junctures and fitted with a two-sided, frosted acrylic lens. Each fixture is paired with a remote mounted, wet location 0-10V dimming or non-dimming driver and housing.

### SPECIFICATIONS

Fixture constructed of an extruded aluminum housing, frosted, extruded acrylic lens and sheet aluminum end caps

Standard finishes as shown below

Available in nominal lengths of 2'-8' single fixtures and continuous runs

Fixtures wired with 10' low voltage leads and Ø7/8 hole for back feeding

Included remote 120-277V wet location driver offered with 0-10V dimming or non-dim and surface mount aluminum enclosure

Standard outputs are 430, 865 and 1135 lumens per foot


LEDs available in 2700K, 3000K, 3500K and 4000K, within a 3 step MacAdam ellipse, all with 80+ CRI typical

Life: 50,000 hours L<sub>70</sub>

Limited five year warranty

UL and C-UL listed for wet locations

### SECTION

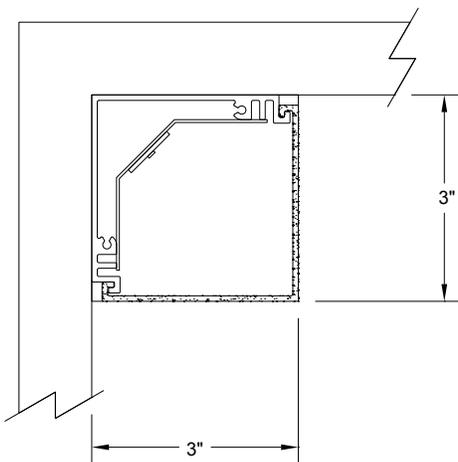

[GET A QUOTE >](#)

### PERFORMANCE

NOMINAL LENGTH	OUTPUT	LUMENS/ft.	WATTS/ft.	LUMINAIRE LUMENS	EFFICACY (LPW)
4'	L: low	430	4.0	1729	108
	R: regular	865	8.0	3459	108
	H: high	1135	10.5	4539	108

Note: All data reflects fixtures with 3500K LEDs

### BSW750 -

<b>NOMINAL FIXTURE LENGTH*</b> 2: 24-5/8" 3: 36-5/8" 4: 48-5/8" 5: 60-5/8" 6: 72-5/8" 7: 84-5/8" 8: 96-5/8"	<b>COLOR TEMPERATURE</b> 27: 2700K-80+ CRI 30: 3000K-80+ CRI 35: 3500K-80+ CRI 40: 4000K-80+ CRI	<b>DRIVER [remote]</b> RN: non-dimming RD: 0-10V dimming, 5%	<b>LIGHT OUTPUT (lumens per foot)</b> L: low - 430 R: regular - 865 H: high - 1135	<b>MOUNT</b> SM: surface mount	<b>RUN CONFIGURATION</b> SN: single ST: starter AD: adder TR: terminator	<b>FINISH</b> AW: architectural white (semi-matte) WH: white (semi-gloss) BL: black (semi-matte) MB: matte black ESS: environmental satin silver BZ: bronze PR: primer CF: consult factory for custom finish
--	--	--	---	-----------------------------------	--	--




Note: Each fixture includes a remote driver matched for fixture length and light output  
 \*Actual dimension dependent on run configuration

MOUNTING

ORDERING CODE

DESCRIPTION



SM

SURFACE MOUNT

- Use appropriate fastener through Ø3/16" holes in housing
- 10' low voltage leads exit out the rear at an end

EPA CALCULATIONS

LENGTH ORDERING CODE	EPA
2	0.98 ft <sup>2</sup>
3	1.45 ft <sup>2</sup>
4	1.94 ft <sup>2</sup>
5	2.41 ft <sup>2</sup>
6	2.88 ft <sup>2</sup>
7	3.35 ft <sup>2</sup>
8	3.83 ft <sup>2</sup>