

## BUBBLE UP





# BUBBLE UP

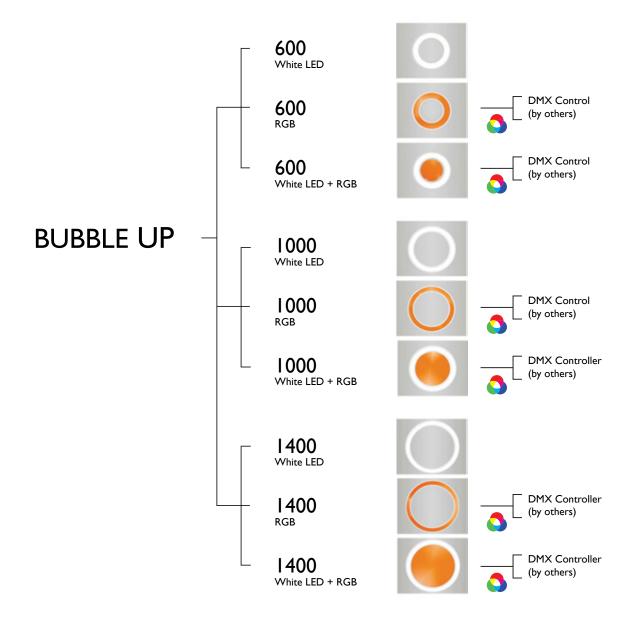

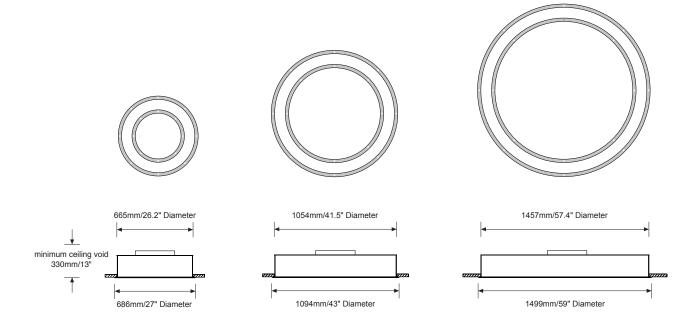

94 1001

### GENERAL SPECIFICATION

**Recessed housing:** Steel and aluminum suitable for new or existing non insulated construction, drywall or plasterboard ceilings. Luminaires are mounted by cable suspension within the ceiling cavity. Anchoring of cables to load bearing ceiling structure (by others).

Centre disc: For non illuminating center version, drywall disc to be supplied and installed by others. Drywall disc to be painted to match ceiling.

Versions: Recessed luminaires available in three diameters: 685mm/27", 1092mm/43" and 1495mm/59".

**Diffusers:** Single piece opal acrylic, retained by metal rings and white painted screws.

Drivers: Luminaires supplied with HPF electronic drivers, 120/277V. 0-10V dimming standard for white LEDs.

RGB control: Luminaires require a DMX controller by others.

**Electrical:** Through branch wiring. J box and driver housing easiliy accessible.

Finish: White powder coated.

Approvals: ETL.



### **RECESSED**

### A BUBBLE UP - RING OF WHITE LEDS



Code:	Lamp:	CCT:	Lumens:	Diameter:	Photometry:
94 1001	95W <b>LED</b>	3000K	7500	685mm/27"	File# <b>941001</b>
94 1011	160W <b>LED</b>	3000K	13500	1092mm/43"	File# <b>941011</b>
94 1021	215W <b>LED</b>	3000K	18000	1498mm/59"	File# <b>941021</b>

B BUBBLE UP - RING OF RGB LEDS





Code:	Lamp:	Diameter:	Photometry
94 1101	45W RGB LED	685mm/27"	File# <b>94110</b>
94 1111	80W RGB LED	1092mm/43"	File# <b>94111</b> 1
94 1121	110W RGB LED	1498mm/59"	File# <b>94112</b>

BUBBLE UP - RING OF WHITE LEDS WITH RGB CENTER





Code:	Lamp:	*CCT:	*Lumens:	Diameter:	Photometry:
94 1201	95W LED + 27W RGB LED center	3000K	7500	685mm/27"	File# <b>941201</b>
94 1211	160W LED + 55W RGB LED center	3000K	13500	1092mm/43"	File# <b>941211</b>
94 1221	215W LED + 80W RGB LED center	3000K	18000	1498mm/59"	File# <b>941221</b>

<sup>\*</sup> Data for white LEDs only.

