

## INSIDE/OUTSIDE



## GENERAL SPECIFICATION

**Body:** Aluminum.

**Finish:** Powder coated.

**Suspension:** Stainless steel cables.

**Power cable:** Silver braided.


**Drivers:** HPF electronic drivers for 120-277V (EU-240V), 0-10V, 5% dimming.

**Remote Mounting Of Drivers:** Wire Size 18 AWG - Max distance (from canopy to drivers) 9.5', Wire size 16 AWG - Max distance 19.5', Wire size 14 AWG - Max distance 29.5'. Drivers must be accessible after installation.


**Mechanical:** Luminaires attached directly to the J box (by others - North America only).

**L70 @25deg C:** > 50,000 hrs.


**Delivered Lumens:** Delivered lumens & LPW based on Flush Lens, 3000K (min 80 CRI) for White LEDs only.

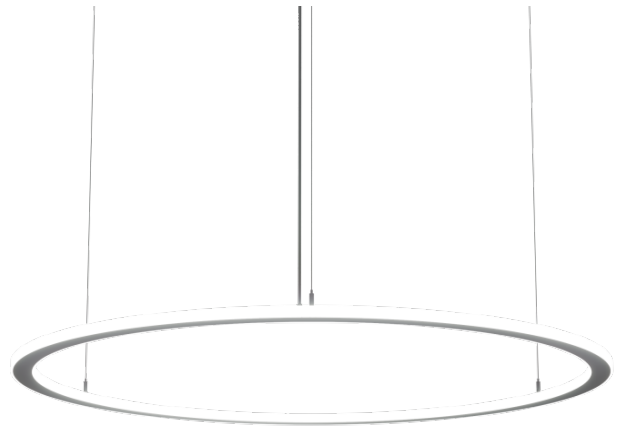


MOUNTINGS & OPTICS




Interior - Pendant-  
Inside/Outside




95 2005




95 2010




95 2020




95 2030




95 2040



95 2050



95 2060



95 2090

## HOW TO ORDER

## A SPECIFY LUMINAIRE

Code:	Diameter (A):	Power (LED):	Delivered lms:	LPW:	# of Sections:	Suspension Points:
95 2005	660mm/26"	47W	3759	80	1	3
95 2010	914mm/36"	66W	5223	79	1	3
95 2020	1219mm/48"	87W	6869	79	1	3
95 2030	1524mm/60"	113W	9005	80	1	3
95 2040	1829mm/72"	138W	10888	79	1	4
95 2050	2134mm/84"	157W	10888	79	1	4
95 2060	2438mm/96"	183W	14515	79	2	6
95 2090	3657mm/144"	281W	22294	79	2	8

## B SPECIFY CCT/COLOR (OUTSIDE)

T30	3000K (min 80 CRI)
T35	3500K (min 80 CRI)
T40	4000K (min 80 CRI)
TRD	Red
TGN	Green
TBL	Blue

## C SPECIFY CCT/COLOR (INSIDE)

S30	3000K (min 80 CRI)
S35	3500K (min 80 CRI)
S40	4000K (min 80 CRI)
SRD	Red
SGN	Green
SBL	Blue

## D SPECIFY LENS

FD	Flush Lens
PL	Protruding Lens

## E SPECIFY SUSPENSION

S1	Vertical, Remote Driver (2 canopies required for 1829mm/72" to 2438mm/96" and 4 canopies required for 3657mm/144")
S2	Hub, Remote Driver (available up to 2134mm/84" dia only)
S3	Vertical, Integral Driver (available up to 1219mm/48" dia only)
S4	Hub Integral Driver (available up to 1219mm/48" dia only)

## F SPECIFY FINISH


BL	Black
MS	Metallic Silver
WH	White

EXAMPLE SPECIFICATION CODE


952005/T35/SRD/FD/S1/BL

## DIMENSIONAL DIAGRAMS


S1 VERTICAL - REMOTE DRIVER

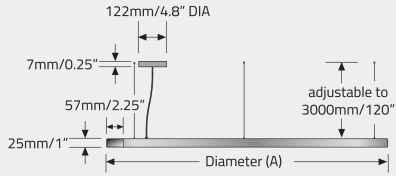


S2 HUB - REMOTE DRIVER

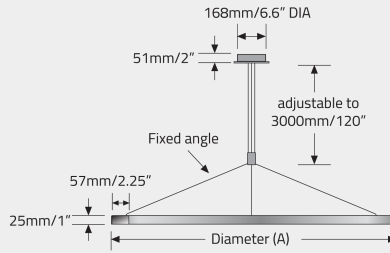

S3 VERTICAL - INTEGRAL DRIVER

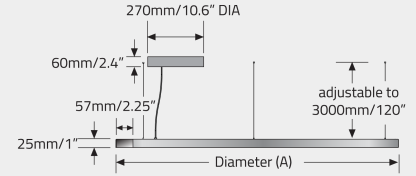

S4 HUB - INTEGRAL DRIVER

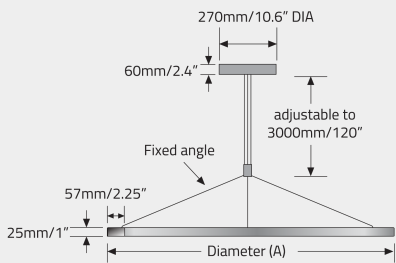

## APPROVALS

