


RING

WHITE LED DIRECT & INDIRECT ILLUMINATION

[GET A QUOTE >](#)

 WEB PIN™ 238

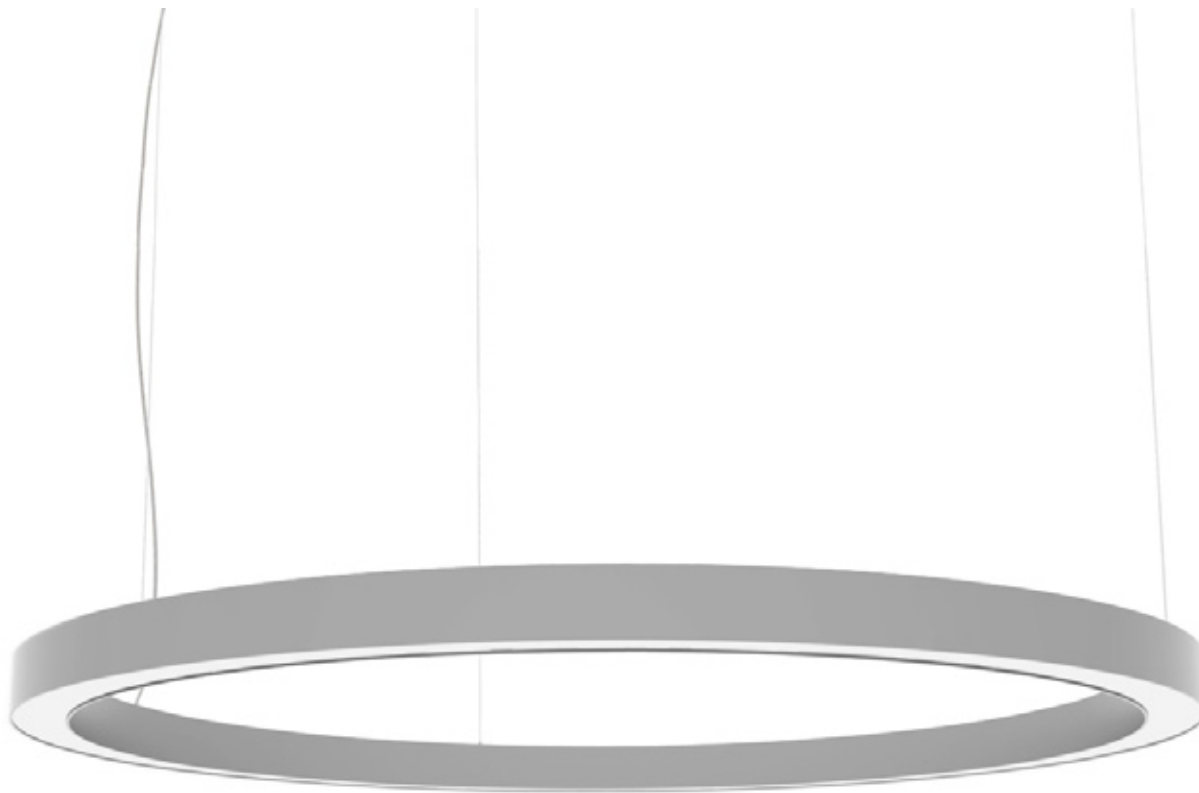

GENERAL SPECIFICATION

Body and trim: Steel and aluminum.

Top cover plate: White powder coated steel.

Finish: Powder coated.

Suspension: Stainless steel cables.

Power cable: Silver braided.

Diffusers: Opal polycarbonate, supplied in sections.


Drivers: Integral, HPF electronic drivers for 120-277V, 0-10V, 1% dimming standard.

Mechanical: Luminaires mount directly over J box (by others).

Approvals: ETL

Ring DIA:	Supplied sections:	Suspension points:	Total weight:
610mm/24"	1	3	8Kg/18lbs
914mm/36"	1	3	12Kg/26lbs
1219mm/48"	1	3	15Kg/35lbs
1524mm/60"	1	3	19Kg/42lbs
1829mm/72"	1	3	24Kg/52lbs
2133mm/84"	1	6	27Kg/60lbs
2438mm/96"	3	6	32Kg/69lbs
2743mm/108"	3	6	34Kg/75lbs
3657mm/144"	4	8	46Kg/102lbs
5486mm/216"	6	12	69Kg/152lbs

Ring luminaires are supplied in several sections for assembly on site. Luminaires are pre-wired and connect electrically and mechanically.



RING

WHITE LED DIRECT & INDIRECT ILLUMINATION

WEB PIN™ 238

A SPECIFY LAMP/LUMINAIRE TYPE

Code:	Diameter (A):	Source:	Color CCT:	CRI:	Direct lms:	Indirect lms:	Efficacy LPW:	L70 @25°C (77°F):	Photometry:
95 0100	610mm/24"	87W LED	3000K	min 80	6038	2492	98	> 50,000 hrs	File# 950100
95 0101	610mm/24"	87W LED	4000K	min 80	6233	2572	101	> 50,000 hrs	File# 950101
95 0110	914mm/36"	144W LED	3000K	min 80	9438	5024	100	> 50,000 hrs	File# 950110
95 0111	914mm/36"	144W LED	4000K	min 80	9742	5186	104	> 50,000 hrs	File# 950111
95 0170	1219mm/48"	180W LED	3000K	min 80	12644	5032	98	> 50,000 hrs	File# 950170
95 0171	1219mm/48"	180W LED	4000K	min 80	13052	5194	101	> 50,000 hrs	File# 950171
95 0120	1524mm/60"	252W LED	3000K	min 80	16704	8444	100	> 50,000 hrs	File# 950120
95 0121	1524mm/60"	252W LED	4000K	min 80	17243	8716	103	> 50,000 hrs	File# 950121
95 0180	1829mm/72"	288W LED	3000K	min 80	19962	8444	99	> 50,000 hrs	File# 950180
95 0181	1829mm/72"	288W LED	4000K	min 80	20606	8716	102	> 50,000 hrs	File# 950181
95 0130	2133mm/84"	375W LED	3000K	min 80	24127	14166	102	> 50,000 hrs	File# 950130
95 0131	2133mm/84"	375W LED	4000K	min 80	24905	14623	105	> 50,000 hrs	File# 950131
95 0190	2438mm/96"	396W LED	3000K	min 80	25408	14166	100	> 50,000 hrs	File# 950190
95 0191	2438mm/96"	396W LED	4000K	min 80	26227	14623	103	> 50,000 hrs	File# 950191
95 0140	2743mm/108"	454W LED	3000K	min 80	29769	15301	99	> 50,000 hrs	File# 950140
95 0141	2743mm/108"	454W LED	4000K	min 80	30729	15795	102	> 50,000 hrs	File# 950141
95 0150	3657mm/144"	605W LED	3000K	min 80	39293	19951	97	> 50,000 hrs	File# 950150
95 0151	3657mm/144"	605W LED	4000K	min 80	40561	20595	100	> 50,000 hrs	File# 950151
95 0160	5486mm/216"	987W LED	3000K	min 80	62501	35712	100	> 50,000 hrs	File# 950160
95 0161	5486mm/216"	987W LED	4000K	min 80	64517	36864	103	> 50,000 hrs	File# 950161

B SPECIFY SUSPENSION

S1 Type A

S2 Type B (not available with 2743mm/108" DIA or larger)

GET A QUOTE >

C SPECIFY FINISH

WH White

MS Metallic silver

D SPECIFY OPTIONS

PR1 Lumen reduction to approximately 50% of standard output

PR2 Lumen reduction to approximately 75% of standard output

EN Encelium/Zigby control

OD Opal diffuser for uplight

SS Seperate switching (two power cables supplied)

Example Specification Code: 95 0110 • S1 • WH

