



INSTRUCTION SHEET





Standard Feed - STND

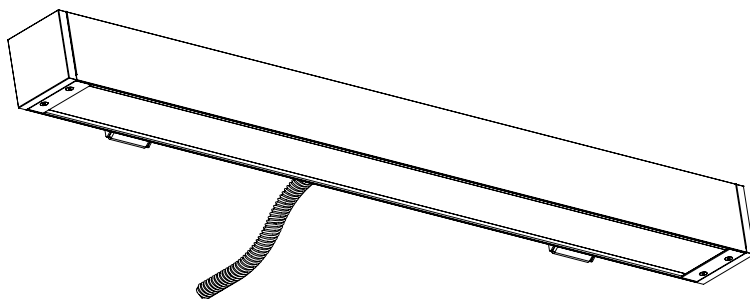

BRACKET MOUNTING CENTERS

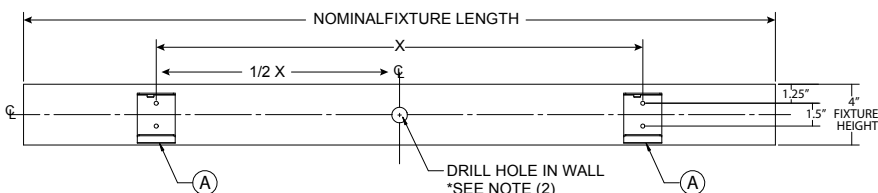

NOMINAL FIXTURE LENGTH	X
2'	16"
3'	24"
4'	32"

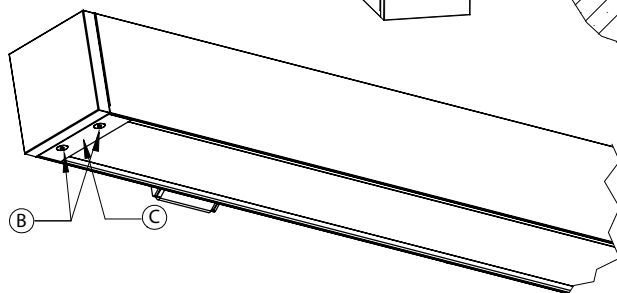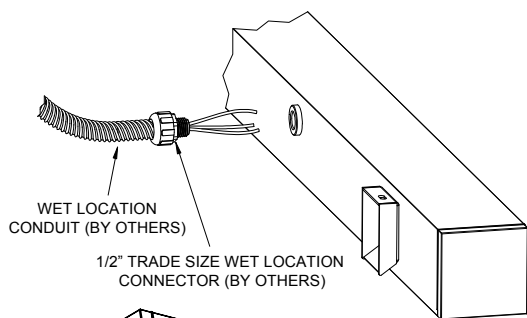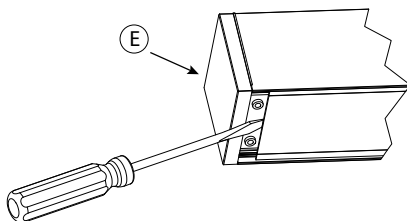

Mounting

1. Install wall brackets (A) as shown using 1/4" bolts (by others) suitable for intended surface.
 2. Drill hole in wall as shown for flex conduit. **Note:** size of hole depends on size of conduit connector and must be large enough to allow conduit connector to protrude into wall and allow fixture to tilt as it is hung on wall brackets.
 3. Loosen captive screws (B) and remove endplates (C) from both ends.
 4. Remove lens by lifting from end. Use a flat blade screw driver (E) to pry loose. **Note:** take care not to damage lens or gasket.
 5. Remove reflector/liner
 6. Connect 1/2" flex conduit to fixture. **Note:** for wet locations flex conduit must be liquid tight and pipe thread sealant or teflon tape must be used on threads.
 7. Hang fixture on wall brackets (A) and install supplied screws (D).
 8. Make wire connections inside fixture.
 9. Reinstall reflector/liner.
 10. Reinstall lens. **Note:** firmly press along entire length of lens to ensure a good seal.
 11. Reinstall both endplates (C).
 12. Seal hole around conduit connector with silicone, caulking or wall patch.
- note:** Continuous run, provide for 1/8" between fixtures.

Note: To be installed by a qualified electrician per N.E.C. and all local codes.

820-00031

V-0615