

DESCRIPTION

The Accord™ redefines lighting by improving on aesthetics, comfort and energy savings. The Accord provides the right amount of light while eliminating surface shadows commonly found in parabolics. Therefore, Accord increases the comfort level while providing significant energy savings.

Surface mount Accord units are designed for areas that do not use a grid-ceiling type system. Ideal for use in corridors, stairwells, hospitals and schools.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction

Low profile housing is formed from heavy gauge cold rolled steel and welded to form a rigid frame. Backplate is provided with knockouts and mounting holes for surface mounting.

Controls

The Accord LED is equipped standard with a 0-10V continuous dimming driver that works with any standard 0-10V control/dimmer. Combine with energy-saving products like occupancy sensors, daylighting controls, and lighting relay panels from Cooper Controls (www.coopercontrol.com) to maximize energy savings.

Electrical

Long-Life LED system coupled with electrical driver to deliver optimal performance. LED's available in 3000, 3500 or 4000k with a CRI ≥ 85. Projected life is 50,000 hours at 70% lumen output. cULus listed. Electronic drivers are available for 120-277V applications. A 0-10V dimming driver is standard.

Driver Access

Driver can be accessed from below without tools.

Finish

Painted after fabrication. Electrostatically applied baked matte white polyester powder enamel finish. Multistage cleaning cycle, iron phosphate coating with rust inhibitor.

Reflectors

Reflector has high reflectance baked matte white enamel finish for luminous uniformity.

Shielding

Positively retained frosted acrylic profile lenses provide a soft but effective distribution of light.

Compliance

Modules are UL recognized components and indoor luminaires are cULus listed for 25°C ambient environments, RoHS compliant, and LED modules comply with IESNA LM-79 and LM-80 standards. DesignLights™ Consortium Qualified (high lumen version only). Refer to www.designlights.org Qualified Products List under Family Models for details.



2ACS LED


2' X 2' TROFFER LED LAMPS

Specification Architectural Troffer Surface Mount Series


accord
Enhanced Lighting Series

LINEAR LED PLATFORM

DESIGNLIGHTS CONSORTIUM

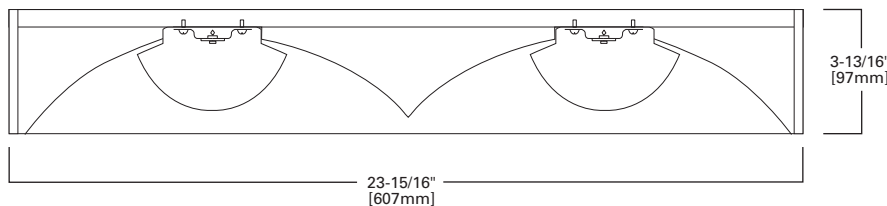


MOUNTING DATA

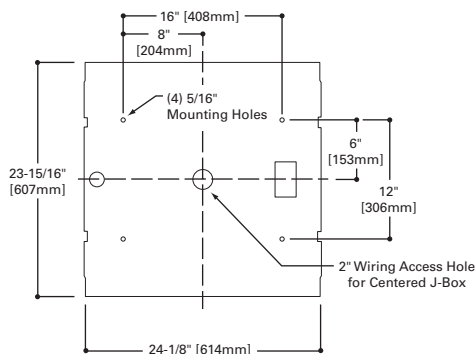


NOTE: 2' x 2' and 2' x 4' allow for row mounting.

LAMP CONFIGURATIONS




PHOTOMETRICS



2AC-LD2-25-UNV-L835-CD1-U
Dimming Driver
Linear LED 3500K
Spacing criterion:
(H) 1.2 x mounting
height, (L) 1.3 x
mounting height
Lumens: 2563
Input Watts: 28.4W
Efficacy: 90 LPW
Test Report:
2AC-LD2-25-UNV-
L835-CD1-U.IES

Candlepower

Angle	Along H	45°	Across ⊥
0	891	891	891
5	883	886	891
10	870	875	884
15	847	858	867
20	813	831	845
25	770	796	814
30	718	754	778
35	660	708	738
40	597	656	694
45	530	599	645
50	461	538	591
55	392	475	535
60	324	409	470
65	257	343	384
70	193	271	276
75	132	189	173
80	77	106	94
85	32	38	34
90	0	0	0



2AC-LD2-33-UNV-L835-CD1-U
Dimming Driver
Linear LED 3500K
Spacing criterion:
(H) 1.2 x mounting
height, (L) 1.3 x
mounting height
Lumens: 3370
Input Watts: 39.3W
Efficacy: 86 LPW
Test Report:
2AC-LD2-33-UNV-
L835-CD1-U.IES

Candlepower

Angle	Along H	45°	Across ⊥
0	1175	1175	1175
5	1165	1168	1176
10	1147	1155	1167
15	1115	1130	1144
20	1070	1095	1114
25	1014	1048	1074
30	945	994	1026
35	868	932	973
40	785	863	914
45	696	787	849
50	605	706	780
55	514	623	706
60	424	536	621
65	336	450	506
70	252	356	361
75	174	245	226
80	101	137	123
85	40	48	45
90	0	0	0

Coefficients of Utilization

rc rw RCR	Effective floor cavity reflectance 20%																				
	80%			70%			50%			30%			10%			0%					
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84	84	84	84
2	99	90	83	78	96	88	82	77	85	80	75	82	77	73	79	75	72	69	69	69	69
3	90	79	71	64	87	78	70	64	75	68	63	72	66	62	69	65	60	58	58	58	58
4	82	70	61	54	80	69	60	54	66	59	53	64	58	53	62	56	52	50	50	50	50
5	76	63	53	47	73	61	53	46	59	52	46	57	51	45	55	50	45	43	43	43	43
6	70	56	47	41	68	55	47	41	53	46	40	52	45	40	50	44	39	37	37	37	37
7	65	51	42	36	63	50	42	36	49	41	36	47	40	35	46	40	35	33	33	33	33
8	60	46	38	32	59	46	38	32	44	37	32	43	36	31	42	36	31	29	29	29	29
9	56	43	34	29	55	42	34	29	41	34	29	40	33	28	39	33	28	26	26	26	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	26	24	24	24	24

Coefficients of Utilization

rc rw RCR	Effective floor cavity reflectance 20%																				
	80%			70%			50%			30%			10%			0%					
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	109	104	100	96	106	102	98	94	97	94	91	93	91	88	90	88	86	84	84	84	84
2	99	90	84	78	96	89	82	77	85	80	75	82	77	73	79	75	72	69	69	69	69
3	90	79	71	64	87	78	70	64	75	68	63	72	66	62	69	65	61	58	58	58	58
4	82	70	61	54	80	69	60	54	66	59	53	64	58	53	62	56	52	50	50	50	50
5	76	63	54	47	73	61	53	46	59	52	46	57	51	45	55	50	45	43	43	43	43
6	70	56	47	41	68	55	47	41	54	46	40	52	45	40	50	44	40	37	37	37	37
7	65	51	42	36	63	50	42	36	49	41	36	47	40	35	46	40	35	33	33	33	33
8	60	47	38	32	59	46	38	32	44	37	32	43	36	32	42	36	31	29	29	29	29
9	56	43	34	29	55	42	34	29	41	34	29	40	33	28	39	33	28	26	26	26	26
10	53	39	31	26	51	39	31	26	38	31	26	37	30	26	36	30	26	24	24	24	24

Zonal Lumen Summary

Zone	Lumens	%Fixture
0-30	692	27.0
0-40	1132	44.2
0-60	2009	78.4
0-90	2563	100.0
0-180	2563	100.0

Luminance Data

Angle in Deg	Average 0-Deg cd/sm	Average 45-Deg cd/sm	Average 90-Deg cd/sm
45	2016	2279	2454
55	1838	2228	2509
65	1636	2183	2444
75	1372	1964	1798
85	988	1173	1049

Zonal Lumen Summary


Zone	Lumens	%Fixture
0-30	912	27.1
0-40	1492	44.3
0-60	2646	78.5
0-90	3370	100.0
0-180	3370	100.0

Luminance Data

Angle in Deg	Average 0-Deg cd/sm	Average 45-Deg cd/sm	Average 90-Deg cd/sm
45	2648	2994	3230
55	2411	2922	3311
65	2139	2864	3221
75	1808	2546	2349
85	1235	1481	1389

ORDERING INFORMATION

SAMPLE NUMBER: 2ACS-LD2-33-UNV-L835-CD1-U

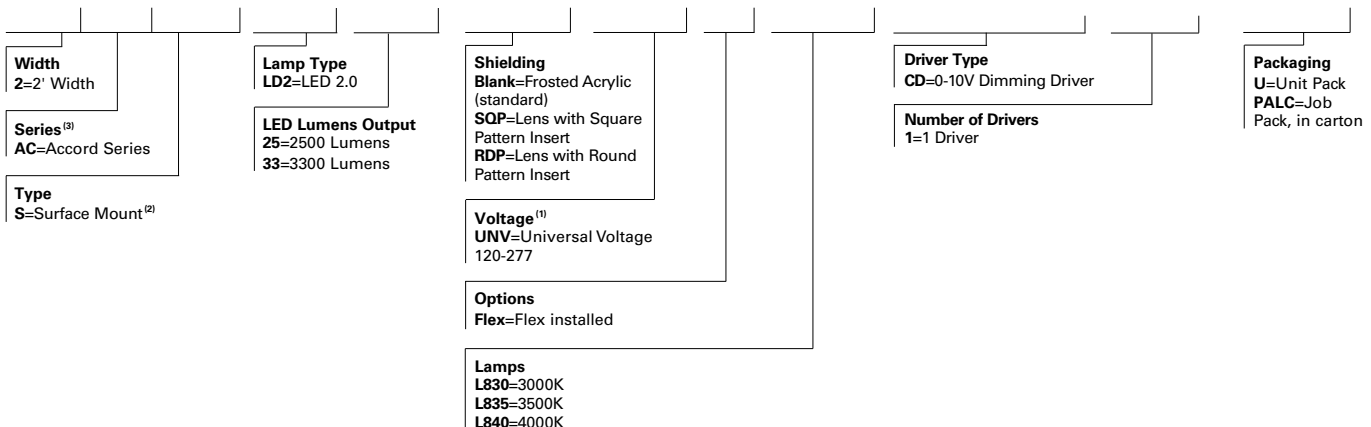

NOTES: (1) Products also available in non-US voltages and frequencies for international markets. (2) Surface mount accord is not designed for continuous row mount applications. (3) DesignLights™ Consortium Qualified (high lumen only). Refer to www.designlights.org Qualified Products List under Family Models for details.

For complete product data, reference the Fluorescent Specification binder. Specifications & dimensions subject to change without notice. Consult your Cooper Lighting Representative for availability and ordering information.

SHIPPING INFORMATION

Catalog No.	Wt.
2ACS-LD2-25	22 lbs.
2ACS-LD2-33	22 lbs.

