

A19

LED Bulbs

Product Description

The Cree LED A19 bulbs deliver up to 800 lumens of warm 2700K light or cool 5000K light, while consuming at least 84% less energy than the incandescent bulbs they replace. These lamps feature a consistent and balanced omnidirectional light source within a real glass bulb, turn on instantly, and are compatible with most standard incandescent dimmers. Powered by Cree's LED Filament Tower™ Technology, the Cree LED A19 bulbs are ENERGY STAR**** qualified and are designed to last 25,000 hours.


Performance Summary

Utilizes Cree LED Filament Tower™ Technology
Made in the U.S.A. of U.S. and imported parts
Delivered Light Output: 450 lumens (40W eq); 800 lumens (60W eq)
Input Power: 6 watts (40W eq), 9.5 watts (60W 27K eq), 9 watts (60W 50K eq)
CRI: 80
CCT: 2700K, 5000K*
Limited Warranty†: 3 year limited warranty
Lifetime: Designed to last at least 25,000 hours
Dimming: Dimmable down to 5% with select dimmers**

A19



2.4"

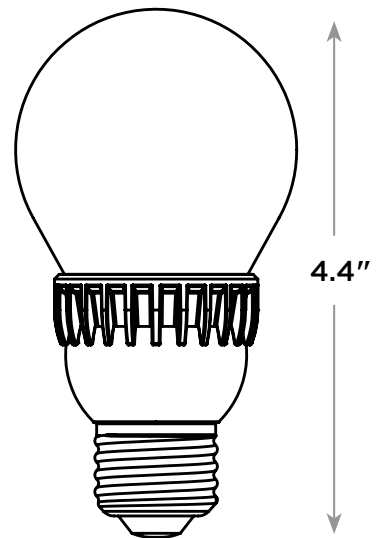

Ordering Information

Example: A19-60W-27K-T24

QUICKSHIP™

For full list of Cree Quick Ship products visit www.cree.com/lighting/quickship

Product	Watt Equivalent	CCT	Voltage	Base	CRI	Options
A19	40 40W (450 lumens) 60 60W (800 lumens)	27K 2700 Kelvin 50K* 5000 Kelvin	Blank 120V	Blank E26 (screw base)	Blank 80 CRI	Packaging Options T24 (24) Tray Pack bulbs in master carton (Bulk Pack) B6 (6) Blister Pack bulbs in master carton

* Not available for A19 40W equivalent.

**See compatible dimming controls page.

***Only 2700K types are ENERGY STAR qualified.

****Not for use where exposed directly to weather or water.

† See www.cree.com/lighting/products/warranty for warranty terms.



Rev. Date: 01/24/2014



A19

Product Specifications

CONSTRUCTION & MATERIALS

- A-type bulb design weighs less than 4 ounces and uses a standard E26 screw base.
- Silicon coated globe for increased safety.
- Bulb meets ANSI standards for A19 dimensions.

OPTICAL SYSTEM

- Proprietary Cree LED Filament Tower™ creates perfect omnidirectional light distribution.
- Glass globe offers increased optical spread.

ELECTRICAL SYSTEM

- **Power Factor** > 0.9 nominal
- **Input Voltage:** 120V
- **Dimming:** Dimmable to 5% with select dimmers

REGULATORY & VOLUNTARY QUALIFICATIONS

- ENERGY STAR® qualified***
- Damp rated****

A19 T24

(24) Tray Pack bulbs in master carton (Bulk Pack)



A19 B6

(6) Blister Pack bulbs in master carton



Product Number	Case UPC	Description	Bulb Type	Watts	CCT	Lamps per Pack	Pallet Qty	CRI	Lumens	Rated Life (Hrs)
A19-40W-27K-B6	10810048028129	40W Warm White A19 Equivalent	A19	6W	2700K	6	480	80	450	25,000
A19-60W-27K-B6	10810048028136	60W Warm White A19 Equivalent	A19	9.5W	2700K	6	480	80	800	25,000
A19-60W-50K-B6	10810048028143	60W Daylight A19 Equivalent	A19	9W	5000K	6	480	80	800	25,000
A19-40W-27K-T24	10810048027283	40W Warm White A19 Equivalent	A19	6W	2700K	24	1296	80	450	25,000
A19-60W-27K-T24	10810048027290	60W Warm White A19 Equivalent	A19	9.5W	2700K	24	1296	80	800	25,000
A19-60W-50K-T24	10810048027306	60W Daylight A19 Equivalent	A19	9W	5000K	24	1296	80	800	25,000

©2014 Cree, Inc. and/or one of its subsidiaries. All rights reserved. For informational purposes only. Content is subject to change. See www.cree.com/patents for patents that cover these products. Cree® and the Cree logo are registered trademarks, and Cree LED Filament Technology™ and the Quick Ship logo are trademarks of Cree, Inc. and/or one of its subsidiaries. ENERGY STAR® is a registered trademark of the U.S. Environmental Protection Agency.

