



## ProLED BR30 Series

**Halco**  
LIGHTING TECHNOLOGIES

The NEW ProLED BR30 dimmable lamp features high power LED with superior thermal construction for long life and energy efficient illumination. The new 15W lamp is rated for ICAT luminaires and provides eight times the life of Incandescent sources. The ProLED 15W BR30 is 77% more efficient than a 65W Incandescent BR30 over the life of the ProLED lamp. <sup>1</sup>

### Specifications:

- High Powered LED
- BR30 with Medium E26 base
- Acceptable for ICAT rated luminaires
- Damp location rated
- Dimmable to 5% for design flexibility
- 40,000 hour life
- Warm White, 3000K CCT
- 80+ CRI for quality and consistent color rendering
- Flood beam spread
- No Mercury or UV/IR emissions
- RoHs Compliant
- 5-Year Limited Warranty

### Markets:

- Residential
- Commercial

### Applications:

- Accent
- Display
- Education
- Healthcare
- Hospitality
- Office
- Retail

- » High Powered LED
- » Acceptable for ICAT rated luminaires
- » Dimmable to 5% for design flexibility
- » 5-Year Limited Warranty

where there's light, there's  
halco®

Contact your account representative at 800.677.3334 for pricing, orders and technical support.

Visit us at [halcolighting.com](http://halcolighting.com)

<sup>1</sup>Energy savings based on \$0.11 kWh over 40,000 hour life.

## Ordering Information

Watt	Base	Product #	Product Code	Description	Volts	Color Temp.	Lumens	CBCP	Useful Life*	Pkg. Qty.	Beam Spread	MOL
BR30												
15 Watt	Med.	80778	BR30/15WW/FL/LED	Warm White ♦	120	3000	750	-	40000	1/6	-	5.28"

### NEW ITEM!


\* Useful Life is defined as the point in time at which the lamp will maintain at least 70% of its initial lumens. The lamp will continue to burn past this point, but at decreased light levels.

Warranty - Commercial / Industrial: This product is warranted for 5 years from the date of purchase, based on 10 hours of use per day. Not for use in enclosed fixtures.

♦ For use with analog dimmers only, not for use with electronic / digital dimmers. May not be compatible with all dimming systems, dimming performance may vary by system. Use on incompatible systems may shorten lamp life. Lamps should be tested in the application for compatibility prior to full installations on circuits using such devices.

## Energy Savings Comparison

Total Lifetime Costs

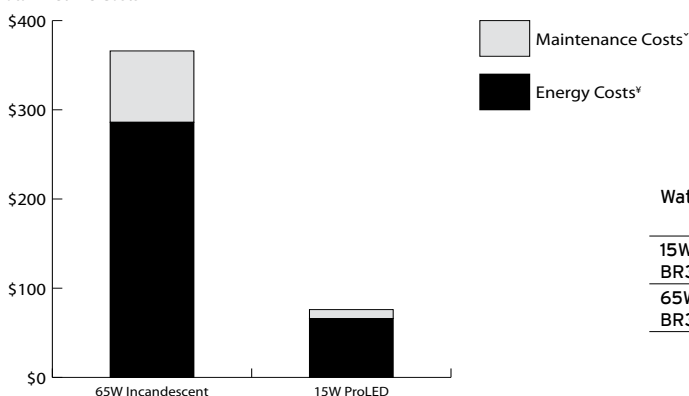

~ Maintenance costs based on 15 minutes to replace the lamp at \$40 per/hr over the life of the ProLED lamp.

¥ Energy costs based on \$0.11 kWh over 40,000 hour life.