


# SS8RG2 / IC830

8" Architectural Remodel LED Round Generation 2 / Open Reflector



|          |  |                |  |
|----------|--|----------------|--|
| JOB NAME |  | CATALOG NUMBER |  |
| NOTES    |  | TYPE           |  |

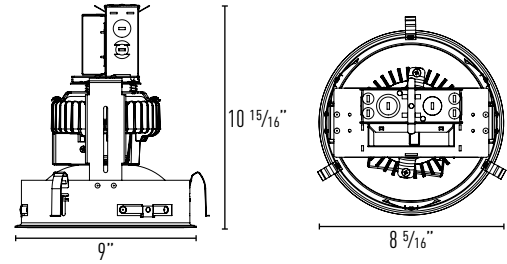

Cut-out: 8 1/8"

Order Matrix | Example: SS8RG22000308-27-EM

| A             | B                             | C | D               | E                               |
|---------------|-------------------------------|---|-----------------|---------------------------------|
| <b>A</b>      | Series                        |   | <b>D</b>        | Dimming                         |
| <b>SS8RG2</b> | 8" Remodel LED Recessed Round |   | blank           | 0-10V Dimming 10%               |
|               |                               |   | <b>-D10V1</b>   | 0-10V Dimming 1%                |
|               |                               |   | <b>-ED10V1</b>  | eldoLED 0-10V 1% <sup>1</sup>   |
|               |                               |   | <b>-ED10V01</b> | eldoLED 0-10V 0.1% <sup>1</sup> |
|               |                               |   | <b>-LUT1</b>    | Lutron Hi-Lume 1%               |
|               |                               |   | <b>-LUT</b>     | Lutron EcoSystem 1%             |
|               |                               |   | <b>-LUT5</b>    | Lutron EcoSystem 5%             |
|               |                               |   | <b>-EDALI1</b>  | eldoLED DALI 1% <sup>1</sup>    |
|               |                               |   | <b>-EDALI01</b> | eldoLED DALI 0.1% <sup>1</sup>  |
| <b>B</b>      | Module Lumen Output           |   | <b>E</b>        | Voltage                         |
| <b>1100</b>   | 1100 Lumen                    |   | blank           | 120V                            |
| <b>1500</b>   | 1500 Lumen                    |   | <b>-27</b>      | 277V                            |
| <b>2000</b>   | 2000 Lumen                    |   | <b>E</b>        | Option                          |
| <b>3000</b>   | 3000 Lumen                    |   | <b>-EM</b>      | Emergency Backup                |
| <b>C</b>      | Color Temperature / CRI       |   |                 |                                 |
| <b>278</b>    | 2700K / 80 CRI                |   |                 |                                 |
| <b>308</b>    | 3000K / 80 CRI                |   |                 |                                 |
| <b>358</b>    | 3500K / 80 CRI                |   |                 |                                 |
| <b>408</b>    | 4000K / 80 CRI                |   |                 |                                 |

Notes:

- eldoLED dimming not available for 3000lm module

Reflector Matrix | Example: IC830HZ-SF

| A            | B                 | C           |                    |
|--------------|-------------------|-------------|--------------------|
| <b>A</b>     | Series            | <b>C</b>    | Trim               |
| <b>IC830</b> | 8" Open Reflector | <b>-SF</b>  | Self Flanged       |
|              |                   | <b>-SFW</b> | Self Flanged White |
| <b>B</b>     | Reflector Finish  |             |                    |
| <b>C</b>     | Clear             |             |                    |
| <b>HZ</b>    | Haze              |             |                    |
| <b>W</b>     | White             |             |                    |

| Catalog Number                | System Wattage * | Delivered Lumens ** |
|-------------------------------|------------------|---------------------|
| <b>SS8RG21100358 / IC830C</b> | 15.73W           | 1163lm @ 3500K      |
| <b>SS8RG21500358 / IC830C</b> | 18.78W           | 1530lm @ 3500K      |
| <b>SS8RG22000358 / IC830C</b> | 24.91W           | 1959lm @ 3500K      |
| <b>SS8RG23000358 / IC830C</b> | 37.48W           | 2956lm @ 3500K      |

\* System wattage include driver and LED module consumption.

\*\* Delivered lumen output will vary depending on CCT.

### LED MODULE

- Powered by OSRAM PrevaLED® Cube LED Module
- 50,000 hours at 70% lumen maintenance
- No heat, mercury or UV
- Available in 1100, 1500, 2000 and 3000 lm
- CRI = 80 & CCT 2700K, 3000K, 3500K, 4000K

### ELECTRICAL SYSTEM

- Osram Optotronic® standard with 0-10V dimming to 10%
- Power factor >.9, 50/60Hz
- Multiple dimming options available

### OPTICAL SYSTEM

Specification grade reflector with 1.2mm thickness. Reflector available in clear specular, haze or white. Architectural, discrete polished self flange standard. Optional painted white flange is available. Meets RP-1 requirements with controlled light distribution at a 55° cut off.

### FRAME CONSTRUCTION

Heavy duty galvanized steel frame with a large access junction box. ETL listed for through wiring. LED light engine and driver are accessible from above or below ceiling.

### INSTALLATION

Three high tensions springs secure fixture into ceiling with up to 5/8" thickness.

### EMERGENCY BACKUP

Remote test switch included. Emergency driver operates LED load of up to 7.0 Watts at a nominal 450 Lumens for a minimum of 90 minutes.

### LISTING/WARRANTY

- ETL listed to US and Canadian standards for damp locations.
- 10-Year Intense LED Limited Warranty



|          |  |                |  |
|----------|--|----------------|--|
| JOB NAME |  | CATALOG NUMBER |  |
| NOTES    |  | TYPE           |  |

## SS8RG21100358 / IC830C

8" Architectural LED Round / Open Reflector

Report #: L10135705

Reflector Finish: Specular Clear

Luminaire Watts: 15.73W

Luminaire Lumens: 1162.61 lm



Lumens Per Watt: 73.91

Color Temperature: 3340K

Color Rendering Index: 84.7

Spacing Criteria: 0.86

Lighting Facts  
Reg. #: L5DN-8VRH5D



| Throw Distance (d) | 8' (2.4m)   | 10' (3m)    | 12' (3.7m)   |
|--------------------|-------------|-------------|--------------|
| Beam Diameter      | 6.9' (2.1m) | 8.5' (2.6m) | 10.3' (3.1m) |
| Illuminance (fc)   | 13.5        | 8.7         | 6            |
| Illuminance (lux)  | 146         | 93.3        | 64.8         |

### Coefficients of Utilization

Effective Floor Cavity Reflectance = .20

| RC | Wall Reflectance |     |     |     |     |     |     |     |     |    |    |    |    |    |    |
|----|------------------|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|
|    | 80               |     | 70  |     | 50  |     | 30  |     | 0   |    |    |    |    |    |    |
| RW | 70               | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30 | 10 | 50 | 30 | 10 | 0  |
| 1  | 112              | 108 | 105 | 102 | 109 | 106 | 103 | 100 | 102 | 99 | 97 | 98 | 96 | 94 | 90 |
| 2  | 104              | 98  | 92  | 88  | 102 | 96  | 91  | 87  | 92  | 88 | 85 | 89 | 86 | 83 | 79 |
| 3  | 97               | 88  | 82  | 77  | 94  | 87  | 81  | 76  | 84  | 79 | 75 | 81 | 77 | 73 | 70 |
| 4  | 90               | 80  | 73  | 67  | 88  | 79  | 72  | 67  | 77  | 71 | 66 | 74 | 69 | 65 | 63 |
| 5  | 84               | 73  | 65  | 60  | 82  | 72  | 65  | 60  | 70  | 64 | 59 | 68 | 63 | 58 | 56 |
| 6  | 78               | 67  | 59  | 54  | 76  | 66  | 59  | 54  | 64  | 58 | 53 | 63 | 57 | 53 | 51 |
| 7  | 73               | 61  | 54  | 49  | 71  | 61  | 53  | 48  | 59  | 53 | 48 | 58 | 52 | 48 | 46 |
| 8  | 69               | 57  | 49  | 44  | 67  | 56  | 49  | 44  | 55  | 48 | 44 | 54 | 48 | 44 | 42 |
| 9  | 64               | 53  | 45  | 40  | 63  | 52  | 45  | 40  | 51  | 45 | 40 | 50 | 44 | 40 | 38 |
| 10 | 61               | 49  | 42  | 37  | 60  | 48  | 42  | 37  | 48  | 41 | 37 | 47 | 41 | 37 | 35 |

### Zonal Lumens and Percentages

| Zone   | Lumens  | %Fixture |
|--------|---------|----------|
| 0-30   | 502.47  | 43.2     |
| 0-40   | 721.88  | 62.1     |
| 0-60   | 1099.85 | 94.6     |
| 0-90   | 1162.61 | 100      |
| 40-70  | 429.66  | 37       |
| 60-80  | 57.35   | 57.35    |
| 90-180 | 0       | 0        |
| 0-180  | 1162.61 | 100      |

### Zonal Lumen Summary

| Zone | CP  | Lumens |
|------|-----|--------|
| 0    | 867 | 65.42  |
| 10   | 808 | 206.12 |
| 20   | 628 | 230.93 |
| 30   | 462 | 219.41 |
| 40   | 374 | 255.22 |
| 50   | 221 | 122.75 |
| 60   | 55  | 51.69  |
| 70   | 6   | 5.66   |
| 80   | 4   | 5.41   |
| 90   | 0   | 0      |

## SS8RG21500358 / IC830C

8" Architectural LED Round / Open Reflector

Report #: L10135706

Reflector Finish: Specular Clear

Luminaire Watts: 18.78W

Luminaire Lumens: 1530.38 lm



Lumens Per Watt: 81.49

Color Temperature: 3370K

Color Rendering Index: 83.9

Spacing Criteria: 0.88

Lighting Facts  
Reg. #: L5DN-HCX7TC



| Throw Distance (d) | 8' (2.4m)   | 10' (3m)    | 12' (3.7m)   |
|--------------------|-------------|-------------|--------------|
| Beam Diameter      | 6.9' (2.1m) | 8.6' (2.6m) | 10.4' (3.2m) |
| Illuminance (fc)   | 17.6        | 11.3        | 7.8          |
| Illuminance (lux)  | 189         | 121         | 84.1         |

### Coefficients of Utilization

Effective Floor Cavity Reflectance = .20

| RC | Wall Reflectance |     |     |     |     |     |     |     |     |    |    |    |    |    |    |
|----|------------------|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|
|    | 80               |     | 70  |     | 50  |     | 30  |     | 0   |    |    |    |    |    |    |
| RW | 70               | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30 | 10 | 50 | 30 | 10 | 0  |
| 1  | 112              | 108 | 105 | 102 | 109 | 106 | 103 | 100 | 102 | 99 | 97 | 98 | 96 | 94 | 90 |
| 2  | 104              | 98  | 92  | 88  | 102 | 96  | 91  | 87  | 92  | 88 | 85 | 89 | 86 | 83 | 79 |
| 3  | 97               | 88  | 82  | 77  | 94  | 87  | 81  | 76  | 84  | 79 | 75 | 81 | 77 | 73 | 70 |
| 4  | 90               | 80  | 73  | 67  | 88  | 79  | 72  | 67  | 76  | 71 | 66 | 74 | 69 | 65 | 63 |
| 5  | 84               | 73  | 65  | 60  | 82  | 72  | 65  | 60  | 70  | 64 | 59 | 68 | 63 | 58 | 56 |
| 6  | 78               | 67  | 59  | 54  | 76  | 66  | 59  | 53  | 64  | 58 | 53 | 63 | 57 | 53 | 50 |
| 7  | 73               | 61  | 54  | 48  | 71  | 61  | 53  | 48  | 59  | 53 | 48 | 58 | 52 | 48 | 46 |
| 8  | 68               | 57  | 49  | 44  | 67  | 56  | 49  | 44  | 55  | 48 | 44 | 54 | 48 | 43 | 42 |
| 9  | 64               | 52  | 45  | 40  | 63  | 52  | 45  | 40  | 51  | 44 | 40 | 50 | 44 | 40 | 38 |
| 10 | 61               | 49  | 42  | 37  | 59  | 48  | 42  | 37  | 47  | 41 | 37 | 47 | 41 | 37 | 35 |

### Zonal Lumens and Percentages

| Zone   | Lumens  | %Fixture |
|--------|---------|----------|
| 0-30   | 656.99  | 42.9     |
| 0-40   | 945.85  | 61.8     |
| 0-60   | 1445.99 | 94.5     |
| 0-90   | 1530.38 | 100      |
| 40-70  | 570.32  | 37.3     |
| 60-80  | 77.91   | 5.1      |
| 90-180 | 0       | 0        |
| 0-180  | 1530.38 | 100      |

### Zonal Lumen Summary

| Zone | CP   | Lumens |
|------|------|--------|
| 0    | 1125 | 84.92  |
| 10   | 1051 | 268.98 |
| 20   | 824  | 303.09 |
| 30   | 608  | 288.87 |
| 40   | 493  | 336.68 |
| 50   | 294  | 163.45 |
| 60   | 74   | 70.19  |
| 70   | 8    | 7.72   |
| 80   | 5    | 6.49   |
| 90   | 0    | 0      |

All testing was conducted in accordance with LM-79-08, Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products as published by the Illuminating Engineering Society of North America (IESNA).



ARCHITECTURAL LUM-022315 P-22

Intense Lighting, LLC | 3340, E La Palma Ave. | Anaheim, CA 92806 | Phone: 1.800.961.5321 | Fax: 1.800.961.5322 | www.intenselighting.com

Note: Specifications and dimensions subject to change without notice.



|          |  |                |  |
|----------|--|----------------|--|
| JOB NAME |  | CATALOG NUMBER |  |
| NOTES    |  | TYPE           |  |

## SS8RG22000358 / IC830C

8" Architectural LED Round / Open Reflector

Report #: L10135707

Reflector Finish: Specular Clear

Luminaire Watts: 24.91W

Luminaire Lumens: 1959.31 lm



Lumens Per Watt: 78.66

Color Temperature: 3370K

Color Rendering Index: 83.9

Spacing Criteria: 0.88

Lighting Facts  
Reg. #: L5DN-XE6FIM



| Throw Distance (d) | 8' (2.4m)   | 10' (3m)    | 12' (3.7m)   |
|--------------------|-------------|-------------|--------------|
| Beam Diameter      | 6.9' (2.1m) | 8.6' (2.6m) | 10.4' (3.2m) |
| Illuminance (fc)   | 13.5        | 14.4        | 10           |
| Illuminance (lux)  | 242         | 155         | 108          |

### Coefficients of Utilization

Effective Floor Cavity Reflectance = .20

| RC | Wall Reflectance |     |     |     |     |     |     |     |     |    |    |    |    |    |    |
|----|------------------|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|
|    | 80               |     | 70  |     | 50  |     | 30  |     | 0   |    |    |    |    |    |    |
| RW | 70               | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30 | 10 | 50 | 30 | 10 | 0  |
| 1  | 112              | 108 | 105 | 102 | 109 | 106 | 103 | 100 | 102 | 99 | 97 | 98 | 96 | 94 | 90 |
| 2  | 104              | 98  | 92  | 88  | 102 | 96  | 91  | 87  | 92  | 88 | 85 | 89 | 86 | 83 | 79 |
| 3  | 97               | 88  | 82  | 76  | 94  | 87  | 81  | 76  | 84  | 79 | 75 | 81 | 77 | 73 | 70 |
| 4  | 90               | 80  | 73  | 67  | 88  | 79  | 72  | 67  | 76  | 71 | 66 | 74 | 69 | 65 | 62 |
| 5  | 84               | 73  | 65  | 60  | 82  | 72  | 65  | 59  | 70  | 64 | 59 | 68 | 63 | 58 | 56 |
| 6  | 78               | 67  | 59  | 54  | 76  | 66  | 59  | 53  | 64  | 58 | 53 | 62 | 57 | 52 | 50 |
| 7  | 73               | 61  | 54  | 48  | 71  | 60  | 53  | 48  | 59  | 53 | 48 | 58 | 52 | 48 | 46 |
| 8  | 68               | 56  | 49  | 44  | 67  | 56  | 49  | 44  | 55  | 48 | 44 | 53 | 48 | 43 | 41 |
| 9  | 64               | 52  | 45  | 40  | 63  | 52  | 45  | 40  | 51  | 44 | 40 | 50 | 44 | 40 | 38 |
| 10 | 61               | 49  | 42  | 37  | 59  | 48  | 41  | 37  | 47  | 41 | 37 | 46 | 41 | 36 | 35 |

### Zonal Lumens and Percentages

| Zone   | Lumens  | %Fixture |
|--------|---------|----------|
| 0-30   | 839.93  | 42.9     |
| 0-40   | 1208.41 | 61.7     |
| 0-60   | 1849.29 | 94.4     |
| 0-90   | 1959.31 | 100      |
| 40-70  | 731.93  | 37.4     |
| 60-80  | 100.83  | 5.1      |
| 90-180 | 0       | 0        |
| 0-180  | 1959.31 | 100      |

### Zonal Lumen Summary

| Zone | CP   | Lumens |
|------|------|--------|
| 0    | 1438 | 108.5  |
| 10   | 1342 | 343.72 |
| 20   | 1052 | 387.71 |
| 30   | 776  | 368.48 |
| 40   | 630  | 430.32 |
| 50   | 378  | 210.56 |
| 60   | 96   | 91.06  |
| 70   | 10   | 9.78   |
| 80   | 7    | 9.19   |
| 90   | 0    | 0      |

## SS8RG23000358 / IC830C

8" Architectural LED Round / Open Reflector

Report #: L10135708

Reflector Finish: Specular Clear

Luminaire Watts: 37.48W

Luminaire Lumens: 2956.45 lm



Lumens Per Watt: 78.88

Color Temperature: 3290K

Color Rendering Index: 83.3

Spacing Criteria: 0.88

Lighting Facts  
Reg. #: L5DN-LNSQJL



| Throw Distance (d) | 8' (2.4m)   | 10' (3m)    | 12' (3.7m)   |
|--------------------|-------------|-------------|--------------|
| Beam Diameter      | 6.9' (2.1m) | 8.6' (2.6m) | 10.4' (3.2m) |
| Illuminance (fc)   | 34          | 21.8        | 15.1         |
| Illuminance (lux)  | 366         | 234         | 163          |

### Coefficients of Utilization

Effective Floor Cavity Reflectance = .20

| RC | Wall Reflectance |     |     |     |     |     |     |     |     |    |    |    |    |    |    |
|----|------------------|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|----|----|----|
|    | 80               |     | 70  |     | 50  |     | 30  |     | 0   |    |    |    |    |    |    |
| RW | 70               | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30 | 10 | 50 | 30 | 10 | 0  |
| 1  | 112              | 108 | 105 | 102 | 109 | 106 | 103 | 100 | 102 | 99 | 97 | 98 | 96 | 94 | 90 |
| 2  | 104              | 98  | 92  | 88  | 101 | 96  | 91  | 87  | 92  | 88 | 85 | 89 | 86 | 83 | 79 |
| 3  | 97               | 88  | 82  | 76  | 94  | 87  | 81  | 76  | 84  | 79 | 74 | 81 | 77 | 73 | 70 |
| 4  | 90               | 80  | 73  | 67  | 88  | 79  | 72  | 67  | 76  | 71 | 66 | 74 | 69 | 65 | 62 |
| 5  | 84               | 73  | 65  | 60  | 82  | 72  | 65  | 59  | 70  | 64 | 59 | 68 | 62 | 58 | 56 |
| 6  | 78               | 67  | 59  | 53  | 76  | 66  | 58  | 53  | 64  | 58 | 53 | 62 | 57 | 52 | 50 |
| 7  | 73               | 61  | 54  | 48  | 71  | 60  | 53  | 48  | 59  | 53 | 48 | 58 | 52 | 47 | 45 |
| 8  | 68               | 56  | 49  | 44  | 67  | 56  | 49  | 44  | 55  | 48 | 44 | 53 | 48 | 43 | 41 |
| 9  | 64               | 52  | 45  | 40  | 63  | 52  | 45  | 40  | 51  | 44 | 40 | 50 | 44 | 40 | 38 |
| 10 | 61               | 49  | 42  | 37  | 59  | 48  | 41  | 37  | 47  | 41 | 37 | 46 | 41 | 37 | 35 |

### Zonal Lumens and Percentages

| Zone   | Lumens  | %Fixture |
|--------|---------|----------|
| 0-30   | 1265.67 | 42.8     |
| 0-40   | 1821.68 | 61.6     |
| 0-60   | 2787.36 | 94.3     |
| 0-90   | 2956.45 | 100      |
| 40-70  | 1106.07 | 37.4     |
| 60-80  | 155.3   | 5.3      |
| 90-180 | 0       | 0        |
| 0-180  | 2956.45 | 100      |

### Zonal Lumen Summary

| Zone | CP   | Lumens |
|------|------|--------|
| 0    | 2177 | 164    |
| 10   | 2024 | 517.13 |
| 20   | 1583 | 584.54 |
| 30   | 1171 | 556    |
| 40   | 946  | 646.48 |
| 50   | 571  | 319.2  |
| 60   | 148  | 140.38 |
| 70   | 15   | 14.92  |
| 80   | 11   | 13.79  |
| 90   | 0    | 0      |

All testing was conducted in accordance with LM-79-08, Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products as published by the Illuminating Engineering Society of North America (IESNA).



ARCHITECTURAL LUM-022315 P-33

Intense Lighting, LLC | 3340, E La Palma Ave. | Anaheim, CA 92806 | Phone: 1.800.961.5321 | Fax: 1.800.961.5322 | www.intenselighting.com  
Note: Specifications and dimensions subject to change without notice.



# DIMMING COMPATIBILITY


|          |  |                |  |
|----------|--|----------------|--|
| JOB NAME |  | CATALOG NUMBER |  |
| NOTES    |  | TYPE           |  |

## 0-10V DIMMING

- 120V or 277V
- Dims down to 1% or 10% light output
- Consult dimming manufacturer for installation instructions and power packs

## COMPATIBLE DIMMERS

| Manufacturer | Part Number(s)  |
|--------------|---|
| HUNT         | PS-010-IV-120V, PS-010-WH-120V, PS-010-3W-IV-120, PS-010-3W-WH-120V, PS-010-IV-277V, PS-010-WH-277V, PS-010-3W-IV-277V, PS-010-3W-WH-277V, FD-010: PS-IFC-010-IV, PS-IFC-010-WH-120/277V, FD-010: PS-IFC-010-3W-IV, PS-IFC-010-3W-WH-120/277V, FD-010-120V, FD-010-277V |
| Leviton      | Leviton Centura Fluorescent Control System, IllumaTech™ IP7 Series, DPSPE-212   |
| Lightolier   | ZP600FAM120, MP1500FAM120, V2000FAMU  |
| Lithonia     | LEQ BC, LEQ LVBC, SLD LVBC, SQ1DC   |
| Lutron       | DVTV, NTFTV   |
| Synergy      | ISD BC 120/277  |

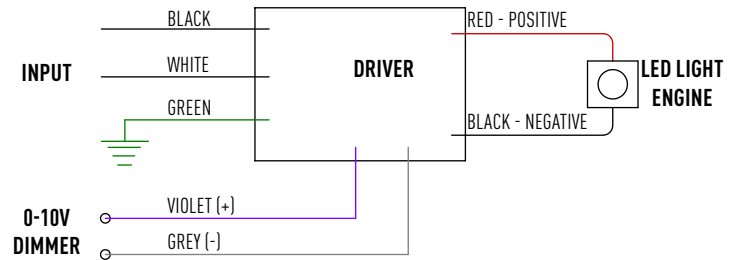


## LUTRON ECOSYSTEM® DIMMING

- 120V or 277V
- Dims down to less than 1% or 5% light output
- Consult dimming manufacturer for installation instructions

## COMPATIBLE DIMMERS

| Product   | Part Number(s)   |
|-----------|--|
| EcoSystem | CS-1L-WM, CS-2L-WM, CS-1L-CM, CS-2L-CM, EcoSystem ESN, Grafik Eye QS with EcoSystem, Quantum |

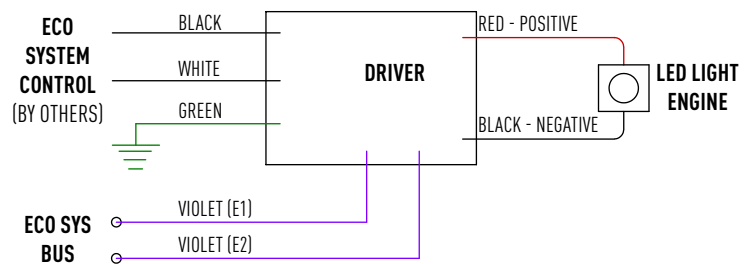

## LUTRON HI-LUME® DIMMING

- 120V or 277V
- Dims down to less than 1% light output
- Consult dimming manufacturer for installation instructions

## COMPATIBLE DIMMERS

| Product          | Part Number(s)                                    |
|------------------|---|
| NovaT            | NTF-10, NTF-103P, NTF-103P-277, NTF-10-277        |
| Nova             | NF-10, NF-103P, NF-103P-277, NF-10-277            |
| Vareo            | VF-10   |
| Skylark          | SF-10P, SF-12P-277, SF-12P-277-3, SF-103P         |
| Diva             | DVF-103, DVF-103P-277, DVSCF-103P, DVSCF-103P-277 |
| Ariadni          | AYF-103P, AYF-103P-277                            |
| Vierti           | VTF-6AM   |
| Maestro          | MAF-6AM, MAF-6AM-277, MSCF-6AM, MCSF-6AM-277      |
| Maestro Wireless | MRF2-F6AN-DV                                      |
| Spacer System    | SPSF-6A, SPSF-6A-277, SPSF-6AM, SPSF-6AM-277      |
| Lyneo            | LXF-103PL, LXF-103PL-277                          |
| Radio RA 2       | RRD-F6AN-DV                                       |
| HomeWorks QS     | HQRD-F6AN-DV                                      |

