


MX MXASTL / MXT-STLA300

MX LED Square Trimless Adjustable

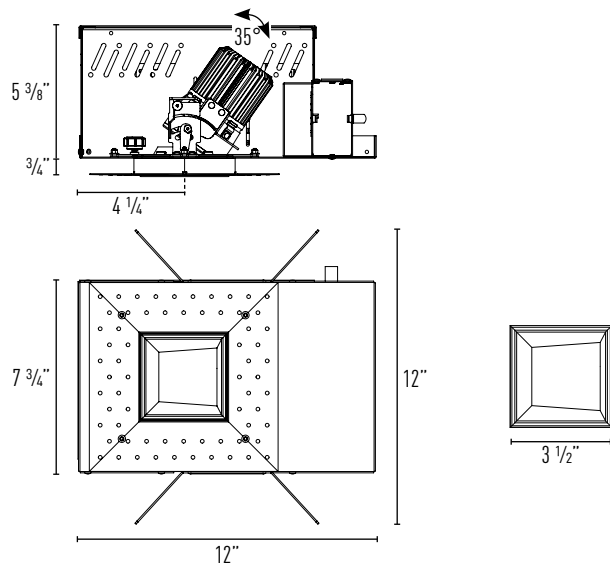

Ceiling Cut Out: 4 1/8" x 4 1/8"

Catalog Number	System Wattage ¹	CCT / CRI ²	Delivered Lumens ¹	Lumens Per Watt
MXT-STLA300BL030	10W	3000K / 82 CRI	800lm	80
MXT-STLA300BL130	15W	3000K / 82 CRI	1100lm	73

¹ System Wattage include driver and LED Module consumption.

² CCT / CRI Multipliers

2700K / 82 CRI (x0.92), 2700K / 92 CRI (x0.74), 3000K / 82 CRI (x1.0), 3000K / 92 CRI (x0.8), 3500K / 82 CRI (x1.07), 4100K / 82 CRI (x1.08), Crisp White 3000K (x0.85), Class A 3500K (x0.96)

FEATURES

- 35° Vertical and 360° Horizontal Adjustment with locking
- High center-beam spot with over 12,000 CBCP

LED LIGHT ENGINE

- 2700K, 3000K, 3500K and 4100K / 82 CRI
- Class A - 3500K, combined GAI and CRI metric
- Crisp White - 3000K, vibrant whites and naturally saturated, warm colors
- 2700K and 3000K / 92 CRI (R9 Value = 59)
- 2 Step MacAdam (2 SDMC)
- LED mounted to die-cast / extruded aluminum heat sink
- 50,000 hours average rated life at 70% output

ELECTRICAL SYSTEM

- Power factor >.9, 50/60Hz
- Multiple dimming drivers available
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

HOUSING

Heavy duty black powder coated 18 gauge steel frame. Standard plaster frame accommodates 5/8" ceiling thickness, consult factory for thicker ceilings.

TRIM SPECIFICATION

High quality trims are die-cast using A380 aluminum and finished with durable powder coat available in black or white. Perforated mesh frame is die-cast to a 0.8mm thickness to easily adhere to joint compound for seamless and trimless mounting.

INSTALLATION

Housing types include IC Air-Tight, CCEA (Chicago Plenum), or Non-IC Rated (must specify). Non-IC rated housings must be kept at a minimum of 3" away from insulation. Butterfly brackets and adjustable hanger bars (14"-25") with integral nail included. Butterfly brackets are compatible with flat bar hanger and EMT. Bar hangers must be ordered separately. Max. ambient temperature: 131°F (55°C).


EMERGENCY BACKUP

Remote test switch included. Emergency driver operates LED load of up to 7.0 Watts at a nominal 450 lumens for a minimum of 90 minutes.

LISTING / WARRANTY

- 10 Year Intense LED Limited Warranty
- ETL listed to US and Canadian standards for damp locations
- (-AIC Only) Air Tight Certified ASTM E283
- (-AIC Only) ETL listed for direct contact w/ insulation
- (-CP Only) CCEA Chicago Plenum

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

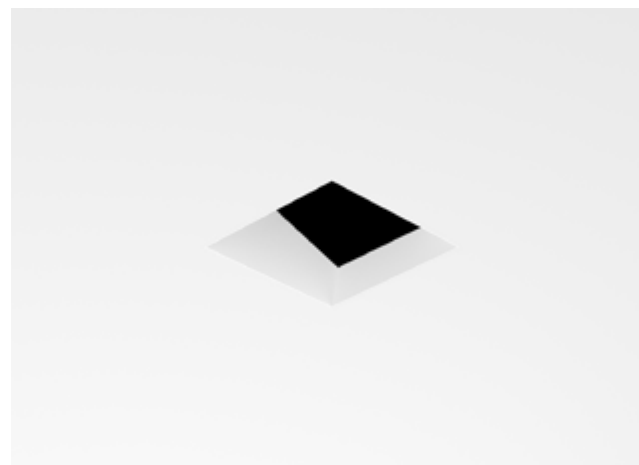

Trim Specification:

Example: MXT-STLA300WL13012

SERIES	MXT-STLA300
Square Trimless Accent	
REFLECTOR FINISH	
Black	B¹
White	W¹
WATTAGE	
10 Watts	L0
15 Watts	L1
CCT / CRI	
2700K / 82 CRI	27
2700K / 92 CRI	279
3000K / 82 CRI	30
3000K / 92 CRI	309
3500K / 82 CRI	35
4100K / 82 CRI	41
Class A 3500K	CA35
Crisp White 3000K	CW30
OPTIC	
12° Spot	12
24° Narrow Flood	24
36° Flood	36
50° Wide Flood	50

Accessories:

Luminaire will accommodate a maximum of (2) accessories, accessory holder required

ACCESSORY HOLDER	
Accessory Holder, Black	LH47
Accessory Holder, White	LH47W

FILTER MEDIA	
Prismatic Spread Lens	PFL1-47
Linear Spread Lens	PFL2-47
Solite Soft Focus	PFL4-47
Black Hex Louver	PFLMB-47

Housing Specification:

Example: MXASTL-ICL1

SERIES	MXASTL-NC
Non-IC LED	
Air Tight IC LED	MXASTL-IC
CCEA LED	MXASTL-CP
WATTAGE	
10 Watts	L0
15 Watts	L1
DIMMING	
Non-Dimming	blank
ELV Dimming	DELV²
0-10V Dimming 10%	D10
eldoLED 0-10V 1%	ED10V1
eldoLED 0-10V 0.1%	ED10V01
Lutron Hi-Lume® 1%	LUT1
Lutron EcoSystem® 1%	LUT
eldoLED DALI 1%	EDALI1
eldoLED DALI 0.1%	EDALI01
VOLTAGE	
120V	blank
277V	27
ACCESSORIES	
Emergency Backup	-EM³
Flat Bar Hangers	-I200
Wood Joist Bar Hangers	-I400

Notes:

1. Special order finishes available, consult factory
2. Available in 120V only
3. Access above ceiling required



JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

MXASTLLO / MXT-STLA300BLO


Report #: L041500709 (12)
L051500711 (24)
L051500713 (36)

CCT / CRI Multipliers:

2700K / 82 CRI (x 0.92)
2700K / 92 CRI (x 0.74)
3000K / 82 CRI (x 1.00)
3000K / 92 CRI (x 0.8)
3500K / 82 CRI (x 1.07)
4100K / 82 CRI (x 1.08)

Crisp White 3000K / 90 CRI (x0.85)*
Class A 3500K / 90 CRI (x0.96)*


* Lumens only, see IES file for candelas



Watts: 10.7
Lumens: 696
LPW: 65
CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	9398
5°	6179
15°	476
25°	87
35°	30
45°	5



Watts: 10.7
Lumens: 789
LPW: 74
CCT: 3000K

Candelas at Nadir

Degree	Candela
0°	4417
5°	3928
15°	1253
25°	152
35°	21
45°	4



Watts: 10.7
Lumens: 845
LPW: 79
CCT: 3000K

Candelas at Nadir




Degree	Candela
0°	2036
5°	1965
15°	1316
25°	460
35°	103
45°	13

APPLICATION DATA:

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

W Beam width
L Beam length
C Distance to center of beam
D Distance
FC Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL					35° VERTICAL				
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
MXASTLLO / MXT-STLA300BLO 3000K 12° Spot	6'	261	1.4	1.4	6'	4	146	1.94	1.55	3'	4	281	1.16	2
	8'	147	1.8	1.8	8'	5	77.1	2.72	2.2	4'	6	146	1.56	2.82
	10'	94	2.3	2.3	10'	7	51.7	3.3	2.83	5'	7	103	1.91	3.26
	12'	65.3	2.7	2.7	12'	8	36.4	3.92	3.3	6'	8	70.1	2.38	4
MXASTLLO / MXT-STLA300BLO 3000K 24° Narrow Flood	6'	123	2.4	2.4	6'	4	70.1	3.29	2.85	3'	4	139	1.87	3.19
	8'	69	3.2	3.2	8'	5	40.5	4.27	3.59	4'	5	78.9	2.59	4.16
	10'	44.2	4	4	10'	6	25.7	5.4	4.54	5'	6	49.9	3.25	5.22
	12'	30.7	4.9	4.9	12'	7	17.8	6.48	5.48	6'	8	34.7	3.82	6.24
MXASTLLO / MXT-STLA300BLO 3000K 36° Flood	6'	56.6	3.9	3.9	6'	3	36.3	4.43	3.99	3'	3	68.1	2.96	4.12
	8'	31.8	5.2	5.2	8'	4	20.4	5.91	5.4	4'	4	38.3	3.8	5.56
	10'	20.4	6.5	6.5	10'	5	13.1	7.37	6.73	5'	6	24.8	4.84	6.83
	12'	14.1	7.8	7.8	12'	6	9.1	8.82	8	6'	7	17.4	5.7	8.1



JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

MXASTLL1 / MXT-STLA300BL1

Report #: L041500709 (12)
L051500711 (24)
L051500713 (36)


CCT / CRI Multipliers:

2700K / 82 CRI (x 0.92)
2700K / 92 CRI (x 0.74)
3000K / 82 CRI (x 1.00)
3000K / 92 CRI (x 0.8)
3500K / 82 CRI (x 1.07)
4100K / 82 CRI (x 1.08)

Crisp White 3000K / 90 CRI (x0.85)*

Class A 3500K / 90 CRI (x0.96)*


* Lumens only, see IES file for candelas



Watts: 15.2
Lumens: 980
LPW: 65
CCT: 3000K

Candelas at Nadir


Degree	Candela
0°	13236
5°	8703
15°	671
25°	122
35°	42
45°	8



Watts: 15.1
Lumens: 1112
LPW: 73
CCT: 3000K

Candelas at Nadir

Degree	Candela
0°	6221
5°	5533
15°	1765
25°	214
35°	30
45°	6



Watts: 15.2
Lumens: 1191
LPW: 78
CCT: 3000K

Candelas at Nadir




Degree	Candela
0°	2868
5°	2768
15°	1853
25°	648
35°	146
45°	19

APPLICATION DATA:

W and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

W Beam width
L Beam length
C Distance to center of beam
D Distance
FC Footcandles

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.



	0° HORIZONTAL				35° HORIZONTAL					35° VERTICAL				
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
MXASTLL1 / MXT-STLA300BL1 3000K 12° Spot	6'	368	1.4	1.4	6'	4	205	1.94	1.55	3'	4	395	1.16	2
	8'	207	1.8	1.8	8'	5	109	2.72	2.2	4'	6	205	1.56	2.82
	10'	132	2.3	2.3	10'	7	72.8	3.3	2.83	5'	7	145	1.91	3.26
	12'	91.9	2.7	2.7	12'	8	51.3	3.92	3.3	6'	8	98.8	2.38	4
MXASTLL1 / MXT-STLA300BL1 3000K 24° Narrow Flood	6'	173	2.4	2.4	6'	4	98.8	3.29	2.85	3'	4	196	1.87	3.19
	8'	97.2	3.2	3.2	8'	5	57	4.27	3.59	4'	5	111	2.59	4.16
	10'	62.2	4	4	10'	6	36.3	5.4	4.54	5'	6	70.2	3.25	5.22
	12'	43.2	4.9	4.9	12'	7	25	6.48	5.48	6'	8	48.9	3.82	6.24
MXASTLL1 / MXT-STLA300BL1 3000K 36° Flood	6'	79.7	3.9	3.9	6'	3	51.1	4.43	3.99	3'	3	95.9	2.96	4.12
	8'	44.8	5.2	5.2	8'	4	28.7	5.91	5.4	4'	4	53.9	3.8	5.56
	10'	28.7	6.5	6.5	10'	5	18.4	7.37	6.73	5'	6	34.9	4.84	6.83
	12'	19.9	7.8	7.8	12'	6	12.8	8.82	8	6'	7	24.5	5.7	8.1

DIMMING COMPATIBILITY


JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

0-10V DIMMING (10% Dimming, eldoLED 1%, eldoLED 0.1%)

- 120V/277V
- Dims down to 10% light output
- Consult dimming manufacturer for installation instructions and power packs

COMPATIBLE DIMMERS

Manufacturer	Part Number(s)
HUNT	PS-010-IV-120V, PS-010-WH-120V, PS-010-3W-IV-120, PS-010-3W-WH-120V, PS-010-IV-277V, PS-010-WH-277V, PS-010-3W-IV-277V, PS-010-3W-WH-277V, FD-010: PS-IFC-010-IV, PS-IFC-010-WH-120/277V, FD-010: PS-IFC-010-3W-IV, PS-IFC-010-3W-WH-120/277V, FD-010-120V, FD-010-277V
Leviton	Leviton Centura Fluorescent Control System, IllumaTech™ IP7 Series, DPSPE-212
Lightolier	ZP600FAM120, MP1500FAM120, V2000FAMU
Lithonia	LEQ BC, LEQ LVBC, SLD LVBC, SQ1DC
Lutron	DVTV, NTFTV
Synergy	ISD BC 120/277

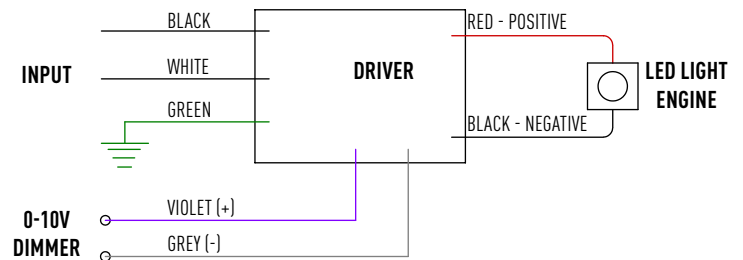


LUTRON ECOSYSTEM® DIMMING

- 120V or 277V
- Dims down to less than 1% or 5% light output
- Consult dimming manufacturer for installation instructions

COMPATIBLE DIMMERS

Product	Part Number(s)
EcoSystem	CS-1L-WM, CS-2L-WM, CS-1L-CM, CS-2L-CM, EcoSystem ESN, Grafik Eye QS with EcoSystem, Quantum

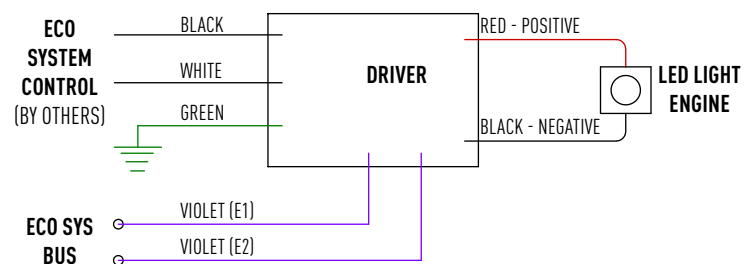

LUTRON HI-LUME® DIMMING

- 120V or 277V
- Dims down to less than 1% light output
- Consult dimming manufacturer for installation instructions

COMPATIBLE DIMMERS

Product	Part Number(s)
NovaT	NTF-10, NTF-103P, NTF-103P-277, NTF-10-277
Nova	NF-10, NF-103P, NF-103P-277, NF-10-277
Vareo	VF-10
Skylark	SF-10P, SF-12P-277, SF-12P-277-3, SF-103P
Diva	DVF-103, DVF-103P-277, DVSCF-103P, DVSCF-103P-277
Ariadni	AYF-103P, AYF-103P-277
Vierti	VTF-6AM
Maestro	MAF-6AM, MAF-6AM-277, MSCF-6AM, MCSF-6AM-277
Maestro Wireless	MRF2-F6AN-DV
Spacer System	SPSF-6A, SPSF-6A-277, SPSF-6AM, SPSF-6AM-277
Lyneo	LXF-103PL, LXF-103PL-277
Radio RA 2	RRD-F6AN-DV
HomeWorks QS	HQRD-F6AN-DV

