

# LINIARC® HORIZON

# HRZ

- **PRODUCT HIGHLIGHTS**
- **Wide Variety of Lamp Options** - Horizon is available with a choice of one to three T8, T5, or T5HO lamps.
- **Multiple Shielding Options** - Louvers are available in semi-specular aluminum parabolic or white flat steel blades (either solid or perforated). A frosted acrylic lens is also available.
- **4-Foot Incremental On-Grid Mounting**- Fixtures are available in 4 and 8 foot lengths to match handling capabilities on job site. 4-foot increments allow the fixtures to be mounted on standard ceiling grids, no matter how long the row.
- **Easy Cable Attachment** - No locking plugs are needed with LiniArc fixtures. Hanging connections are secured by the end cap or the adjoining fixture.
- **Less Installation Labor** - Fixtures come with the connecting hardware pre-installed. Keyhole slots capture the joining screws and hold the fixture while the screw are tightened.
- **Easy Two-Way Adjustment** - Finger-action cable grippers on yoke mount allows simple height and side-to-side adjustment and lock in place with a set screw. This allows the hangers to be pre-set to length on the ground prior to hanging the fixture.



**HOUSING** - Die-formed 20-gauge steel. Textured white polyester white powder coat finish

**REFLECTOR** - Die formed steel, high-reflectance white polyester powder coat standard. Optional high-performance specular aluminum reflector available.

**LENS** - Frosted acrylic lens available.

**BALLASTS** - Solid-state electronic. Universal voltage (120-277). Dimming also available.

**PHOTOMETRICS** - Please visit our web site at [www.lsi-industries.com](http://www.lsi-industries.com) for detailed photometric data.


**LISTING** - UL listed to U.S. and Canadian safety standards. Suitable for damp location.

**ACCESSORIES** - See Accessories page for End Cap, Hanging and Feed Options




## DIMENSIONS


**FL - Frosted Acrylic Lens**

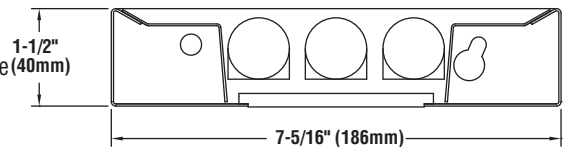

**PL - Parabolic Louver**

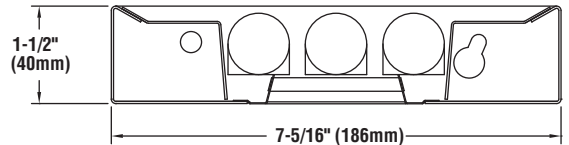

**RPL - Recessed Parabolic Louver**

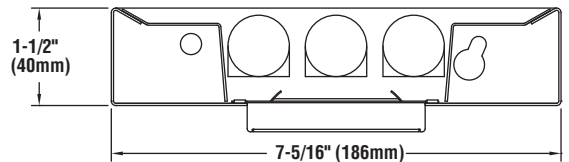

## LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **HRZ 8 PL 2 54 SS5HO D EF EM11 UE**

SHOP NOW >

Prefix	Length	Shielding	Lamps	Type	Ballasts	Circuiting	Emer Circuiting	Options	Voltage
HRZ - Horizon	4 8	PL-Parabolic Louver (Standard) RPL-Recessed Parabolic Louver FL-Frosted Acrylic Lens	1	32 - T8	SS5R - T5 Programmed Start	S-Single D-Double	Blank - None EF - Separate Individual Emergency Feed EH - Dedicated Emergency Thru-Wire Harness ES - Emergency Feed Through Main Single Circuit Harness	RAL - Custom Color (Specify - ex. RAL829) EC - Emergency Circuit Feed EM5 - Emerg. Battery (500 Lumen) EM11 - Emerg. Battery (1100 Lumen) EN5 - Batt. Pk/NiteLite (500 Lumen) EN11 - Batt. Pk/NiteLite (1100 Lumen) F - Fuse GMF - Slow-blow Fuse HPR - High Performance Specular Reflector <sup>1</sup> LM - Lamps Installed (Specify - ex. LM735) DC - Dust Cover OL - White Acrylic Overlay <sup>1</sup> CEE - CEE Approved Components installed	UE - Universal Electronic (120-277V) 120 - 120V 277 - 277V 347 - 347V
			2	28 - T5	SS5D - T5 Dimming (specify type)				
			3	54 - T5HO	SS5HO - T5HO Programmed Start SS5HOD - T5HO Dimming (specify type) SSO - T8 Instant Start (<10% THD Standard) SSOR - T8 Programmed Start SSOD - T8 Dimming SSOHL - T8 High Output				

1 - White Acrylic Overlay Standard With T5HO Lamping



Project Name \_\_\_\_\_ Fixture Type \_\_\_\_\_  
 Catalog # \_\_\_\_\_