


LINIARC® PARTIAL PERF HOUSING (LAP LED)

SHOP NOW >



DIMENSIONS

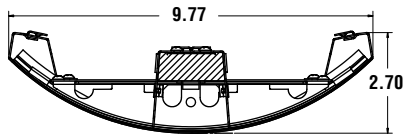

PRODUCT HIGHLIGHTS

- **LEDs** - Use of closely-spaced medium power, high-brightness chips minimizes pixilation and provides uniform luminance. Available in 4000K, 3500K and 3000K color temperatures. CRI >=80. LM-80 reports available.
- **3 End Cap Choices for 3 Different Looks** - Choose between two optional cast end caps for an ultra-thin sculpted or more substantial bull-nose look. Stamped flat end cap is standard.
- **Multiple Hanging Options** - Choose between stem or aircraft cable mounting. Cable mounting available with single-point or yoke mount and adjustable or fixed lengths.
- **4-Foot Incremental On-Grid Mounting** - Fixtures are available in 4, 8 and 12 foot lengths to match handling capabilities on job site. 4-foot increments allow the fixtures to be mounted on standard ceiling grids, no matter how long the row.
- **Easy Cable Attachment** - No locking plugs are needed with LiniArc fixtures. Hanging connections are secured by the end cap or the adjoining fixture.
- **Less Installation Labor** - Fixtures come with the connecting hardware pre-installed. Keyhole slots capture the joining screws and hold the fixture while the screws are tightened.
- **Easy Two-Way Adjustment** - Finger-action cable grippers on yoke mount allows simple height and side-to-side adjustment, and lock in place with a set screw. This allows the hangers to be pre-set to length on the ground prior to hanging the fixture.

HOUSING - Die Formed 20-gauge steel. Textured white polyester powder coat finish

REFLECTOR - Die formed steel, high-reflectance white polyester powder coat finish.

DIFFUSER - White Acrylic Overlay

DRIVER - 0-10V dimming driver standard. SS and HO outputs dim to 1%. VHO output dims to 10%. Universal voltage (120-277 VAC), 347 VAC.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

LISTING - U.L. listed to U.S. and Canadian safety standards.

This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



ACCESSORIES - See Accessories page for End Cap, Hanging and Feed Options

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LAP 8 LED HO NW S EF WHT UE**

Prefix	Length	Light Source	Drive Current	Color Temp	Circuiting	Emer Circuiting	Finish	Options	Line Voltage
LAP - Partial Perf Housing	4 - 4 foot 8 - 8 foot 12 - 12 foot	LED	SS - Super Saver HO - High Output VHO - Very High Output	30- 3000K 35 - 3500K 40 - 4000K	S-Single	Blank - None EF - Separate Individual Emergency Feed EH - Dedicated Emergency Thru-Wire Harness ES - Emergency Feed Through Main Single Circuit Harness	WHT - White BLK - Black SLV - Silver	RAL - Custom Color (Specify - ex. RAL829) EC - Emergency Circuit Feed F - Fuse GMF - Slow-blow Fuse EM - Emergency Battery Pack LDE1 - Lutron EcoSystem Series H (1% dimming) OCS - Occupancy Sensor DHS - Daylight Harvesting Sensor	UE- Universal Voltage (120-277V) 347 - 347V



Project Name _____ Fixture Type _____
Catalog # _____

03/17/16
© 2016
LSI INDUSTRIES INC.