


Nenúfar

Joan Gaspar

marset



Nenúfar 3

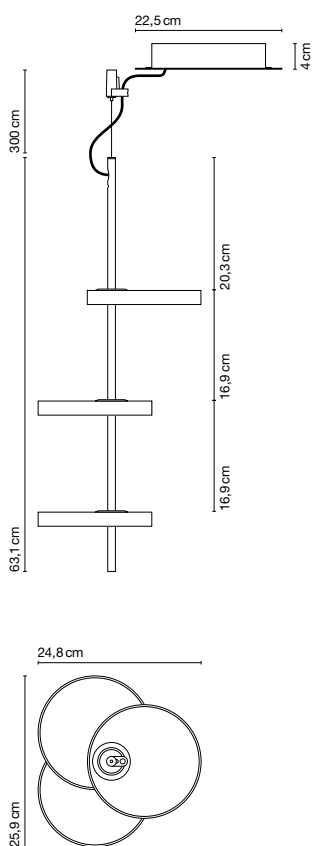

A chromed metal stem supports a system of one, two, or three polycarbonate discs, attached at varying heights and with 120 degrees of separation between. A diffuser with a strip of perimeter LEDs projects the light downwards.

Nenúfar 3

Light source:
LED SMD 24Vdc 27W 2700K CRI90 3150lm

Luminaire:
(Power supply not included) 611lm

LED included

*3000K on request

● Black




- [Download](#) Assembly Instructions
- [Download](#) Photometric Data
- [Download](#) 2D
- [Download](#) 3D


For mounted canopy installation

When the project requires a combination of different Nenúfars, you will have to take into account the total power in watts, the power of the driver, and the wire entry points of the canopy. The total wattage of the selected Nenúfar elements cannot exceed the max wattage of the canopy's driver. Therefore, you must choose your canopy/driver by the power required. Finally, the number of Nenúfars installed in a single canopy cannot exceed the number of wire entry points of that canopy.


30W Canopy




75W Dali Canopy




60W Canopy



100W Canopy



100W 1-10V Canopy



Power

Nenúfar 3 27W

Wire entry points

30W Canopy 3

Luminaire: 90 - 264 VAC 30W (max.)

60W Canopy 4

Luminaire: 180 - 295 VAC 60W (max.)

Luminaire: 220 - 240 VAC DALI 60W (max.)

75W / 100W Canopy 5

Luminaire: 90 - 264 VAC 100W (max.)

Luminaire: 220 - 240 VAC TRIAC 100W (max.)

Luminaire: 220 - 240 VAC DALI 100W (max.)

Luminaire: 220 - 240 VAC 0-10V 100W (max.)

The Nenúfar system allows one to regulate the light (1-10v or DALI)

For recessed canopy installation

The ceiling plate accessory is a technical solution that allows you to hide the driver in a false ceiling. Every Nenúfar will require a ceiling plate. For any installation where the driver must be hidden, there are 4 types of drivers based on the power: 20-30-60-100W.

Ceiling plate

Ø 12 cm



Black or white electrical cord, depending on the color of the model




A fixture that seems to float on air, the Nenúfar takes its name and its delicate shape from the water lily.


Nenúfar Pre-sets

The Nenúfar system comes in groups of 3, 5 or 9 units to ease installation.


Pre-set 3A

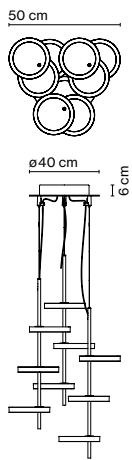

Pre-set 5A

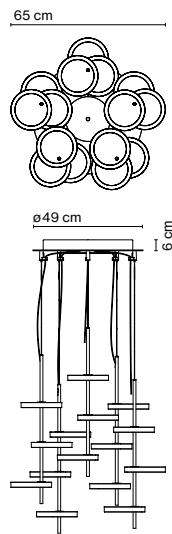

Pre-set 9A

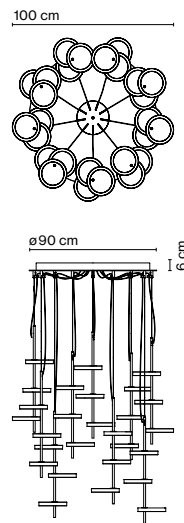

Nenúfar Pre-set 3A

3 x Nenúfar 3 + Canopy (100W)
(driver incl.)

Light source:

LED SMD 24Vdc 27W (x3) 2700K CRI90
3150lm (x3)

Luminaire:

90 - 264 VAC 80W 611lm (x3)
220 - 240 VAC DALI 76W 611lm (x3)
220 - 240 VAC 0-10V 79W 611lm (x3)

Nenúfar Pre-set 5A

5 x Nenúfar 3 + Canopy (160W)
(driver incl.)

Light source:

LED SMD 24Vdc 27W (x5) 2700K CRI90
3150lm (x5)

Luminaire:

180 - 264 VAC 134W 611lm (x5)
220 - 240 VAC DALI 611lm (x5)
220 - 240 VAC 0-10V 611lm (x5)

Nenúfar Pre-set 9A

9 x Nenúfar 3 + Canopy (300W)
(driver incl.)

Light source:

LED SMD 24Vdc 27W (x9) 2700K CRI90
3150lm (x9)

Luminaire:

90 - 264 VAC 213W 611lm (x9)
220 - 240 VAC DALI 240W 611lm (x9)
220 - 240 VAC 0-10V 213W 611lm (x9)

LED included

● Black

