


# WPLED26N

26 Watt LED Wallpack. Equivalent to 175W MH Wallpack. Includes both junction box and surface mount for recessed box. IESNA Full Cutoff, Fully Shielded optics. 5 Year warranty.

Color: Bronze

Weight: 7.5 lbs

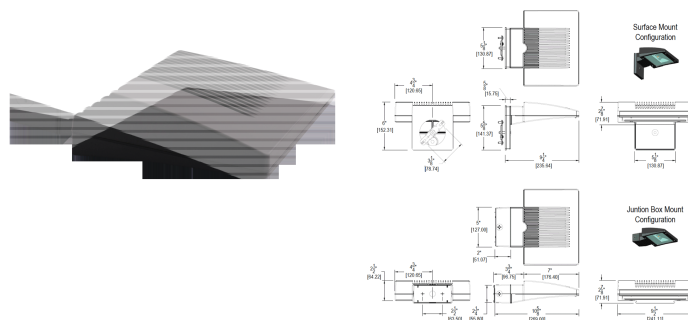

## LED Info

Watts: 26  
 Color Temp: 4000K (Neutral)  
 Color Accuracy: 88  
 L70 Lifespan: 0  
 LM79 Lumens: 1,336  
 Efficacy: 45 LPW

## Driver Info

Type: Constant Current  
 120V: 0.26 A  
 208V: 0.16 A  
 240V: 0.14 A  
 277V: 0.12 A  
 Input Watts: 30W  
 Efficiency: 87%

## Technical Specifications

### UL Listing:

Suitable for wet locations. Suitable for mounting within 4' of the ground.

### Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by IBEW Local 3

### Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010)

### Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

### GSA Schedule:

This product is suitable for listing on the GSA Schedule of the US General Services in accordance with FAR Subpart 25.4

### Finish:

Chip and fade resistant polyester powder coat finish.

### Color Stability:

RAB LEDs exceed industry standards for chromatic stability.

### Color Uniformity:

RAB's range of CCT (Correlated color temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2008.

### Ambient Temperature:

Suitable for use in 40C ambient temperatures.

### Fixture Efficacy:

44 Lumens per Watt

### Color Accuracy:

88 CRI

### Color Temperature (Nominal CCT):

4000K

### LED Light Engine:

Multi-chip 26W high output long life LED Driver  
 Constant Current, 720mA, Class 2, 6 KV Surge Protection, 100V-277V, 50-60 Hz, 100-240V .4 Amps

### Cold Weather Starting:

The minimum starting temperature is -40F/-40C

### Heatsink:

Cast aluminum thermal management system for optimal heat sinking. The LPACK is designed for cool operation, most efficient output and maximum LED life by minimizing LED junction temperature.

### California Title 24:

WPLED complies with California Title 24 building and electrical codes.

### Equivalency:

The WPLED26 is Equivalent in delivered lumens to a 175W Metal Halide Wallpack.

### HID Replacement Range:

The WPLED26 can be used to replace 150 - 200W Metal Halide Wallpacks based on delivered lumens.

### Green Technology:

RAB LEDs are Mercury, Arsenic and UV free.



WPLED26N - continued

**Patents:**

The WPLED design is protected by U.S. PATENT D608,040 and patents pending in the U.S., Canada, China, Taiwan and Mexico.

**For use on LEED Buildings:**

IDA Dark Sky Approval means that this fixture can be used to achieve LEED Credits for Light Pollution Reduction.

**Dark Sky Approved:**

The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

