



JOB INFORMATION

TYPE: _____

CATALOG NO. _____

PROJECT NAME: _____


COMMENTS: _____

PREPARED BY: _____

T1014LED

SONOMA I

DIMENSION

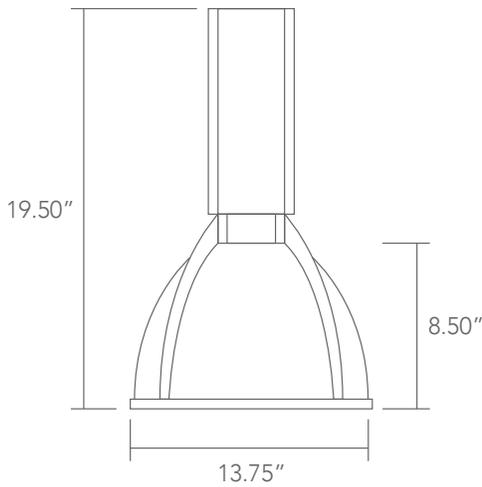

FEATURES

USE OF PRODUCT

The intended use of this product is in showroom, restaurant, lobby, retail, or any interior commercial space.

HOUSING

Rugged die cast aluminum housing and extrusion aluminum.

FINISH

Matt-finished, architectural powdercoat over a precise chromate conversion coating. Consult factory for made to order architectural finishes.

OPTICS

- Available in prismatic acrylic and aluminum reflector.
- Diffused or clear glass lens available upon request.

LED

High output LEDs offer a minimum estimated operating life of 50,000 hours in 2700K, 3000K, 3500K, 4000K, or 5000K (standard) with CRI>83. LEDs placed on high performance aluminum heatsink for reduced junction temperatures and extended life.

DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz. Driver provides dual dimming: Triac (forward-phase or leading-edge)/ELV (reverse-phase or trailing-edge) and 0-10V Dimming Constant Current. Driver protections includes: Output open load, over-current and short-circuit, and over-temperature with auto recovery. Step down transformer may be utilized for 480V or 347V applications.

MOUNTING

Available in pendant hung, single cable, or double cable.

LISTINGS/COMPLIANCE

- ETL listed or UL/UCL US

ACCESSORIES

Consult Factory.



HEIGHT: 19.50" | DIAMETER: 13.75" | REFLECTOR HEIGHT: 8.50"

ORDERING INFORMATION

T1014LED [] [] [] [] [] [] [] [] [] []

SERIES	WATTS/LUMENS	VOLTAGE	COLOR TEMP	HOUSING FINISH	REFLECTOR	REFLECTOR FINISH	MOUNTING	OPTIONS
T-SERIES	18 - 18W/1890L	UNI12 - 120V-277V	27 - 2700K	² GY - Gray	AL - Aluminum	ST - Standard	⁴ SM - 18" Stem Mount	DIM - Dimmable
LED	30 - 30W/3150L	347 - 347V	30 - 3000K	³ MTO - Made to Order	PA - Prismatic Acrylic	MTO - Made to Order	⁵ SC - Single Cable	SDT - Step Down Transformer
	45 - 45W/4725L	480 - 480V	35 - 3500K				DC - Double Cable	EM - Emergency Battery pack
	57 - 57W/5985L		40 - 4000K					WC - Wireless Control
			¹ 50 - 5000K					PDL - Partially diffused outer diameter lens
								FDL - Fully diffused lens

¹ Standard color temperature
² Standard finish
³ RAL Number Required
⁴ 18" standard length, consult factory for other
⁵ Standard cable length 5ft.

