



All LED Emergency Exit Combo Specification

All LED Combo

120 or 277 Voltage, Damp Location

Features and Benefits:

Features

- Unique, design combines an energy-efficient LED EXIT sign with an LED emergency light into one low-profile unit.
- Wattage per face: 1.5W.
- EZ snap-out field selectable Chevron directional indicators.

Illumination

- Ultra-bright, energy efficient white LED emergency lighting.
- High-performance smooth chrome-plated metallized reflector and polycarbonate "light pipe" lens for optimal light distribution and resistance to discoloration.
- Adjustable light pipe allows for optimal use of light output.
- Long-lasting, energy efficient Red or Green LED exit sign.

Electrical

- Dual 120V/277V. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED Board/light pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Mounting

- EZ-snap thermoplastic mounting canopy included – provides top, end or back mount

Housing

- Injection-molded, engineering-grade, V-0 flame retardant, high-impact, thermoplastic in white or black.

Warranty/Listing

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL listed for damp locations. (0°-50°C/32°-122°F standard)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.


Catalog Number

Notes

Type



Dimensions:

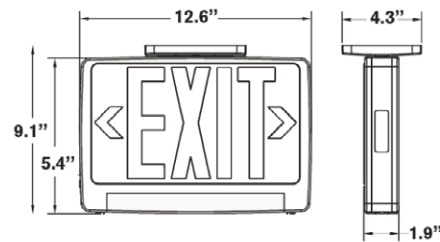

Warranties & Compliances:	Item #	Description	Letter Color	Housing Color	BBUP	TCP Traditional Equivalents	
 Battery Pro-Rated 5 YEAR WARRANTY Electronics/Housing 5 YEAR WARRANTY	Ordering Information:						
	ALL LED EMERGENCY EXIT COMBO – WHITE HOUSING						
		LEDPCUFRWRC	Universal Face, Red, White Housing, Remote Capable	Red	White	Y	20784
		LEDPCUFGWRC	Universal Face, Green, White Housing, Remote Capable	Green	White	Y	20785
		LEDPCUFRWRCSDT	Universal Face, Red, White Housing, Remote Capable, SDT	Red	White	Y	20784SD
		LEDPCUFGWRCSDT	Universal Face, Green, White Housing, Remote Capable, SDT	Green	White	Y	20785SD
		LED REMOTE HEADS – WHITE HOUSING					
		LEDRH1	LED Combo Remote Head Single, Self Diagnostic Test		White		207R1
		LEDRH2	LED Combo Remote Head Double, Self Diagnostic Test		White		207R2
		LEDRH1WLSDT	LED Combo Remote Head Single, Wet Location, SDT		White		
		LEDRH2WLSDT	LED Combo Remote Head Double, Wet Location, SDT		White		
		ALL LED EMERGENCY EXIT COMBO – BLACK HOUSING					
		LEDPCUFRWRCB	Universal Face, Red, Black Housing, Remote Capable	Red	Black	Y	20762,20763D
		LEDPCUFGWRCB	Universal Face, Green, Black Housing, Remote Capable	Green	Black	Y	
		LED REMOTE HEADS – BLACK HOUSING					
		LEDRH1B	LED Combo Remote Head Single, Self Diagnostic Test		Black		
		LEDRH2B	LED Combo Remote Head Double, Self Diagnostic Test		Black		
		LEDRH1WLSDTB	LED Combo Remote Head Single, Wet Location, SDT		Black		
		LEDRH2WLSDTB	LED Combo Remote Head Double, Wet Location, SDT		Black		

