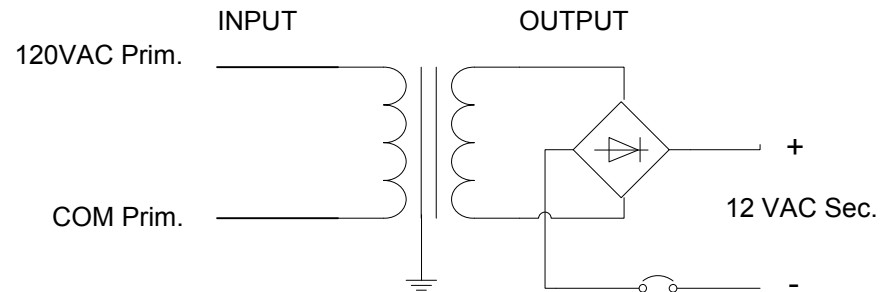


**NOTES:**

1. Output voltage in table 1 with 120VAC applied and fully loaded.
2. Maximum no load input current : 0.05A
3. Enclosure Temperature does not exceed 55°C in a 40°C ambient, fully loaded.
4. The actual transformer 5VA is encapsulated in the enclosure.
5. The transformer is dimmable with all dimmers that provide symmetrical form of the current under any condition.
6. Input and output terminal block UL rated 300V 20 Amps. 20-12 AWG
7. The transformer uses a class B (130°C) insulation system.
8. Wiring compartment has 2 side knockouts sized for 3/4 inch screw cable connectors.
9. The removable wiring compartment is secured in place by clips and one screw.
10. The enclosure powder coated black.
11. The label contains Technomagnet's catalog number and electrical rating.
12. The Transformer has thermal self-reset 0.8A circuit breaker on secondary side.



**Table 1.**

Output Volts	
120AC	
12VDC	

<b>TechnoMagnet LTD.</b> Interactive Lighting Servers		15547 Cabrito Road Unit A Van Nuys, CA 91406	
		Name _____ Date _____	Page 1 Of 1
DRW.			Title: Compact indoor 12VDC 5VA Low voltage Transformer.
CHK.			
APR.			
Part # TMC 5SDC		Rev. A	