

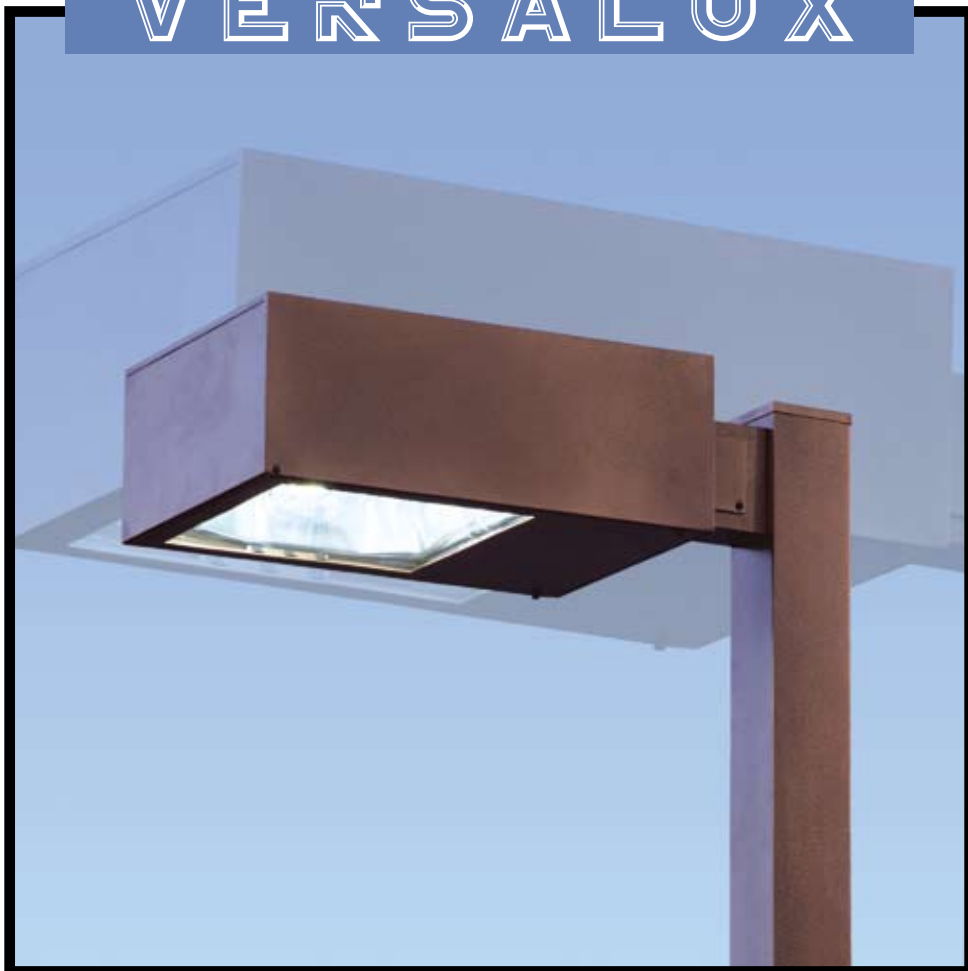


VERSALUX

[400 WATT MAX.]



E.P.A.= 1.72





SPECIFICATIONS



- HOUSING:** ONE PIECE HEAVY GAUGE DIE FORMED ALUMINUM CONSTRUCTION WITH SEPARATE BALLAST COMPARTMENT.
- LENS ASS'Y:** ONE PIECE HINGED HEAVY GAUGE DIE FORMED ALUMINUM DOOR FRAME SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL. TWO CAPTIVE THUMB SCREWS DISENGAGE LENS ASSEMBLY FROM HOUSING WITHOUT THE USE OF TOOLS.
- OPTICS:** COMPUTER DESIGNED ONE PIECE SEMI SPECULAR HYDROFORMED REFLECTOR COMBINES WITH LENS TO PRODUCE A HIGHLY EFFICIENT, SHARP CUTOFF. OPTICS ARE FIELD ROTATABLE.
- GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING SEALS OPTICAL CHAMBER.
- LAMP HOLDER:** MORGAN BASE PORCELAIN.
- LAMP:** [BY OTHERS]
- BALLAST:** H.P.F./C.W.A. AUTO TRANSFORMER. -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO HINGED REMOVABLE TRAY FOR EASY ACCESS.
- ARM:** 3"X5"X6" LONG HEAVY WALL EXTRUDED ALUMINUM. ARM IS SECURED TO HOUSING AND TO POLE WITH STAINLESS STEEL RODS.
- FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOP COAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



POLE DRILLING TEMPLATE




WALL MOUNT




EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

WALL PLATE



**LAMP SIZE:
100 - 400 WATT**



E.P.A. - 1.72

RECTILINEAR HEAVY GAUGE ALUMINUM HOUSING.

FIELD ROTATABLE OPTICS.

FIELD ADJUSTABLE OPTICS. TYPE II AND III LIGHT DISTRIBUTION.

HINGED BALLAST TRAY, WITH QUICK DISCONNECT PLUG FOR EASY ACCESS TO ELECTRICAL COMPONENTS.

TOOLESS LUMINAIRE ACCESS.

ORDERING INFORMATION

MODEL NO. : VRS	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
MODEL NO. : VRS	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
VRS	<input type="checkbox"/> TYPE I I..... (hydroform)	<input type="checkbox"/> 400 <input type="checkbox"/> HPS <input type="checkbox"/> 120	<input type="checkbox"/> 1	STANDARD TEXTURED FINISH	<input type="checkbox"/> CLEAR POLYCARBONATE DIFFUSER LEX
	<input type="checkbox"/> TYPE II II..... (hydroform)	<input type="checkbox"/> 250 <input type="checkbox"/> MH <input type="checkbox"/> 208	STREET LIGHTING ARM MOUNT	<input type="checkbox"/> BLACK RAL-9005-T	<input type="checkbox"/> HOUSE SIDE SHIELD HS
	<input type="checkbox"/> TYPE III III..... (hydroform)	<input type="checkbox"/> 200 <input type="checkbox"/> MV <input type="checkbox"/> 240	<input type="checkbox"/> ST 23..... (TO FIT OVER 2 3/8" O.D. ARM)	<input type="checkbox"/> WHITE RAL-9003-T	<input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) PC+V
	<input type="checkbox"/> TYPE IV (FORWARD THROW) IV..... (segmented)	<input type="checkbox"/> 175 <input type="checkbox"/> 277	ADJUSTABLE KNUCKLE	<input type="checkbox"/> GREY RAL-7004-T	<input type="checkbox"/> TWIST LOCK PHOTO CELL+VOLTAGE (EXAMPLE TPC120V) TPC+V
	<input type="checkbox"/> TYPE V (FORWARD THROW) V-SQ... (segmented)	<input type="checkbox"/> 150 <input type="checkbox"/> 480	<input type="checkbox"/> NKLE23..... (TO FIT OVER 2 3/8" O.D.)	<input type="checkbox"/> DRK BRONZE RAL-8019-T	<input type="checkbox"/> TWIST LOCK RECEPTACLE ONLY TPR
	<input type="checkbox"/> 100 <input type="checkbox"/> MT	<input type="checkbox"/> NKLE27..... (TO FIT OVER 2 7/8" O.D.)	<input type="checkbox"/> GREEN RAL-6005-T	<input type="checkbox"/> TWIST LOCK RECEPTACLE ONLY TPR	
	METAL HALIDE UNITS ONLY USE ED28 LAMP FOR 400 W. USE MEDIUM BASE LAMP FOR 100 W.	WALL MOUNT	<input type="checkbox"/> WM	<input type="checkbox"/> SINGLE FUSE (120V., 277V) SF	
		SEE ACCESSORIES SECTION FOR ST23 AND NKLE DETAILS		<input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF	
				<input type="checkbox"/> TAMPER PROOF TP	
				FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500)	
				SEE WEBSITE FOR ADDITIONAL COLORS	