

GET A QUOTE >

# AMBIENT INDIRECT SCONCE

XL SERIES / 1900 LUMEN MAX LED

speculume decorative



## ID406LEDXL

### APPLICATION

Ambient Series Sconce for indirect lighting illumination. Modern replacement for classic halogen lamp fixture.

### FEATURES

Small profile and clean design blend easily into interior design. Special optics produce forward throw indirect output. Illuminates a wide area with smooth glare-free and hot-spot free illumination. Recessed new construction housing keeps wall details minimal. Easy driver and wiring access. Standard fixture has clear glass safety lens.

### FINISH

Multi-stage polyester powder-coat process applied on our dedicated paint lines. A wide variety of standard and custom finishes are available. All exposed materials are chromate pretreated to resist corrosion.

### ELECTRONICS

LED system features Xicato LED module with proprietary phosphor technology that provides consistent stable color with CCT control of +/- 100K over life of the light engine. Base CRI is 83 with 2 MacAdam Ellipses binning. High CRI is 98 with 1 MacAdam Ellipses binning. Variety of electronic 120v/277v and dimming drivers.


### CONSTRUCTION

Fixture is die cast aluminum with stainless steel hardware. Recessed housing is 20ga. galvanized steel to resist corrosion.

### CODE COMPLIANCE

ARRA Compliant. LM79/LM80/TM21 data available. Manufactured and tested to UL standards No. 1598/8750.

ROUGH-IN WIRING AND DRIVER ENCLOSURE PROVIDED BY SPECTRUM REQUIRES MIN. 2.75" DEPTH FROM FACE OF WALL

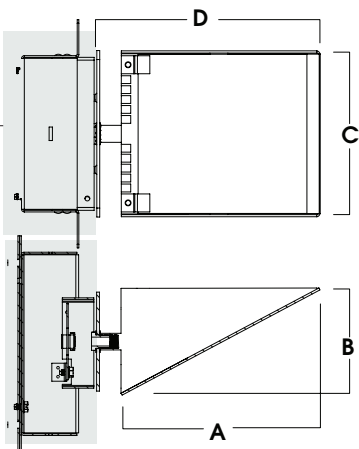

A	B	C	D
5.50	3.0	4.7	6.25
139.7mm	76.2mm	119.4 mm	158.7 mm

GET A QUOTE >

SERIES	LED <sup>1</sup>	CCT	DRIVER / VOLTAGE <sup>3</sup>	OPTIONS <sup>4</sup>	MOUNTING	FINISH <sup>6</sup>
ID406LEDXL	15L 1500 Lm	27K 2700° K	E_ Electronic Driver	1 120v	NC New Construction	<b>GW</b> Gloss White <b>MW</b> Matte White <b>GB</b> Gloss Black <b>MB</b> Matte Black <b>BZ</b> Bronze <b>OB</b> Oil Rubbed Bronze <b>PT</b> Platinum <b>SI</b> Silver <b>GA</b> Galvanized <b>CH</b> Charcoal <b>GH</b> Graphite <b>AM</b> Anodic Malachite <b>SN</b> Sun Gold <b>EG</b> Evergreen <b>VE</b> Verde Green <b>BL</b> Blue Streak <b>CO</b> Copper Metallic
	20L 1900 Lm	30K 3000° K 35K 3500° K 40K 4000° K				
			DS2W1 ELV MLV 1% Phase Dimming, 120v Only; Dims to 0			

EXAMPLE: ID406LEDXL20L35KDS2W1GLNC PT

NOTES:

1 Nominal Source Lumens at 3500° K 2 Nominal Delivered Lumens at 3500° K 3 Contact Factory for Additional Dimming or Control Options 4 See Product Options Page For Details 5 Standard Lens 6 Consult Factory for Custom or Metal Finishes

Dimensions and values shown are nominal. Spectrum Lighting continually works to improve products and reserves the right to make changes which may alter the performance or appearance of products.



PROJECT:	TYPE:
CAT. NO.:	

WWW.SPECLIGHT.COM • 994 JEFFERSON STREET, FALL RIVER, MA 02721 • 508.678.2303 FAX 508.678.2260

LIGHTSOURCE BY XICATO®

