

11040 - INSTALLATION INSTRUCTIONS

LED Exterior Flush Mount

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- · Wear gloves at all time during this installation
- Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Please Note:

1a

- This Alcon Lighting LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- Use ELV (Electronic Low Voltage) or TRIAC type of dimmer for dimming application

- **1.** Remove fixture from its original package
- 2. Separate canopy (2a) from fixture body (3a) by loosening set screws (2b)
- **3.** Separate mounting plate (1c) from canopy (2a) by removing decorative nuts (2c)
- Align mounting plate screws (1d) to desired orientation, and then attach mounting plate (1c) to electrical junction box (1a) using screws provided (1e) in hardware package
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- Align and insert mounting plate screws (1d) through holes on canopy (2a), secure with decorative nuts (2c)
- 7. To prevent moisture from entering outlet box and causing short, seal around perimeter between fixture and mounting surface with weather resistant caulking (see illustration 1)

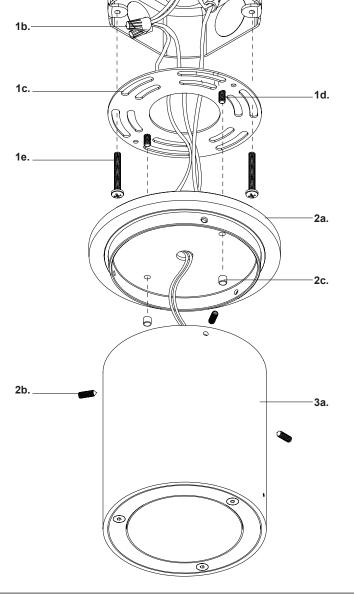


Illustration 1