

FEATURES & SPECIFICATIONS

INTENDED USE

The **Alcon Lighting Watson Architectural LED Modern Wall Mount Direct/Indirect Light Fixture** features soft and diffused lighting ensuring maximum visual comfort and balanced shadows. The Watson is ideal for general office, bank, retail, and institutional environments.


DETAILS

- W 7.25" x L 24" x H 3"
- W 7.25" x L 48" x H 3"
- W 7.25" x L 96" x H 3"

Construction: Die-formed 20 gauge cold-rolled steel
 Flat end plate standard
 4' and 8' sections can be joined to form longer length fixtures
Lens: Semi-specular aluminum louvers
Light Distribution: 5% Up, 95% Down

ADDITIONAL FEATURES

Voltage: 120-277 (50/60 Hz)
Dimming: 0-10V
Lamp Life: L70 - 60,000 Hours
Power Factor: +0.9
Efficiency: +85%
Operating Temperature: -22°F ~ 122°F
Listings: Dry and Damp Location Suitable ARRA Compliant

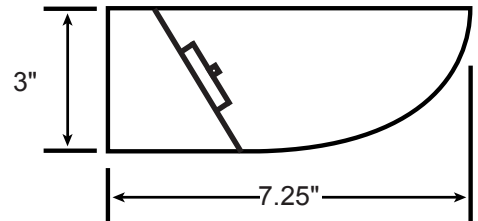

Ordering Information:

Example: (11113-2-22W-27K-MW-EM7)

Model	Size/Wattage/Lumens	Color Temp	Finish	Options
11113	2-22W 22 watts, 2060 lms 2-30W 30 watts, 2810 lms 4-40W 40 watts, 3747 lms 4-60W 60 watts, 5620 lms 8-80W 80 watts, 7494 lms 8-120W 120 watts, 11241 lms	27K 2700K 30K 3000K 35K 3500K 40K 4000K	MW Matte White LG Light Gray	OS Occupancy Sensor DL Damp Location EM7 Emergency Ballast (7 watts, 625 lms) EM10 Emergency Ballast (10 watts, 893 lms)

Lumen output based on 5000K.