


Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Create a powerful source of light from this two-directional product, which mounts on the wall, to create and/or accentuate certain moods and effects. With dual reflectors, our square, architectural-grade light can be used for retail or commercial exteriors or interiors to add downlighting and/or uplighting to a given space.

FEATURES

Construction: Die-cast Aluminum body
Lens: Tempered glass lens
Light Direction: Direct and Indirect
Beam Spread: 45° (Each Side)
Color Temperature: Features the ability to switch color temps from 3000K, 4000K and 5000K
Wattage: 2x12 Watts (24 Watt total)
Voltage: 120V
Lumen: 2x960 lms (1920 lms total)
Dimming Driver: TRIAC 100% to 10%
CRI: 80+
Life: 50,000 hours
Listings: cETLus, Suitable for Wet Locations
Warranty: 5 years carefree for parts & components (labor not included)

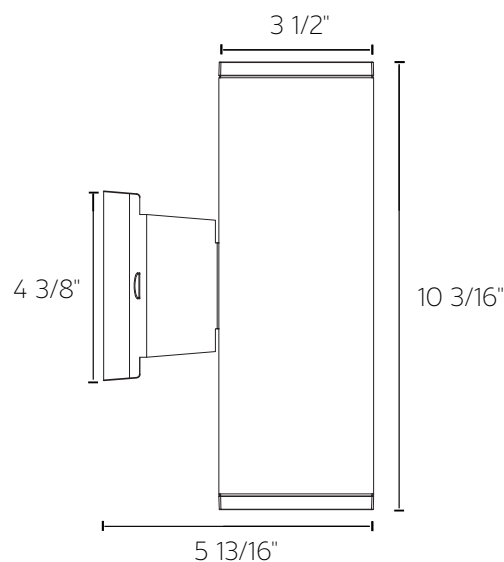

ORDERING INFORMATION Example: (11137-BZ)

Model	Finish	Options
11137	BZ Bronze BN Brushed Nickel WH White BK Black	I-EM Integral Emergency Back-up Battery

