

## FIXTURE SPECIFICATIONS

### INTENDED USE



The specification grade **Alcon Lighting i66 Series Architectural LED Linear Wall Mount Direct Light Fixture** delivers continuous clean lines and clear wall light to commercial, hospitality and residential interior wall lighting applications. Our slim profiles and stylish modern wall sconces offer excellent direct and indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

### AVAILABLE LENGTHS

- 2FT** | W 6" x L 24" x H 6"
- 4FT** | W 6" x L 48" x H 6"
- 8FT** | W 6" x L 96" x H 6"
- Custom Length** | Consult Factory

### FEATURES

- Construction:** Die-formed and welded 22-gauge cold rolled steel
- Lens:** Snap In Frosted Acrylic
- Dimming Driver:** 0-10V (100-10%) 120-277V 5-Wire or Incandescent 120V 2-Wire
- CRI:** 83
- Life:** 50,000 Hours
- Listings:** cETLus Listed, Title 24 Listed

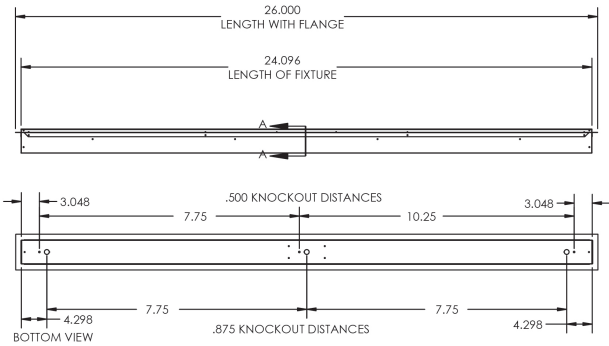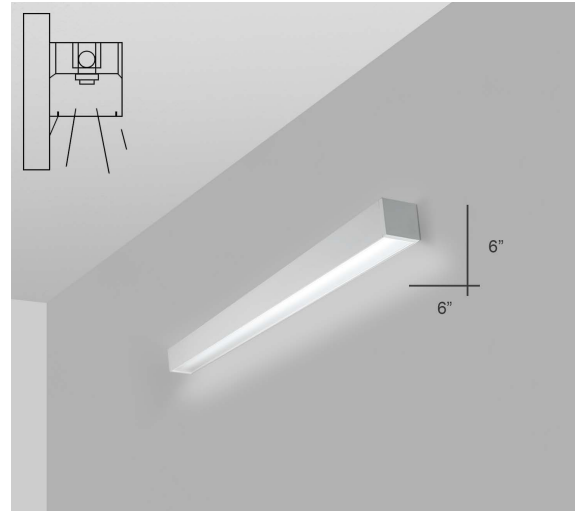

## ORDERING INFORMATION Example: (11142-2-35K-D10-WH-EM)

Model	Length   Wattage   Lumens	Color Temp	Dimming Driver	Finish	Options
<b>11142</b> i66 Wall	<b>2</b> 2 Foot   30 Watts   3400 Lumens	<b>35K</b> 3500K	<b>D10</b> 120-277V 5-Wire 0-10V (100% -10%)	<b>WH</b> White	<b>CRWK</b> Continuous Row Wire Kit
	<b>4</b> 4 Foot   36 Watts   4200 Lumens	<b>40K</b> 4000K			
	<b>8</b> 8 Foot   72 Watts   8400 Lumens	<b>50K</b> 5000K	<b>INC</b> 120V 2-Wire Incandescent (100%-1%)	<b>BK</b> Black	<b>EM</b> Emergency Backup Battery