

FIXTURE SPECIFICATIONS

INTENDED USE


The specification grade **Alcon Lighting NLW Series Architectural LED Linear Wall Mount Direct/Indirect Light Fixture** delivers continuous clean lines and clear wall light to commercial, hospitality and residential interior wall lighting applications. Our slim profiles and stylish modern wall sconces offer excellent direct and indirect lighting, exceptional performance and versatility in offices, classrooms, conference rooms, museums, retail outlets, hotels, restaurants, and more.

AVAILABLE LENGTHS


- 4FT** | W 7.6" x L 48" x H 1.9"
- 8FT** | W 7.6" x L 96" x H 1.9"
- Continuous Run** | Consult Factory
- Custom Length** | Consult Factory

FEATURES

- Construction:** Die-Formed and Welded 22-Gauge Cold Rolled Steel
- Continuous Row:** Full Ability to Tandem Mount for Continuous Run Application Equipped with Male & Female Quick Connect Harnesses
- Custom Design:** Offered with Pre-Fabricated and Fully Illuminated Corners
- Lens:** Glare Free Snap In Frosted Acrylic for Even Distribution
- Voltage:** 120-277V (50/60 Hz) Constant Current
- Dimming:** 5-Wire 0-10V (100%-10%), 3-Wire Electronic Low Voltage (100%-1%)
- CRI:** 80+
- Life:** 50,000 Hours L70
- Warranty:** 5 Years Carefree for Parts & Components (Labor Not Included)
- Listings:** CA Title 24 Compliant, cETL Listed, LED Chips Tested to LM-80 Standards

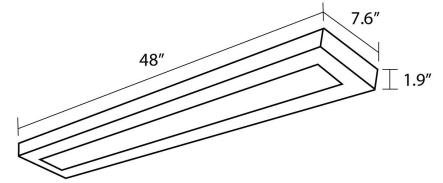

Wall Mount Dimensions

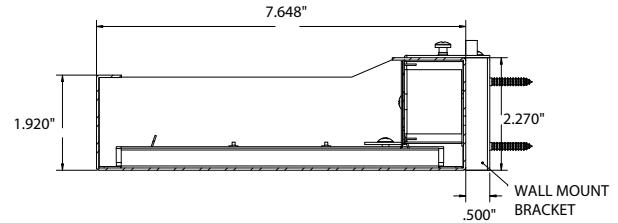

ORDERING INFORMATION Example: (11160-D-R24-S-4-WH-30K-010-EM)

Model	Distribution	Lumen Output	Shape	Finish	Color Temp
11160	D Direct I Indirect	<i>Per 4 Foot Sections</i> R24 24 watts 2400 lms R48 48 watts 4800 lms	S Single Unit CR Continuous Run	Standard WH White BK Black SL Silver Premium RD Red BL Blue GR Green OR Orange SB Satin Brass	Residential 30K 3000K Commercial 35K 3500K 40K 4000K Industrial 50K 5000K
		4' or 8'			
	D/I Direct/Indirect	<i>Per 4 Foot Sections</i> R12D24 UP: 12 watts 1200 lms DOWN: 24 watts 2400 lms R18D36 UP: 18 watts 1800 lms DOWN: 36 watts 3600 lms R36D18 UP: 36 watts 3600 lms DOWN: 18 watts 1800 lms	Total Run (in Feet) 		
				Dimming Driver	Options
				010 Standard 0-10V (100 - 1%) ELV Electronic Low Voltage (100%-1%)	EM Remote Emergency Backup Battery (4ft canopy) AB² Independent Control of Up & Down