

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

The Disk Architectural LED Surface Mount Down Light features an unobtrusive low profile design with low glare. The Disk is an ideal option for commercial and residential interior places.

FEATURES

Construction: 3/4" Super Slim Thin Die-Cast Aluminum Frame for Low to Medium Height Ceilings Integral Heat Sink Design for Maximum Heat Rejection

Ceiling Depth: 1"

Mounting: for Retrofit, New Construction, and Remodel Applications. Universal Mounting Hardware for All Standard Octagonal Electrical Junction Boxes.

Lens: Polycarbonate Frosted White

Voltage: 120V AC

Dimming: ELV Dimming down to 5%


CRI: 90

Operating Temperature: Suitable for Temperatures Down to -4°F (-20°C)

Life: 50,000 Hours

Warranty: 3 Years Carefree for Parts & Components (Labor Not Included)

Listings: ETL/CETL Listed, Suitable for Wet Location Installations, IC Rated

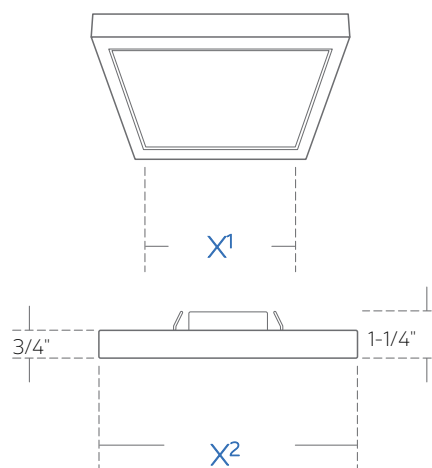

	Dimensions		
	11171-5	11171-7	11171-12
X1	3.875"	7"	11"
X2	5"	8.125"	12"



ORDERING INFORMATION Example: (11171-7-30K-WH)

Model	Size Wattage Lumens	Color Temp	Finish
11171	5 5" 11W 1000 Lumens	35K 3500K	WH White
	7 7" 14W 1300 Lumens	40K 4000K	SL Silver
	12 12" 22W 2100 Lumens	CTS Color Temperature Switch (3000K/3500K/4000K)	BK Black