

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

Mounted by pendant, housed in aluminum and finished in white, the vapor-tight LED light offers high-lumens output for high and low bay applications including commercial kitchens, warehouses, fitness spaces and other high to mid-ceiling heights. Our architectural-grade round high bay product includes a 32" safety cord and 78" power cord.

FEATURES

Construction: Aluminum housing with polycarbonate lens

Mounting: Pendant-mount kit includes 32" safety cord and 78" power cord.

CRI: 80+

Input Voltage: 120~277V, 50/60Hz (standard)
200~480V, 50/60Hz (high voltage)

Dimming: 0-10V dimming

Ambient Operating Temperature: -40°F to 113°F
(-40°C to 45°C)

Color Temperature: 5000K Day light


LED Life: 54,000 hours

Listings: ETL, DLC Premium, IP65, IP69K, NSF

Warranty: 5 years carefree for parts & components
(labor not included)



DIMENSIONS

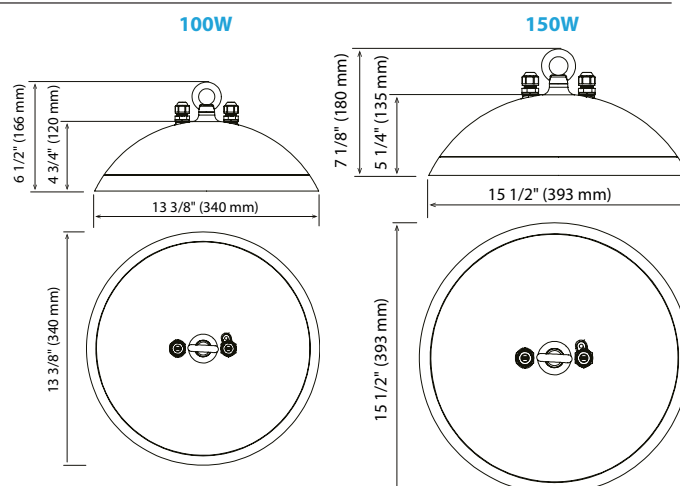


ORDERING INFORMATION Example: (11177-100W)


Model	Diameter Wattage Lumens Voltage
11177 100W	13 Inch 100 Watts 13,069 lum 120-277V
150WHV	15 Inch 150 Watts 21,356 lum 200-480V

100W | 120~277V

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

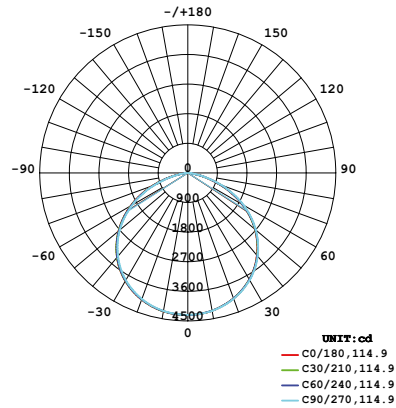


C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

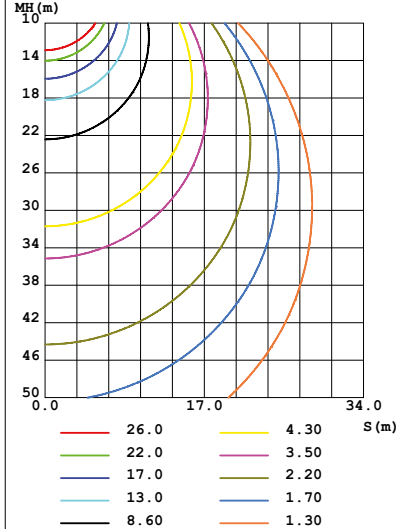


150W | 120~277V

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

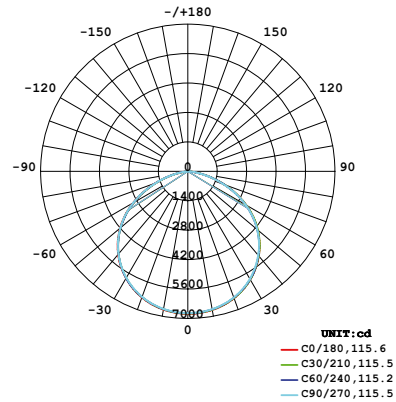


C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

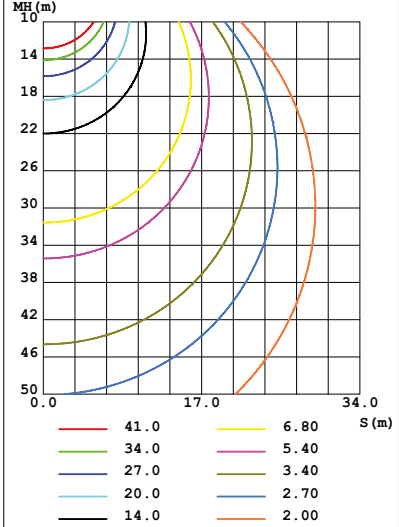


150W | 200~480V

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

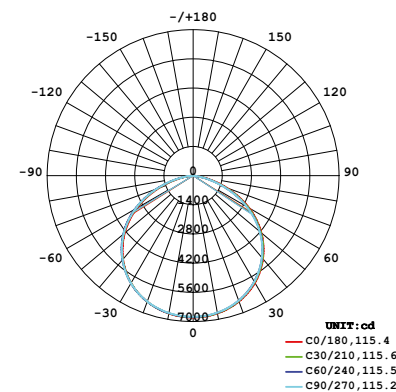

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

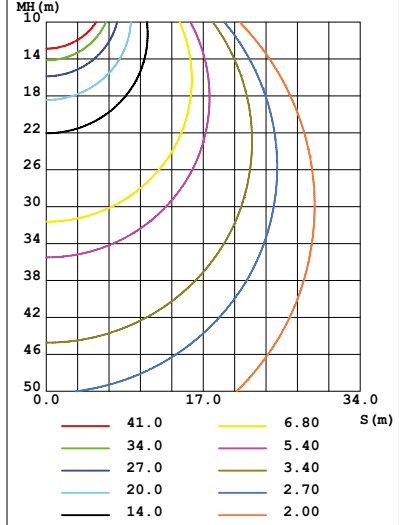

COMPATIBLE DIMMERS

Manufacturer	Dimmer SKUs
LTECH	E610P
LEVITON ®	ZS057-D0Z
LUTRON ®	NFTV
RAB ®	LCLC3/D10