SPECIFICATION SHEET

Project Name:	Type:	Quantity:

INTENDED USE

The Architectural Grade surface or suspended mount Cube Light Fixture is ideal for medium to high ceilings and o ers multiple mounting options. It is the ideal solution for distinctive architectural lighting plans bringing clean lines and clear light to commercial LED or residential lighting interiors.

SIZE

L 5-7/8" x W 5-7/8" x H 6 1/4"

ADDITIONAL FEATURES

CRI: 80+ Standard, 90 CRI available

Mounting: Flat and slope ceiling pendant adapters available. Mounts to standard 4" octagonal electrical box; Universal mounting hardware allows mounting to all standard electrical junction boxes

Life: L70 life of 50,000 hours

Dimming: Universal Dimming option works with 0-10V, ELV and Incandescent Control Systems

Voltage: 120V/277V

Warranty: 5 years carefree for parts & components


(labor not included)

Listings: cETLus, cULus listed to L1598 and UL8750,

Suitable for dry and damp locations. NYC

approved: Calendar #41937.



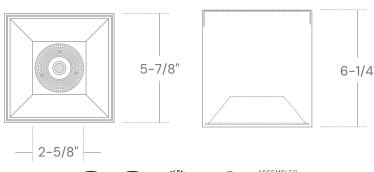











ORDERING INFORMATION Example: (11181-25-D30-MCT-43-B)

١	Mode
	11212

Wattage / Lumens

30 Watts / 1800 lms

30L 30 Watts / 3000 lms

Beam Spread

Blank 45° Flood

WF 70° Wide Flood

Dimming

Blank Non-Dimming

DIM Universal Dimming

Color Temp

27 2700K
30 3000K
35 3500K
40 4000K
27C90 2700K, 90+ CRI

Mounting Options

	9 1		
SM	Surface Mount	S12	12" Sloped Ceiling Pendant
F12	12" Flat Ceiling Pendant	S18	18" Sloped Ceiling Pendant
F18	18" Flat Ceiling Pendant	S24	24" Sloped Ceiling Pendant
F24	24" Flat Ceiling Pendant	S36	36" Sloped Ceiling Pendant
F36	36" Flat Ceiling Pendant		48" Sloped Ceiling Pendant
F48	48" Flat Ceiling Pendant	S48	40 Sloped Celling Peridant