

FEATURES & SPECIFICATIONS

INTENDED USE


The 11214 LED Medium Outdoor Wallpack luminaire is a high performance fixture offering both durability and style. Made of a heavy duty two piece die-cast aluminum housing, the 11214 LED is UL 1598 for wet location and provides durable and efficient exterior lighting solutions for any application with maximum performance and minimum maintenance.

SIZE

W 14.25" x H 9" x D 7.25"

ADDITIONAL FEATURES

- Heavy duty two piece die-cast aluminum housing with side hinged for easy maintenance
- Polyester powder finish for excellent impact, corrosion and UV resistance
- (2) captive stainless steel door fasteners
- 0.5" threaded conduit entry with coin plug
- Clear prismatic borosilicate glass reflector is thermal and shock resistant; Silicone rubber gaskets
- Dimming: Available with 0-10V inputs to 10%
- Operating Temperature: 0°-65°C Max Ambient
- L70 Rating: 100,000+ Hours
- Driver Current: 700mA
- UL 1598 listed for wet locations
- CRI: 80+
- IP55
- UNV 120V-277V

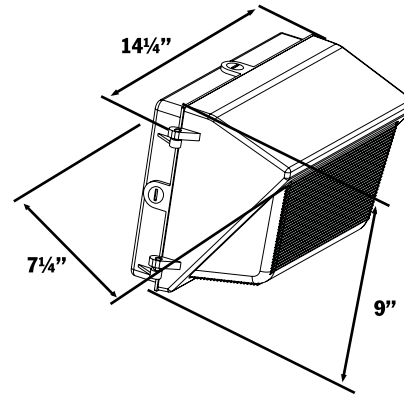

WG- Wire Guard



SC-Side Cutoff



FC-Full Cutoff Visor
*Required for DLC



VR- Polycarbonate
Vandal Resistant Guard

Listings:



Ordering Information:

Example: (11214-30-50-BZ)

Model	Wattage Lumens		Color Temp.		Finish		Options	
11214	20	20W 2030 Lumens ²	30	3000K	BZ	Bronze (standard)	EM	Emergency Ballast
	30	30W 3040 Lumens ²	35	3500K	BL	Black	FC	Full Cutoff Visor ⁴
	40 ¹	40W 4050 Lumens ²	40	4000K	WH	White	WG	Wire Guard
	60 ¹	60W 6090 Lumens ²	50	5000K ³			SC	Side Cutoff
							VR	Polycarbonate Vandal Resistant Guard

¹ DLC Listed; ² Delivered lumens (5000K); ³ With Optics; ⁴ DLC Listed