

Project Name:

Type:

Quantity:



FIXTURE SPECIFICATIONS

INTENDED USE

The **Pavo Turtle Friendly Architectural LED 6 Inch 1-Direction Wall Mount Light Fixture** is a versatile low glare lighting fixture that can be used indoor and outdoor, up or down, in commercial or retail settings. The Pavo is used to accent and create dramatic effects while providing a great source of lighting from above.

FEATURES

- Construction:** One piece high grade aluminum extrusion with die cast aluminum top plate, tamper resistant
- Light Engine:** LED chip-on-board
- Lens:** Round one piece extruded aluminum with powder coat finish, clear, tempered glass and silicone O-ring
- Reflector:** Glare-free, one piece, heavy gauge aluminum
- Mounting:** Includes bracket for installation directly to a 4" octagonal electrical junction-box
- Color Temperature:** 594nm Amber
- Voltage:** 120V (120-277 available for dimming)
- Wattage:** 15W
- Dimming:** Universal dimming system compatible with most 3-wire ELV, 2-wire incandescent and 5-wire 0-10V fluorescent dimmers
- Life:** L70 - 50,000 hours
- Emergency:** 90 minutes minimum, remote test switch, plate cover, junction box included
- Listing:** cETLus, cJLus, IP65, Turtle Safe, Suitable for wet location, Dark Sky Compliant (when fixture points down)
- Warranty:** 5 years carefree for parts & components (labor not included)

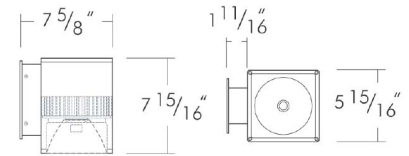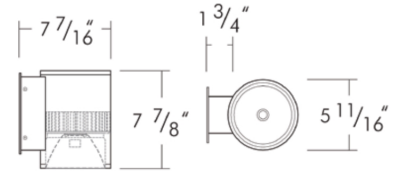

TURTLE SAFE REQUIREMENTS

- Low:** The product is designed for low to medium ceiling heights and delivered lumen output is sufficient to produce enough footcandles to satisfy building codes but not overpower the environment with excessive lumen output.
- Shielded:** The trim is deeply recessed and provides a minimum of 50° of glare cutoff. The trim reflector color is black to limit reflections. The beam spread is tightly controlled.
- Long:** LED color is verified as 585nm minimum and 595nm maximum.



ORDERING INFORMATION Example: (11218-TF-S-WH-UNI-DS)

Model	Shape	Finish	Dimming	Options
11218-TF Pavo-Square Turtle Friendly	S Square	WH White	ND Non-Dimming (120V)	EM Emergency
	R Round	BK Black	UNI Universal (Triac / ELV / 0-10V)	DS Daylight Sensor
		BR¹ Bronze		LV Hex-Cell Louver
		SL¹ Silver		

¹Special Order. Minimum lead time may apply.