

Project Name: \_\_\_\_\_ Type: \_\_\_\_\_ Quantity: \_\_\_\_\_

### INTENDED USE


This is a versatile, low-glare product. It can be used for interior and exterior retail or commercial lighting. The light's dual reflector permits indirect and direct lighting by a single fixture.

### PRODUCT FAMILY

- 11218-DIR** Cylinder Direct
- 11218-ADJ** Cylinder Adjustable
- 11219-2D** Cylinder Direct Indirect
- 11220-DIR** Square Direct
- 11221-2D** Square Direct Indirect

### FEATURES

**Construction:** Round One Piece High Grade Aluminum with corrosion-resistant finish with two (2) face-plates  
**Light Engine:** LED Chip-On-Board  
**Lens:** Tempered Glass and Silicone O-Ring  
**Reflector:** Glare-Free, One piece, Heavy Gauge Aluminum  
**Mounting:** Includes Bracket for Installation Directly to a 4" octagonal electrical junction-box  
**Voltage:** 120V (*Non-Dimming*), 120V/277V (*Dimming*)  
**CRI:** 84+  
**Dimming Driver:** Universal Dimming System Compatible with 2-Wire TRIAC, 3-Wire ELV, and 5-Wire 0-10V Dimmers  
**Life:** L70 - 50,000 Hours  
**Emergency Battery:** External 90 min. w/ remote test switch. Plate Cover and Junction Box included.  
**Electrical:** Electronic Direct Current Class 2 driver  
**Warranty:** 5 Years Carefree for Parts and Components (Labor not included). Install surge protectors on the LED housing power supply to prevent damage is recommended, as surge-related issues aren't covered by warranty  
**Listings:** Dark Sky Compliant when fixture is pointing downward. ETL/cETL Listed, Suitable for Wet Location, IP65, Assembled in USA

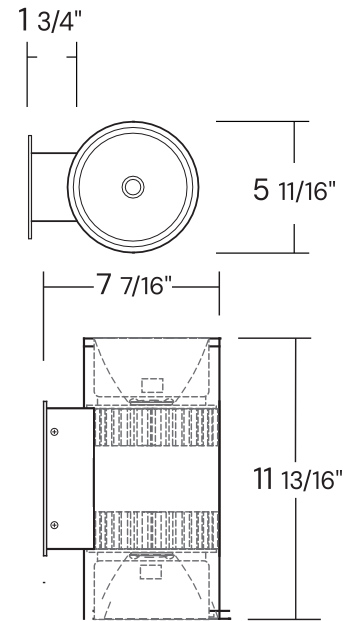

Pavo 6-inch 2-Directional Cylinder Wall Mount Architectural LED



### ORDERING INFORMATION Example: (11219-2D-L30-B60-B10-UNI-40K-WH-XEM)

Down                      Up

Model	Lumens   Watts <sup>1</sup>	Optics	Driver	Color Temperature	Finish	Options
<b>11219-2D</b>	<b>L20</b> <sup>Standard</sup> 2000 lm   20W	<b>B10</b> 10° Spot	<b>ND</b> <sup>Standard</sup> Non-Dimming (120V)	<b>27K</b> 2700K	<b>WH</b> White	<b>XEM</b> External Battery
	<b>L30</b> 3000 lm   30W	<b>B20</b> 20° Wide Spot	<b>UNI</b> Universal (120V / 277V)	<b>30K</b> 3000K	<b>BK</b> Black	<b>SL</b> Silver
	<b>L44</b> 4400 lm   45W	<b>B45</b> 45° Flood		<b>35K</b> 3500K	<b>BZ</b> Bronze	
	<b>L52</b> 5200 lm   60W	<b>B60</b> <sup>Standard</sup> 60° Wide Flood		<b>40K</b> <sup>Standard</sup> 4000K		
		<b>WW</b> Wall Wash <b>IV</b> Type IV (forward throw)		<b>50K</b> 5000K		

<sup>1</sup> Lumen noted is for the total fixture (50% up and 50% down)

## COLOR TEMPERATURE GUIDE

