

## FIXTURE SPECIFICATIONS

### INTENDED USE

This square wall downlight yields a versatile, low-glare function. Our product can be used for interior and exterior retail or commercial lighting. The architectural LED fixture adds and enhances effects, safety and security. Exclusively for downlighting.

### PRODUCT FAMILY

- 11218-DIR** Cylinder Direct
- 11218-ADJ** Cylinder Adjustable
- 11219-2D** Cylinder Direct Indirect
- 11220-DIR** Square Direct
- 11221-2D** Square Direct Indirect

### FEATURES

**Construction:** Square One Piece High Grade Aluminum with corrosion-resistant finish

**Light Engine:** LED Chip-On-Board

**Lens:** Tempered Glass and Silicone O-Ring

**Reflector:** Glare-Free, One piece, Heavy Gauge Aluminum

**Mounting:** Includes Bracket for Installation Directly to a 4" octagonal electrical junction-box

**Voltage:** 120V (Non-Dimming), 120V/277V (Dimming)

**CRI:** 84+

**Dimming:** Universal Dimming System Compatible with 2-Wire TRIAC, 3-Wire ELV, and 5-Wire 0-10V Dimmers

**Life:** L70 - 50,000 Hours

**Emergency:** 90 Minutes Minimum, Remote Test Switch, Plate Cover, Junction Box Included



**Listing:** ETL/cETL Listed Suitable for Wet Location. Assembled in the US (IP65)

**Electrical:** Electronic Direct Current Class 2 driver

**Warranty:** 5 Years Carefree for Parts and Components (Labor not included).

We recommend the use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty.

**Compliance:** Dark Sky Compliant when fixture is pointing downward.

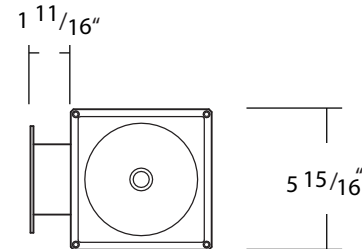

## ORDERING INFORMATION Example: (11218-DIR-L15-B60-UNI-40K-WH-EM)

Model	Lumen	Beam Spread	Dimming	Color Temperature	Finish	Options
<b>11220-DIR</b> Pavo-Square	<b>L10</b> 1000 lm (15W) <i>Standard</i>	<b>B2</b> 2° Narrow Spot	<b>ND</b> <i>Standard</i>	<b>27K</b> 2700K	<b>WH</b> White	<b>EM</b> Emergency
	<b>L15</b> 1500 lm (22W)	<b>B10</b> 10° Spot	Non-Dimming (120V)	<b>30K</b> 3000K	<b>BK</b> Black	
	<b>L22</b> 2200 lm (22W)	<b>B20</b> 20° Wide Spot	<b>UNI</b>	<b>35K</b> 3500K	<b>SL</b> Silver	
	<b>L26</b> 2600 lm (30W)	<b>B45</b> 45° Flood	Universal (120V / 277V)	<b>40K</b> 4000K <i>Standard</i>	<b>BZ</b> Bronze	
		<b>B60</b> 60° Wide Flood <i>Standard</i>		<b>50K</b> 5000K		
		<b>WW</b> Wall Wash				
		<b>IV</b> Type IV (forward throw)				

## COLOR TEMPERATURE GUIDE

