

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The **Pavo LED Architectural 2-Direction Wall Mount 6-Inch Light** is a versatile low glare fixture that can be used indoor and outdoor in commercial or retail settings with dual reflectors that allow for direct and indirect lighting. The 2-Direction 6" Pavo is used to accent and create dramatic effects while providing a great source of lighting.

FEATURES

Construction: Square one piece high grade aluminum extrusion with die cast aluminum top plate, tamper resistant

Light Engine: LED chip-on-board

Lens: Round one piece extruded aluminum with powder coat finish, clear, tempered glass and silicone O-ring

Reflector: Glare-free, one piece, heavy gauge aluminum

Mounting: Includes bracket for installation directly to a 4" octagonal electrical junction-box

Voltage: 120V (120-277 available for dimming)

CRI: 84+

Dimming: Universal dimming system compatible with most 3-wire ELV, 2-wire incandescent and 5-wire 0-10V fluorescent dimmers


Life: L70 - 50,000 hours

Emergency: 90 minutes minimum

remote test switch, plate cover, junction box included

Listing: cETLus, cULus, Title 24, IP65, Suitable for wet location

Warranty: 5 Years Carefree for Parts and Components (Labor not included). We recommend the use of surge protectors on the power entering LED Housings. Fixture should not be installed in applications with ambient temperature above 60 degrees C. Doing so will result in reduced lamp life and voided warranty.

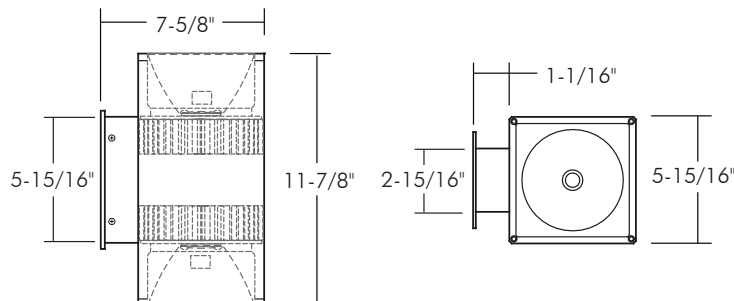

ORDERING INFORMATION Example: (11221-2D-30W-SP20/FL45-ND-40K-WH-EM-DS)

Model	Lumen Output	Beam Spread (Down)	Beam Spread (Up)	Dimming	Color Temp	Finish	Options
11221-2D Pavo-Square 2-Direction	20W 2 x 1000 lms 20W	WF60 60° Wide Flood	WF60 60° Wide Flood	ND Non-Dimming (120V)	17K¹ 1700K	WH White	EM Emergency
	30W 2 x 1500 lms 30W	PE2¹ 2° Pencil	PE2¹ 2° Pencil	UNI Universal (Triac / ELV / 0-10V)	20K¹ 2000K	BK Black	DS Daylight Sensor
	45W 2 x 2200 lms 45W	NS10¹ 10° Narrow Spot	NS10¹ 10° Narrow Spot		27K 2700K	BR¹ Bronze	
	60W 2 x 2600 lms 60W	SP20¹ 20° Spot	SP20¹ 20° Spot		30K 3000K	SL¹ Silver	
		FL45 45° Flood	FL45 45° Flood		35K 3500K		
		WW Wall Wash	WW Wall Wash		40K 4000K		
		IV Type IV (forward throw)	IV Type IV (forward throw)		50K 5000K		
					56K¹ 5600K		
					27C¹ 2700K (97 CRI)		
					30C¹ 3000K (97 CRI)		

¹Special Order. Minimum lead time may apply.
Minimum Order Required (25).