

Project Name:

Type:

Quantity:


FIXTURE SPECIFICATIONS

INTENDED USE

The **Pavo LED Architectural 2-Direction Wall Mount 6-Inch Light** is a versatile low glare fixture that can be used indoor and outdoor in commercial or retail settings with dual reflectors that allow for direct and indirect lighting. The 2-Direction 6" Pavo is used to accent and create dramatic effects while providing a great source of lighting.

FEATURES

- Construction:** Square one piece high grade aluminum extrusion with die cast aluminum top plate, tamper resistant
- Light Engine:** LED chip-on-board
- Lens:** Round one piece extruded aluminum with powder coat finish, clear, tempered glass and silicone O-ring
- Reflector:** Glare-free, one piece, heavy gauge aluminum
- Mounting:** Includes bracket for installation directly to a 4" octagonal electrical junction-box
- Voltage:** 120V (120-277 available for dimming)
- CRI:** 84+
- Dimming:** Universal dimming system compatible with most 3-wire ELV, 2-wire incandescent and 5-wire 0-10V fluorescent dimmers
- Life:** L70 - 50,000 hours
- Emergency:** 90 minutes minimum remote test switch, plate cover, junction box included
- Listing:** cETLus, cULus, Title 24, IP65, Suitable for wet location

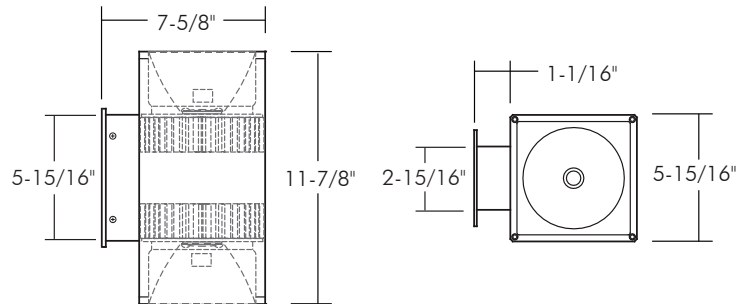

Alcon 11221-2D Pavo Architectural LED 6-Inch Square 2-Direction Wall Mount Light Fixture

ORDERING INFORMATION Example: (11221-2D-30W-SP20/FL45-ND-40K-WH-EM-DS)

Model	Lumen Output	Beam Spread (Down)	Beam Spread (Up)	Dimming	Color Temp	Finish	Options	
11221-2D Pavo-Square 2-Direction	30W 2 x 1000 lms 30W	WF60 60° Wide Flood	WF60 60° Wide Flood	ND Non-Dimming (120V) UNI Universal (Triac / ELV / 0-10V)	17K¹ 1700K	WH White	EM Emergency	
	45W 2 x 1500 lms 45W	PE2¹ 2° Pencil	PE2¹ 2° Pencil		20K¹ 2000K			BK Black
	452W 2 x 2200 lms 45W	NS10¹ 10° Narrow Spot	NS10¹ 10° Narrow Spot		30K 3000K			BR¹ Bronze
	64W 2 x 2600 lms 64W	SP20¹ 20° Spot	SP20¹ 20° Spot		35K 3500K			SL¹ Silver
		FL45 45° Flood	FL45 45° Flood		50K 5000K			
		WW Wall Wash	WW Wall Wash		56K¹ 5600K			
		IV Type IV (forward throw)	IV Type IV (forward throw)		27C¹ 2700K (97 CRI)			
					30C¹ 3000K (97 CRI)			

¹Special Order. Minimum lead time may apply.
Minimum Order Required (25).