

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE



The specification grade Alcon Lighting 11224-IEM Pavo Architectural LED 6 Inch Square Surface Ceiling Mount Direct Down Light Fixture with Integral Emergency Backup is a versatile low glare lighting fixture that can be used indoor and outdoor in commercial or retail settings. The Pavo is used to accent and create dramatic effects while providing a great source of lighting from above.

PRODUCT FAMILY

- 11224-DIR** Square Direct Downlight
- 11226-DIR** Round Direct Downlight
- 11226-ADJ** Round Adjustable Downlight
- 11224-TF-S** Square Turtle Friendly Downlight
- 11224-TF-R** Round Turtle Friendly Downlight

FEATURES

- Construction:** Square one piece high grade aluminum extrusion with die cast aluminum top plate
tamper resistant
- Light Engine:** LED chip-on-board
- Lens:** Clear tempered glass
- Reflector:** Glare-free, one piece, heavy gauge aluminum
- Mounting:** Mounts directly to (or over) 4" octagonal electrical junction-box
- Voltage:** 120V/277V AC 50/60Hz
- Dimming:** 0-10V Dimmable
- Power Factor:** > 0.90
- CRI:** 84+
- Life:** L70 - 50,000 Hours
- Integral Emergency:** 90 minutes minimum. 800lms output.
- Warranty:** 5 years carefree for parts & components (labor not included)
- Listing:** cETLus, cULus, IP65, Dark Sky compliant, Assembled in the USA, IK08 rated for impact resistance.

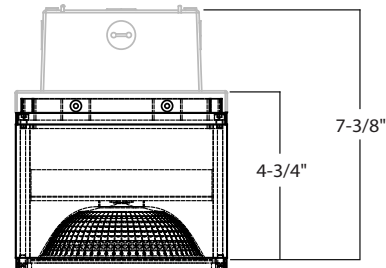

ORDERING INFORMATION Example: (11224-IEM-WH-10-10-30K)

| Model | Finish | Wattage Lumen | Beam Spread | Color Temperature |
|--|------------------|------------------------|---------------------------|-------------------|
| 11224-IEM Surface Mount Downlight with Integral EM | WH White | 10 10W 1000L | 10 10° Narrow Spot | 27K 2700K |
| | SL Silver | 15 15W 1500L | 20 20° Spot | 30K 3000K |
| | BR Bronze | 22 22W 2200L | 45 45° Flood | 35K 3500K |
| | BK Black | 30 30W 2600L | 60 60° Wide Flood | 40K 4000K |
| | | 50K 5000K | | |
| | | AMB Amber 590nm | | |