



FIXTURE SPECIFICATIONS

INTENDED USE

The **Pavo LED Architectural Wall Mount Down Light** is a versatile low glare lighting fixture that can be used indoor and outdoor, up or down, in commercial or retail settings. The Pavo is used to accent and create dramatic effects while providing a great source of lighting from above.

FEATURES

- Construction:** Round One Piece High Grade Aluminum Extrusion with Die Cast Aluminum Top Plate
Tamper Resistant
- Adjustable Option:** 25° Rotation
- Light Engine:** LED Chip-On-Board
- Lens:** Round One Piece Extruded Aluminum with Powder Coat Finish, Clear, Tempered Glass and Silicone O-Ring
- Reflector:** Glare-Free, One piece, Heavy Gauge Aluminum
- Mounting:** Includes Bracket for Installation Directly to a 3-1/2" or 4" octagonal electrical junction-box
- Voltage:** 120 (120-277 Available for Dimming)
- CRI:** 84+
- Dimming:** Universal Dimming System Compatible with Most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V Fluorescent Dimmers
- Life:** L70 - 50,000 Hours
- Emergency:** 90 Minutes Minimum
Remote Test Switch, Plate Cover, Junction Box Included
- Listing:** ETL/cETL Listed
Suitable for Wet Location




ORDERING INFORMATION Example: (11225-DIR-15W-WF60-UNI-40K-WH-EM)


Model	Lumen Output	Beam Spread	Dimming	Color Temperature	Finish	Options
11225 Pavo-Square	<i>DIRECT DOWN LIGHT</i> DIR-15W 15 watts 1000 lms	WF60 60° Wide Flood	ND Non-Dimming (120V)	17K^{3,4} 1700K 25K^{3,4} 2500K	WH White	EM Emergency
11226 Pavo-Round	DIR-22W 22 watts 1500 lms	PE2¹ 2° Pencil	UNI Universal (Triac / ELV / 0-10V)	27K³ 2700K 30K 3000K 35K³ 3500K 40K 4000K 50K³ 5000K 56K^{3,4} 5600K	BK Black BR³ Bronze SL³ Silver	DS Daylight Sensor FR Frosted Lens
	<i>ADJUSTABLE</i> ADJ-9W 9 watts 700 lms	NS10¹ 10° Narrow Spot SP20¹ 20° Spot		27C³ 2700K (97 CRI) 30C³ 3000K (97 CRI)		
	<i>2-DIRECTION</i> 2D-30W 30 watts 2000 lms 2D-45W 45 watts 3000 lms	FL45 45° Flood WW¹ Wall Wash				

¹Not Available for Adjustable Models.
²Special Order. Minimum lead time may apply.
³Minimum Order Required (25).


Square - Direct

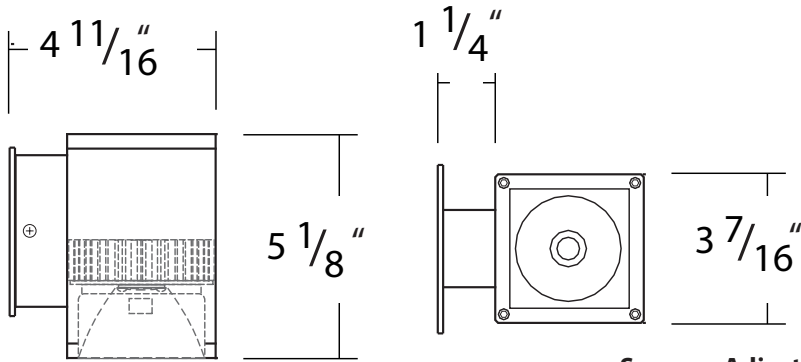

Square - Adjustable

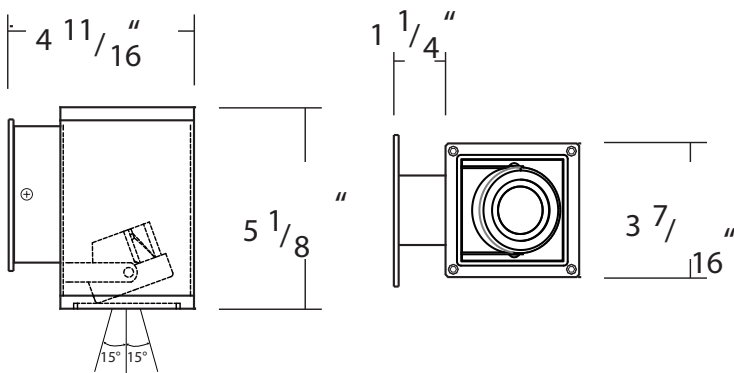

Round - Direct

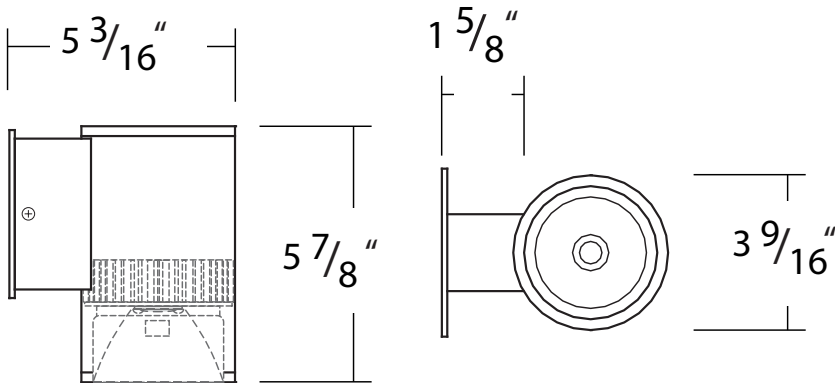

Round - Adjustable

