

Project Name:

Type:

Quantity:

FIXTURE SPECIFICATIONS

INTENDED USE

The **Pavo LED Architectural 2-Direction Wall Mount Light** is a versatile low glare fixture that can be used indoor and outdoor in commercial or retail settings with dual reflectors that allow for direct and indirect lighting. The 2-Direction Pavo is used to accent and create dramatic effects while providing a great source of lighting.

FEATURES

Construction: Square one piece high grade aluminum extrusion with die cast aluminum top plate, tamper resistant

Light Engine: LED chip-on-board

Lens: Round one piece extruded aluminum with powder coat finish, clear, tempered glass and silicone O-ring

Reflector: Glare-free, one piece, heavy gauge aluminum

Mounting: Includes bracket for installation directly to a 4" octagonal electrical junction-box

Voltage: 120V (120-277 available for dimming)

Wattage: 30W

Lumen: 2 x 850 lms


CRI: 84+

Dimming: Universal dimming system compatible with most 3-wire ELV, 2-wire incandescent and 5-wire 0-10V fluorescent dimmers

Life: L70 - 50,000 hours

Emergency: 90 minutes minimum remote test switch, plate cover, junction box included

Listing: cETLus, cULus, Title 24, IP65, Suitable for wet location

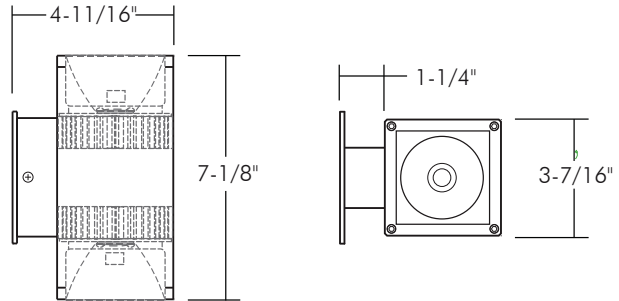

ORDERING INFORMATION Example: (11227-2D-30W-WF60/WF60-ND-40K-WH-EM)

Model	Beam Spread (Down)	Beam Spread (Up)	Dimming	Color Temp	Finish	Options
11227-2D Pavo-Square 2-Direction	WF60 60° Wide Flood	WF60 60° Wide Flood	ND Non-Dimming (120V) 010 0-10V Dimming	17K¹ 1700K	WH White BK Black BR¹ Bronze SL¹ Silver	EM Remote Emergency Backup Battery
	PE2¹ 2° Pencil	PE2¹ 2° Pencil		20K¹ 2000K		
	NS10¹ 10° Narrow Spot	NS10¹ 10° Narrow Spot		27K 2700K		
	SP20¹ 20° Spot	SP20¹ 20° Spot		30K 3000K		
	FL45 45° Flood	FL45 45° Flood		35K 3500K		
	WW Wall Wash	WW Wall Wash		40K 4000K		
	IV Type IV (forward throw)	IV Type IV (forward throw)		50K 5000K		
				56K¹ 5600K		
				27C¹ 2700K (97 CRI)		
				30C¹ 3000K (97 CRI)		

¹Special Order. Minimum lead time may apply.
Minimum Order Required (25).