

FIXTURE SPECIFICATIONS

INTENDED USE

Add architectural-grade uplighting and downlighting to your commercial, hospitality and residential exterior walls. Our cylindrical sconces illuminate with elegance and versatility. Choose a nickel, black, bronze or white finish.

PRODUCT FAMILY

SHORT | Dia \varnothing 4" x H 8" x W 5-3/4"

TALL | Dia \varnothing 4" x H 12" x W 5-3/4"

FEATURES

Construction: Die-cast Aluminum

Color Temperature Switching: Capable of switching from 3 color temperatures: 3000K/4000K/5000K

Wattage Temperature Switching: Capable of switching from 2 Wattages: 15W/30W

Voltage: 120V AC (Short), 120-277V (Tall)

Dimming: TRIAC @ 120V or 0-10V Dimming at 120-277V (Only for Tall)

Beam Spread: 40° Flood

CRI: 80

Maximum Ambient Temperature: -68°F to 104°F



Warranty: 7 Years Carefree for Parts & Components (Labor Not Included)

Listings: cETLus Listed, Suitable for Wet Locations, IP44 (Short), IP65 (Tall)



SHORT (1)
Down Light Only

TALL (2)
Up and Down Light

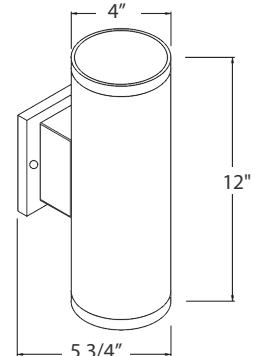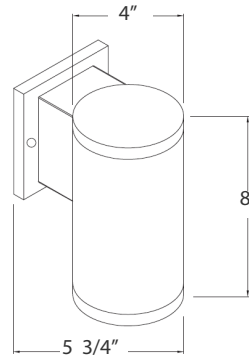

White

Bronze

Brushed Nickel

Black




The color temperature switch is located under the arm of the fixture.



ORDERING INFORMATION Example: (11240-1-BK)


Model	Size Light Direction Wattage Lumens	Finish
11240	1 Short Down Light Only 15W 1200lm	BK Black
	2 Tall Up and Down Light 15W (Down light) or 30W (Up/Down light, 15W per end) 2400lm	WH White BR Bronze BN Brushed Nickel

Photometrics: 11240-1 (Downlight)


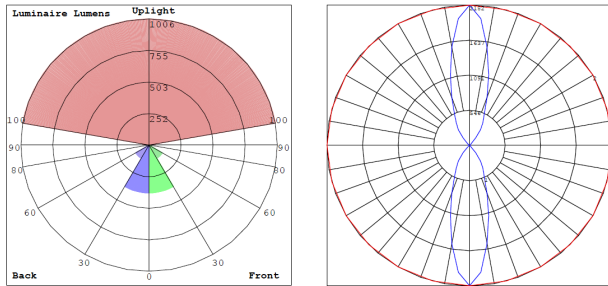


BUG Rating: B1-U5-G0

Photometrics: 11240-2 (Up & Down Light)

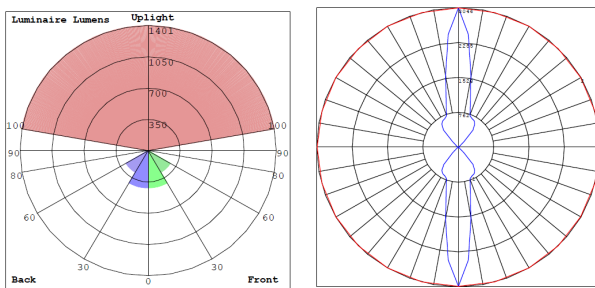

BUD Rating: B1-U5-G0

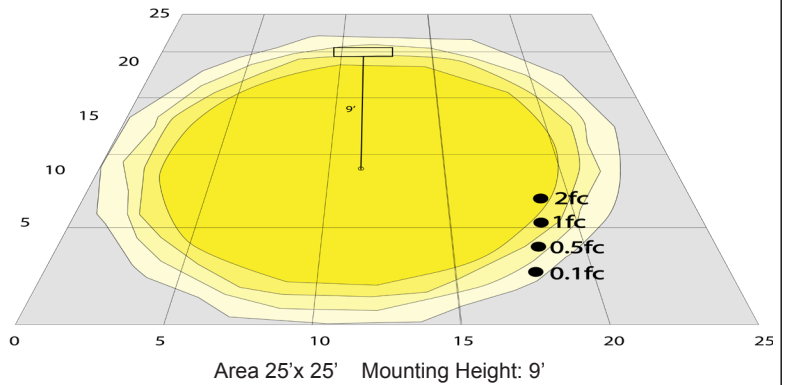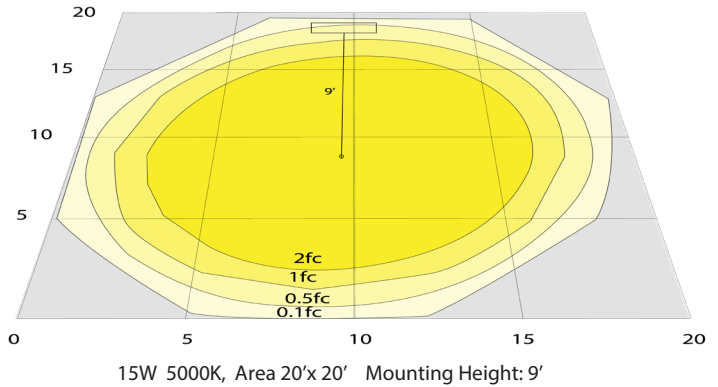

COLOR TEMPERATURE GUIDE

