

FIXTURE SPECIFICATIONS

INTENDED USE

Add architectural-grade uplighting and downlighting to your commercial, hospitality and residential exterior walls. Our cylindrical sconces illuminate with elegance and versatility. Choose a nickel, black, bronze or white finish.

PRODUCT FAMILY

SHORT | Dia \varnothing 4" x H 8" x W 5-3/4"

TALL | Dia \varnothing 4" x H 12" x W 5-3/4"

FEATURES

Construction: Die-cast Aluminum

Color Temperature Switching: Capable of switching from 3 color temperatures: 3000K/4000K/5000K

Voltage: 120V AC

Dimming: TRIAC

Beam Spread: 45° Flood

CRI: 80

Maximum Ambient Temperature: -68°F to 104°F



Warranty: 7 Years Carefree for Parts & Components (Labor Not Included)

Listings: cETLus Listed, Suitable for Wet Locations, IP44



SHORT (1)
Down Light Only

TALL (2)
Up and Down Light

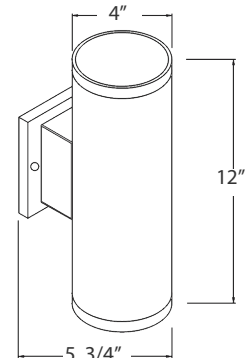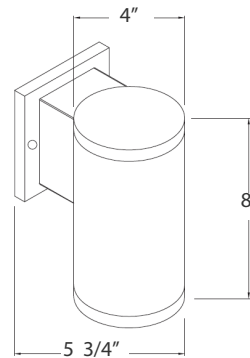

Black

White

Bronze

Brushed Nickel



The color temperature switch is located under the arm of the fixture.



ORDERING INFORMATION Example: (11240-1-BK)

Model

Size | Light Direction | Wattage | Lumens


Finish

11240
Zen


1 Short | Down Light Only | 15W | 1200lm
2 Tall | Up and Down Light | 30W | 2400lm

BK Black
WH White
BR Bronze
BN Brushed Nickel


Photometrics: 11240-1 (Downlight)

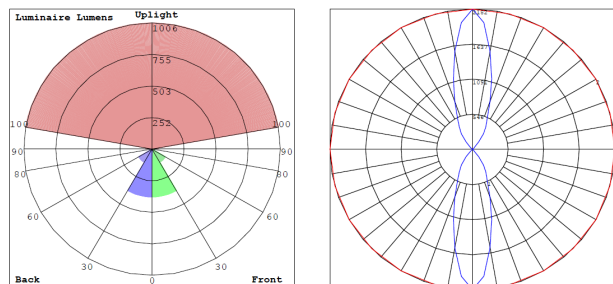


BUG Rating: B1-U5-G0

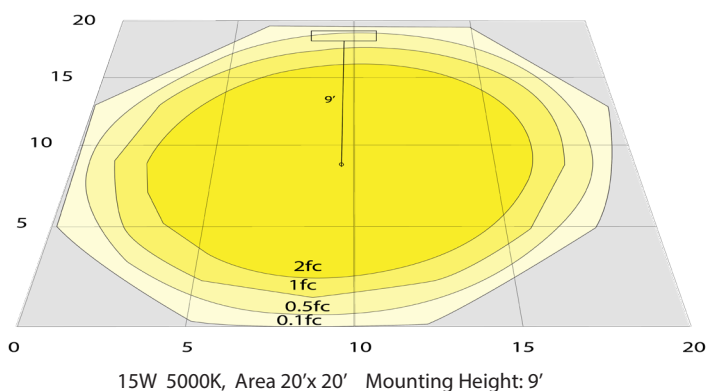

Photometrics: 11240-2 (Up & Down Light)

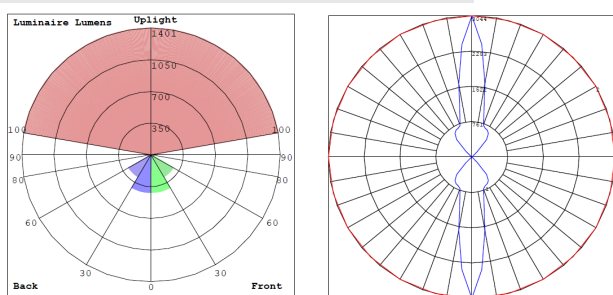

BUG Rating: B1-U5-G0

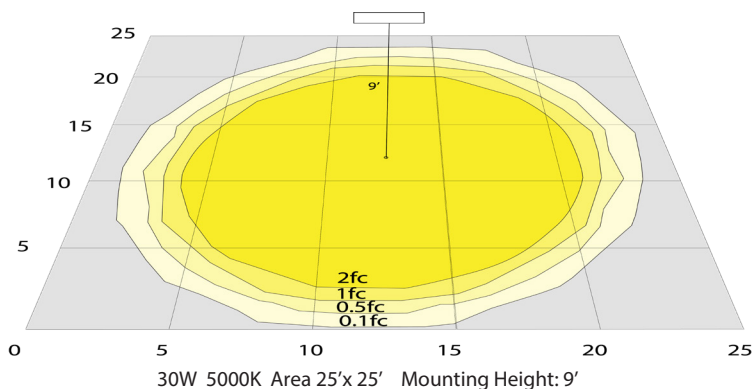

COLOR TEMPERATURE GUIDE

