


Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Alcon Lighting's RGBW Outdoor Linear Wall Wash LED Light is engineered for optimal illumination of building facades, signage, and other wall-washing applications. Available in two sizes, this RGBW fixture provides flexible lighting solutions for diverse project needs. A selection of optical lens options, including narrow, medium, wide, and elliptical beams, allows for precise customization.

FEATURES

- Construction:** Extruded Aluminum
- Color Temperature:** RGB/ RGB+30K/ RGB+40K/ RGB+65K
- CRI:** 90+
- Voltage:** 120-277V
- Control:** DMX
- WiFi Controls:** iOS/Android
- Operating frequency:** 50/60 Hz
- Power Consumption:** 9 watt per ft.
- Lumen Output:** 270 lumens per foot
- Max run:** Linkable up to 28 foot
- Life:** 70,000 Hours
- Listing:** ETL Listed, IP66 Outdoor/ Wet Location
- Warranty:** 5 years carefree for parts & components (Labor not included)

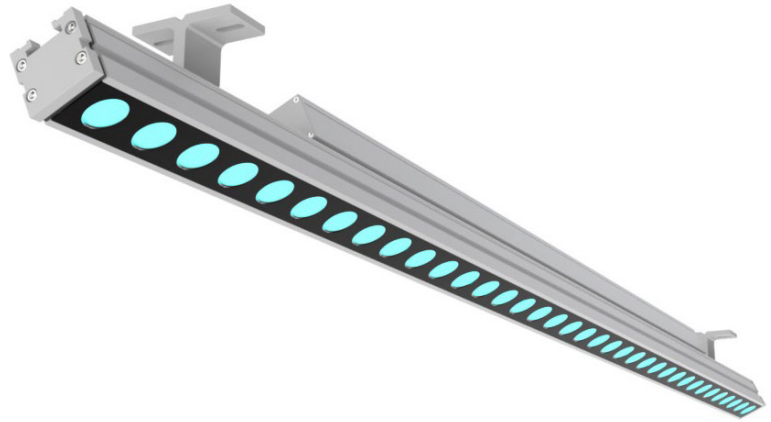

Size	Wattage	Lumens
12"	9W	270lms
48"	36W	1080lms





ORDERING INFORMATION Example:


Model	Length	Optics	Color Temp	Finish	Mounting	Accessories	Control
11245-RGBW	1 1 ft.	10 10°	RGB	BK	ST ²	LC1	DMX
	4 4 ft.	25 25°	RGBW30	WH	Standard	LC3	DMX Wall Control (White)
		35 35°	RGBW40	TG	Tilting	LC6	DMX-W-WIFI
		WW ¹ 20° x 50°	RGBW65	Grey	Extended Tilting Stake	HC6 HC10	DMX-B-WIFI
			RGB (3000K)			6 ft. Link Cable	DMX Wall Control (White) + WiFi
			RGB + W (4000K)			3 ft. Link Cable	DMX Wall Control (White) + WiFi
			RGB + W (6500K)			6 ft. Link Cable	DMX Wall Control (Black) + WiFi
						6 ft. Hardwire Cable	
						10 ft. Hardwire Cable	
						LV	Symmetric Anti-Glare Louver

¹For wall wash applications
²Two Standard Tilting brackets are included. Further information in Pg. 3.

LINE DRAWINGS

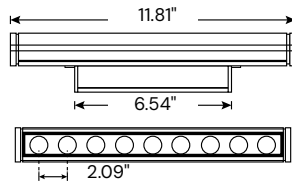


11245-RGBW-12

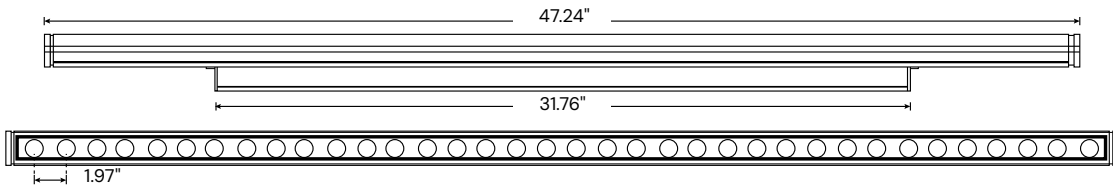


11245-RGBW-48


OPTICS




15°



20°



35°




20° X 50°

RGB DMX CONTROLS



DMX Wall Control



DMX Wall Control + WiFi

WiFi-104




iOS + Android

MOUNTING


Standard Tilting

Included with every Fixture

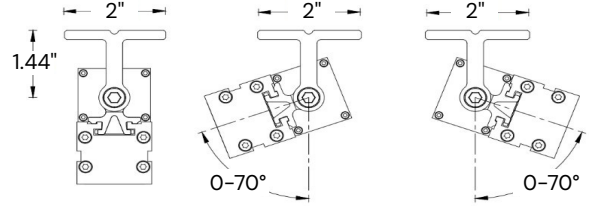


Extended Tilting

Sold separately

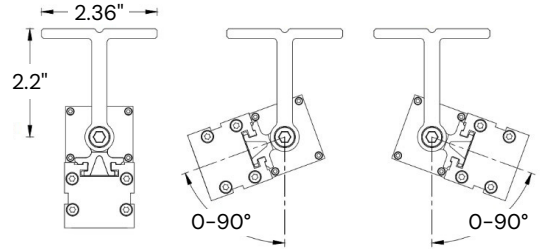

Stake

Sold separately

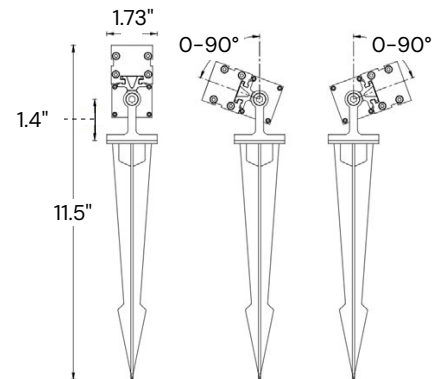

ACCESSORIES

Link Cable

Link extension cable is available in 1 ft., 3 ft., and 6 ft.

- LC1
- LC3
- LC6



Hardwire Cable

Hardwire cable is available in 6 ft. and 10 ft.

- HC6
- HC10



Symmetric Anti-Glare Louver

LV

