ALCON LIGHTING

SPECIFICATION SHEET

Shop Now

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

Alcon Lighting's RGBW Outdoor Linear Wall Wash LED Light is engineered for optimal illumination of building facades, signage, and other wall–washing applications. Available in two sizes, this RGBW fixture provides flexible lighting solutions for diverse project needs. A selection of optical lens options, including narrow, medium, wide, and elliptical beams, allows for precise customization.

FEATURES

Construction: Extruded Aluminum
Color Temperature: RGB/ RGB+30K/ RGB+40K/ RGB+65K
CRI: 90+
Voltage: 120–277V
Control: DMX
WiFi Controls: iOS/Android
Operating frecuency: 50/60 Hz
Power Consumption: 9 watt per ft.
Lumen Output: 270 lumens per foot
Max run: Linkable up to 28 foot
Life: 70,000 Hours
Listing: ETL Listed, IP66 Outdoor/ Wet Location
Warranty: 5 years carefree for parts & components (Labor not included)

Size	Wattage	Lumens
12"	9W	270lms
48"	36W	1080lms

SPEC GRADE · 5 YEAR WARRANTY · cETLus · WET · IP66 · MULTI-OPTICS · WALL WASH · RGBW

ORDERING INFORMATION Example:

| Model	Length	Optics	Color Temp	Finish	Mounting	Accessories	Control[3]
11245-RGBW	**1** 1 ft. **4** 4 ft.	**10** 10° **25** 25° **35** 35° **WW**[1] 20° x 50°	**RGB** RGB **RGBW30** RGB + W (3000K) **RGBW40** RGB + W (4000K) **RGBW65** RGB + W (6500K)	**BK** Black **WH** White **TG** Titanium Grey	**ST**[2] Standard Tilting **ET** Extended Tilting **ST** Stake	**LC1** 1 ft. Link Cable **LC3** 3 ft. Link Cable **LC6** 6 ft. Link Cable **HC6** 6 ft. Hardwire Cable **HC10** 10 ft. Hardwire Cable **LV** Symmetric Anti–Glare Louver	**WIFI** Mobile Application + WiFi **RF** RF Remote Control (White) **DMX** DMX Wall Control (White) **DMX-W-WIFI** DMX Wall Control (White) + WiFi **DMX-B-WIFI** DMX Wall Control (Black) + WiFi

1 For wall wash applications
2 Two Standard Tilting brackets are included. Further information in Pg. 3.
3 See Control Options on page 2.

LINE DRAWINGS

2.47"

1.41"

6.54"

11.81"

2.09"

11245-RGBW-1

31.76"

47.24"

1.97"
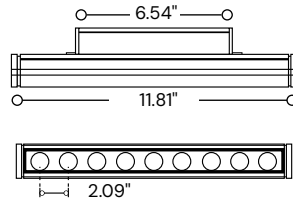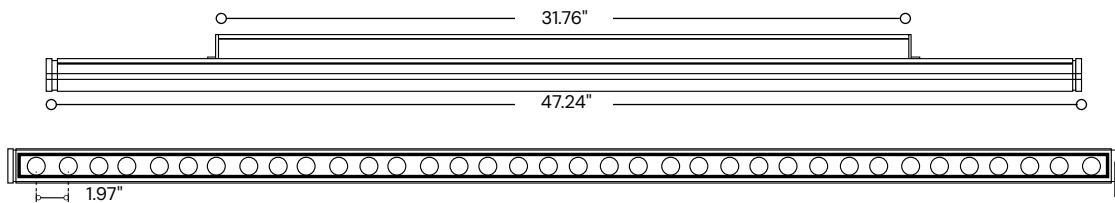
11245-RGBW-4

OPTICS

15°

20°

35°

20° X 50°

RGB DMX CONTROLS

Easy Home
Smart Home

iOS + Android
Application

Mobile Application + WiFi

RF Remote Control
6.38" L x 1.65" W x 0.59" H

DMX Wall Control
5.20" L x 7.09" W x 1.38" H

WiFi-104

iOS + Android

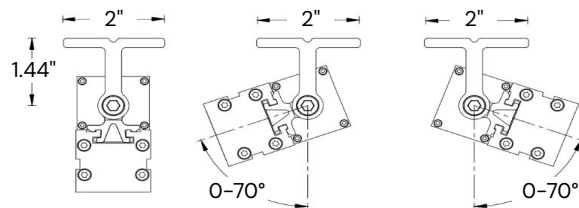DMX Wall Control + WiFi
5.75" L x 4.17" W x 0.43" H

MOUNTING

Standard Tilting

Included with every Fixture

2"   2"   2"

1.44"

0–70°   0–70°

Extended Tilting

Sold separately

2.36"

2.2"

0–90°   0–90°
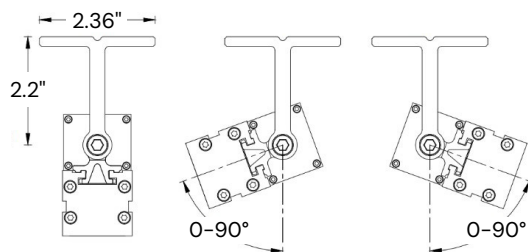
Stake

Sold separately

1.73"   0–90°   0–90°

1.4"

11.5"
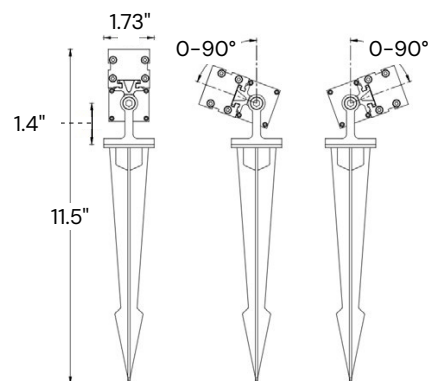
ACCESSORIES

Link Cable

Link extension cable is available in 1 ft., 3 ft., and 6 ft.

LC1
LC3
LC6

Hardwire Cable

Hardwire cable is available in 6 ft. and 10 ft.

HC6
HC10

Symmetric Anti-Glare Louver

LV

3.26"

1.59"