

Project Name: _____ Type: _____ Quantity: _____

INTENDED USE

This outdoor wet location wall sconce is offered in a voltage of 120-277V suitable for residential and commercial applications. Offered in direct & indirect with beam angle adjustment, our wall light fixture is used to accent and create dramatic effects while providing a great source of lighting.

FEATURES

Construction: Fabricated aluminum construction

Lens: Clear glass

Mounting: Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Beam Angles: Set fixture to desired beam angle up and down by adjusting the beam angle tabs on the fixture.

Voltage: 120-277 VAC 60 HZ

Color Temperature: 3000K

Source Lumens: Direct 1,200L | Direct & Indirect 2,400L

Delivered Lumens: Direct 537L | Direct & Indirect 1,025L

CRI: 80+

Life: 50,000 Hours

Minimum Operating Temperature: -4° F / -20°C **Listings:** cETLus listed for Wet Locations, Title 24 JA8 Compliant, ADA compliant


Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)




Black Finish




White Finish



Bronze Finish

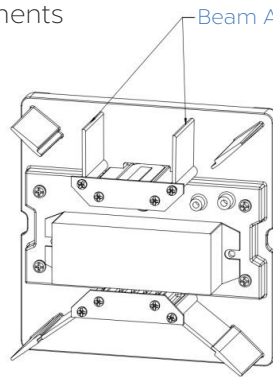

Beam Angle Adjustment

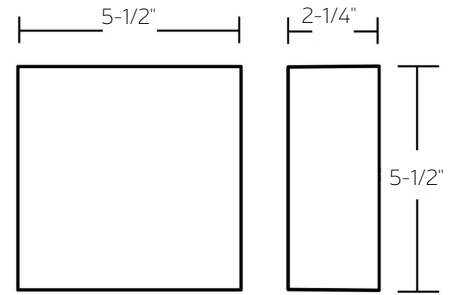

ORDERING INFORMATION Example: (11257-D-BZ)

Model	Light Direction	Finish
11257	D Direct	BK Black
	DI Direct & Indirect	WH White
		BZ Bronze