

Project Name:

Type:

Quantity:

Fixture Specifications

Intended Use

Our architectural specification-grade linear wall-mounted light showcases signs or works of art. The fixture comes with an option to extend the length for highlighting wider works, signs or wall pieces. Constant and evenly distributed illumination from beginning to the end of runs adds value to commercial or residential settings. This indoor architectural extruded cast aluminum product with adjustable swivels is made in America.

Features

Construction: Extruded aluminum

Lens: Frosted



CRI: 90+

Voltage: 24V LED Fixture; 120-277V Triac, ELV, MLV and 0-10V Remote Driver

Average Life: 50,000 hours

Warranty: 5 Years Carefree for Parts & Components (Labor Not Included)

Listings: cETLus, Assembled in the USA, Damp Location Rated

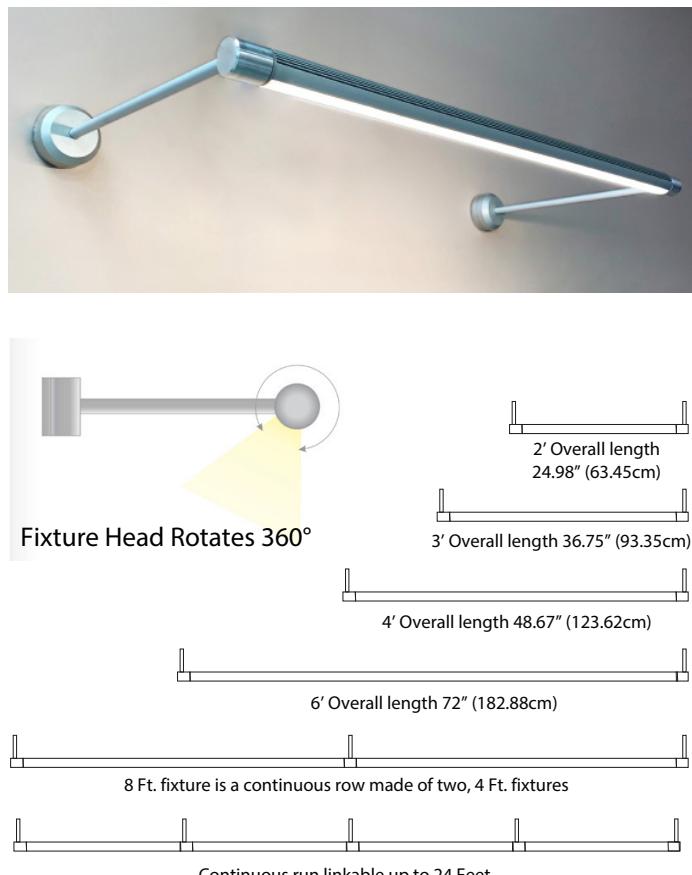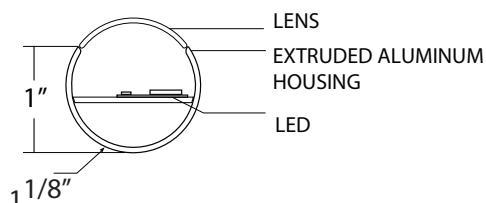

Ordering Information

Example: (11703-2M-27K-6-2-TEM-BA)

Model	Length	Lumens	Finish	Color Temp	Stem Length	Canopy Size	Remote Dimming Driver			
11703	2	2 Foot LO	290L / 3W / FT	BA Standard	Brushed Aluminum	27K 2700K	6"	2 Standard	TEM Standard	TRIAC, ELV, MLV Dimming 100-1%
	3	3 Foot MD	500L / 5.5W / FT	30K	3000K	12	12"	5		
	4	4 Foot HI	784L / 7W / FT	BK	Black	35K 3500K	18	18"	010	0-10V Dimming 100-10%
	6	6 Foot		40K	4000K	24	24"			
	8¹	8 Foot		50K	5000K					
	CR² Continuous Run									

¹ 8 Ft. fixture is a continuous row made of two, 4 Ft. fixtures

² Continuous run linkable up to 24 Feet

^x = Length in feet

COLOR TEMPERATURE GUIDE





REMOTE DIMMING DRIVER SPECIFICATIONS

Driver SKU	Class	Dimensions	Dimming Capabilities	Voltage
TEM-30W	None	L 6.5" (165.1MM) W 3.63" (92.2MM) H 1.03" (26.2MM)	TRIAC, ELV, MLV	100~277V AC
TEM-60W	None	L 7.4" (188MM) W 3.63" (92.2MM) H 1.03" (26.2MM)	TRIAC, ELV, MLV	100~277V AC
TEM-96W	None	L 8.67" (220.2MM) W 3.67" (93.2MM) H 1.62" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-150W	None	L 10.25" (260.3MM) W 4.06" (103.2MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-192W	Class 2	L 11" (279.4MM) W 4" (101.6MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-200W	None	L 10.25" (260.3MM) W 4.06" (103.2MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-288W	Class 2	L 11.85" (300.99MM) W 4.25" (107.95MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
TEM-300W	None	L 10.25" (260.3MM) W 4.06" (103.2MM) H 1.82" (41.1MM)	TRIAC, ELV, MLV	100~277V AC
010-60W	Class 2	L 12.1" (307.3MM) W 2.36" (60MM) H 1.4" (35MM)	0-10V	120~277V AC
010-96W	Class 2	L 12.1" (307.3MM) W 2.36" (60MM) H 1.4" (35MM)	0-10V	120~277V AC